

# Jones

Pattern booklet No.7

Price 25p.

## HOME SEWING AND KNITTING







# Girl's Cable Dress

## Materials

10 (11, 12, 13) oz. of Patons Purple Heather 4-ply; an odd ball of 4-ply wool for waste knitting; a medium-size crochet hook; two buttons.

## Measurements

To fit chest/bust: 26 (28, 30, 32) in.;  
Length from shoulder 23 (25, 27, 29) in.  
Sleeve seam 2½ in.

## Main Tension

7 sts. and 10 rows to 1 in. over st. st.

## Abbreviations

St.(s), stitch(es); st.st., stocking stitch; inc., increase; dec., decrease; rep., repeat; beg., beginning; patt., pattern; N.W.P., non-working position; M.L., make a ladder thus: place next st. on to adjacent needle at right and push empty needle into N.W.P.; in., inch(es).

## Note

Instructions for the larger sizes are in (); where one figure is given, it applies to all sizes.

## Back

\* Set tension 1 size finer than main tension. Cast on by hand 116 (124, 132, 140) sts. and work 6 rows st.st.

Set needle bed for patt. thus: Leave first 15 (19, 13, 17) sts., M.L., leave next 4 sts., M.L., (leave 14 sts., M.L., leave 4 sts., M.L.) 4 (4, 5, 5) times, leave last 15 (19, 13, 17) sts. Always count N.W.P. needles as sts. throughout.

Work 4 rows.

Change to main tension and cable patt. as follows:

Work 7 rows.

## Next row

Remove the 4 sts. between each pair of N.W.P. needles then, counting from right, place 1st and 2nd sts. on to 3rd and 4th needles and 3rd and 4th sts. on to 1st and 2nd needles. Work the row.

These 8 rows form the patt.

Rep. then to 3 in. from cast-on edge. Dec. 1 st. each end of next and every following 22nd row to 108 (116, 124, 132) sts.

Work straight to 18½ (20, 21½, 23) in. from cast-on edge.

## To Shape Armholes


Cast off 4 (5, 6, 7) sts. at beg. of next 2 rows and 3 sts. at beg. of following 4 rows. Dec. 1 st. each end of next and every following alternate row to 76 (80, 84, 88) sts. \*

Work to 5½ (6, 6½, 7) in. from beg. of armholes.

## To Shape Shoulders and Neck

Cast off centre 16 (18, 20, 22) sts. and work on each set of 30 (31, 32, 33) sts. thus: Starting from armhole edge, cast off 5 sts. at beg. of next row, then 2 sts. at beg. of following row.

Rep. these 2 rows 3 times more. Cast off.

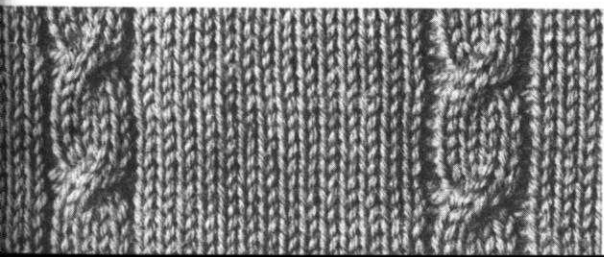



# Man's Fairisle Round Neck Jumper

## Front

As back from \* to \*. Work straight to 3½ (4, 4½, 5) in. from beg. of armholes.

## To Divide for Neck

Cast off centre 8 (10, 12, 14) sts. and work on each set of 34 (35, 36, 37) sts. thus: Cast off 3 sts. at beg. of next and following 3 alternate rows which start at neck edge. Dec. 1 st. at neck edge, on every following 4th row to 22 (23, 24, 25) sts. Work 2 rows straight.

## To Shape Shoulder

Cast off 5 sts. at beg. of next and following 3 alternate rows. Work 1 row. Cast off.

## Sleeves

(Alike).—Set main tension. With waste wool cast on 34 (38, 42, 46) sts. over alternate needles. Work 6 rows. Cut off wool.

Change to 4 sizes finer tension. With main wool work 16 rows. Make a hem. Inc. 1 st. at right 68 (76, 84, 92) sts. Change to main tension and work 1 row.

Set needle bed for patt. thus: Leave first 1 (5, 9, 3) sts., M.L., leave next 4 sts., M.L., (leave 14 sts., M.L., leave 4 sts., M.L.) 3 (3, 3, 4) times, leave last 1 (5, 9, 3) sts. Work 1 row.

Proceed in cable patt. as back, but inc. 1 st. each end of next and every following 4th row to 76 (84, 92, 100) sts. Work 3 rows.

## To Shape Top

Cast off 4 (5, 6, 7) sts. at beg. of next 2 rows and, 3 sts. at beg. of next 4 rows. Dec. 1 st. each end of next and every following alternate row to 38 (40, 42, 44) sts. Work 1 row. Cast off 2 sts. at beg. of next 4 rows and 3 sts. at beg. of following 4 rows.

Cast off.

## Neckband

Set main tension. With waste wool cast on 52 (54, 56, 58) sts. over alternate needles. Work 6 rows. Cut off wool.

Change to 4 sizes finer tension. With main wool work 20 rows. Make a hem. Work 1 row. Cast off.

## Belt

Set main tension. Cast on by hand 16 sts. and st.st. 44 in. or required length.

Cast off.

## To Complete

Press work. Join seams leaving 1 in. open at neck edge on left shoulder. Hem lower edge. Fold belt in half and stitch centre seam and neaten ends. Stitch cast-off edge of neckband to neck. Work 2 rows of double crochet round shoulder opening making 2 button loops on front. Sew on the buttons.

For cycling, hiking or just lounging around, a super sweater with the Fair Isle touch. In three chest sizes. (For 800 see charts). N.B. Halve R.C. readings for 800.

## Materials

13 (14, 15) oz. of Hayfield Beaulon 4-ply in main colour and 8 (9, 10) oz. in contrasting colour; an odd ball of 4-ply for waste knitting.

## Measurements

To fit chest 36 (38, 40) in.

Length from shoulder 26 (26½, 27) in.

Sleeve seam 17½ (18, 18½) in.

## Tension

T.D.8, producing 15 sts. and 20 rows to 2 in. over Fair Isle patt.

## Abbreviations

St(s)\_, stitch(es); patt., pattern; beg., beginning; rep., repeat; dec., decrease; inc., increase; W.P., working position; N.W.P., non-working position; T.D., tension dial; R.C., row counter; N.S.B., needle selector buttons; R.D., reverse dial; S.L., set lever; in., inch(es); M., main colour; C., contrasting colour.

## Note

Instructions for the larger sizes are in (); where one figure is given, this applies to all sizes.

## Back

Push 147 (155, 163) needles into W.P. (73 (77, 81) at left and 74 (78, 82) at right of centre) and return every alternate needle to N.W.P. T.D. 8. With waste yarn cast on and work 6 rows.

Change to T.D. 5. With M. work 42 rows. Make a hem.

Change to T.D. 8. R.C. to 0. Now proceed in Fair Isle patt., noting that every four movements of the carriage (registered as 4 on the row counter) produce only 2 rows of knitting.

Holding cam levers I. Slide dial on 1. Both Part buttons.

**Rows 1 and 2.** N.S.B. 1. R.D. on A. S.L. to set. With C. work the rows.

**Rows 3 and 4.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 5 and 6.** N.S.B. 1 and 2. R.D. on A. S.L. to set. With C. work the rows.

**Rows 7 and 8.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 9 and 10.** N.S.B. 1, 2 and 3. R.D. on A. S.L. to set. With C. work the rows.

**Rows 11 and 12.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 13 and 14.** N.S.B. 1, 2, 3 and 4. R.D. on A. S.L. to set. With C. work the rows.

**Rows 15 and 16.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 17 and 18.** N.S.B. 2, 3, 4 and 5. R.D. on A. S.L. to



set. With C. work the rows.

**Rows 19 and 20.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 21 and 22.** N.S.B. 3, 4, 5 and 6. R.D. on A. S.L. to set. With C. work the rows.

**Rows 23 and 24.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 25 and 26.** N.S.B. 4, 5, 6 and 7. R.D. on A. S.L. to set. With C. work the rows.

**Rows 27 and 28.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 29 and 30.** N.S.B. 5, 6, 7 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 31 and 32.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 33 and 34.** N.S.B. 3, 6, 7 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 35 and 36.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 37 and 38.** N.S.B. 4, 7 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 39 and 40.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 41 and 42.** N.S.B. 3, 4, 5 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 43 and 44.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 45 to 48.** As rows 37 to 40

**Rows 49 and 50.** N.S.B. 3, 6 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 51 and 52.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 53 and 54.** N.S.B. 5 and 8. R.D. on A. S.L. to set. With C. work the rows.

**Rows 55 and 56.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 57 and 58.** N.S.B. 4 and 7. R.D. on A. S.L. to set. With C. work the rows.

**Rows 59 and 60.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 61 and 62.** N.S.B. 3 and 6. R.D. on A. S.L. to set. With C. work the rows.

**Rows 63 and 64.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 65 and 66.** N.S.B. 2 and 5. R.D. on A. S.L. to set. With C. work the rows.

**Rows 67 and 68.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 69 and 70.** N.S.B. 1 and 4. R.D. on A. S.L. to set. With C. work the rows.

**Rows 71 and 72.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 73 and 74.** N.S.B. 1, 3 and 6. R.D. on A. S.L. to set. With C. work the rows.

**Rows 75 and 76.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 77 and 78.** N.S.B. 1, 2 and 5. R.D. on A. S.L. to set. With C. work the rows.

**Rows 79 and 80.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 81 and 82.** N.S.B. 1, 4, 5 and 6. R.D. on A. S.L. to set. With C. work the rows.

**Rows 83 and 84.** R.D. on B. S.L. to set. With M. work the rows.

**Rows 85 to 88.** As rows 77 to 80.

**Rows 89 and 90.** N.S.B. 1, 2, 3 and 6. R.D. on A. S.L. to set. With C. work the rows.

**Rows 91 and 92.** R.D. on B. S.L. to set. With M. work the rows.

Rows 13 to 92 form the patt. which is repeated throughout. Continue in patt. until R.C. registers 316.

### To Shape Armholes

R.C. to 0. Cast off 6 sts. at beg. of next 2 rows. Work 2 rows (4 rows registered on R.C.)

Dec. 1 st. each end of next row. Work 3 rows. Rep. last 4 rows until 115 (119, 123) sts. remain. Work straight until R.C. registers 164 (172, 180).

### To Shape Shoulders

Cast off 6 sts. at beg. of next 2 rows. Work 2 rows. Rep. last 4 rows 4 times: 55 (59, 63) sts. Cast off 5 (6, 7) sts. at beg. of next 2 rows. Work 2 rows. Cast off.

### Front

As back to completion of armhole shaping: 115 (119, 123) sts. Work straight until R.C. registers 124 (132, 140).

### To Divide for Neck

R.C. to 0. Cast off centre 21 (23, 25) sts. and work on first set of 47 (48, 49) sts. as follows:

Work 1 row.

\* Cast off 3 sts. at beg. of next and following alternate row. Work 7 rows. Dec. 1 st. at neck edge on next and every following 4th row to 35 (36, 37) sts. Work straight until R.C. registers 40 (41 rows for other side), so ending at armhole edge.

### To Shape Shoulder

Cast off 6 sts. at beg. of next row. Work 3 rows. Rep. last 4 rows 4 times: 5 (6, 7) sts. Cast off. \*

Join yarn to inner end of remaining sts. and work 2 rows. Now work as given for first side from \* to \*, noting the bracketed exception.

### Sleeves

(Alike).—Push 73 (77, 81) needles into W.P. (36 (38, 40) at left end and 37 (39, 41) at right of centre) and return every alternate needle to N.W.P. Work as back to completion of hem.

T.D.8. Proceed in patt. as given for back, but inc. 1 st. each end of every 12th row to 119 (123, 127) sts. Work straight until R.C. registers 312 (320, 332).

### To Shape Top

Cast off 6 sts. at beg. of next 2 rows. Work 3 rows. Dec. 1 st. each end of next row. Rep. last 4 rows until 67 (69, 71) sts. remain. Work 2 rows. Cast off 4 sts. at beg. of next 2 rows. Rep. last 4 rows until 19 (21, 23) sts. remain.

Work 2 rows.


Cast off.

### Neckband

T.D.8. With waste yarn cast on 77 (80, 83) sts. over alternate needles and work 6 rows. Change to T.D.5. With M. work 8 rows. Change to T.D.4. and work 8 rows. Change to T.D.3. and work 16 rows. Change to T.D.4. and work 8 rows. Change to T.D.5. and work 8 rows. make a hem. Work 1 row. Cast off loosely.

### To Complete

Press work. Join shoulder seams. Set in sleeves, then join side and sleeve seams. Join seam of neckband and sew to neck.

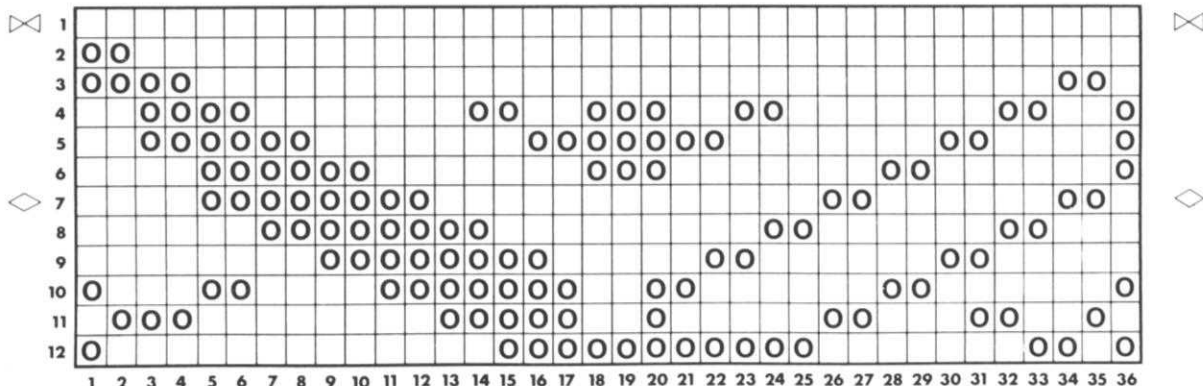

# Man's V-neck Cardigan



A practical cardigan is the style men never tire of wearing. Chest sizes 38 in. to 44 in. are given.

## Materials

17 (18, 19, 20) oz. of Ladyship Renown, 4-ply; an odd ball of 4-ply for waste knitting; 6 buttons.

## Measurements

To fit chest 38 (40, 42, 44) in.

Length from shoulder 25½ (26, 26½, 27) in.

Sleeve seam 17½ (18, 18½, 19) in.

## Main Tension

15 sts. and 21 rows to 2 in. over the stocking stitch.

## Abbreviations

St(s)\_, stitch(es); st.st., stocking stitch; inc., increase; dec., decrease; beg., beginning; in., inch(es).

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

## Maximum No. of needles used.

155 (163, 171, 179).

## Back

Set main tension. With waste wool cast on 78 (82, 86, 90) sts. over alternate needles and work 6 rows. Cut off waste wool. Change to 4 sizes finer tension. With main wool work 44 rows, then make a hem by placing the loops of first row in main wool on to the empty needles 155 (163, 171, 179) sts.

Change to main tension and proceed in st.st. to 17 in. from lower edge.

## To Shape Armholes

Cast off 5 (6, 7, 8) sts. at beg. of next 2 rows. Dec. 1 st. each end of next 8 rows, then dec. 1 st. each end of every following alternate row until 117 (121, 125, 129) sts. remain. Work straight to 8½ (9, 9½, 10) in. from beg. of armholes.

## To Shape Shoulders

Cast off 7 sts. at beg. of next 10 rows and 6 (7, 8, 9) sts. at beg. of following 2 rows. Cast off remaining 35 (37, 39, 41) sts.

## Left Front

Set main tension. With waste wool cast on 38 (40, 42, 44) sts. over alternate needles and work 6 rows. Cut off waste wool.

Change to 4 sizes finer tension. With main wool work 44 rows, then make a hem 75 (79, 83, 87) sts.

Change to main tension and proceed in st.st. to 17 in. from lower edge, ending left of needle bed.

## To Shape Armhole and Front Edge. Next row

Cast off 5 (6, 7, 8) sts. at beg. and dec. 1 st. at end. Dec.

# Man's Cable Sweater

1 st. at armhole edge on next 8 rows and dec. 1 st. at front edge on the 5th of these rows. Continue to dec. 1 st. at front edge on every 5th row **and at the same time** dec. 1 st. at armhole edge on every alternate row until 51 (53, 55, 56) sts. remain. Now dec. 1 st. at front edge only on every 5th row to 41 (42, 43, 44) sts. Work straight to  $8\frac{1}{2}$  (9,  $9\frac{1}{2}$ , 10) in. from beg. of armhole, ending at armhole edge.

## To Shape Shoulder

Cast off 7 sts. at beg. of next and following 4 alternate rows. Work 1 row. Cast off.

## Right Front

Work as given for left front, reversing all shaping.

## Sleeves

(Alike).—Set main tension. With waste wool cast on 40 (42, 44, 46) sts. over alternate needles and work 6 rows. Cut off waste wool.

Change to 4 sizes finer tension. With main wool work 44 rows, then make a hem 79 (83, 87, 91) sts.

Change to main tension and proceed in st.st., but inc. 1 st. each end of next and every following 8th row to 119 (123, 127, 131) sts.

Work straight to  $17\frac{1}{2}$  (18,  $18\frac{1}{2}$ , 19) in. from lower edge.

## To Shape Top

Cast off 5 (6, 7, 8) sts. at beg. of next 2 rows. Dec. 1 st. each end of next 8 rows, then dec. 1 st. each end of every following alternate row to 65 (63, 61, 59) sts. Cast off 3 sts. at beg. of next 16 (14, 12, 10) rows. Cast off remaining 17 (21, 25, 29) sts.

## Border

Set tension 1 size finer than main tension. With main wool cast on by hand 20 sts. and work 8 rows st.st.

Make buttonholes over the 5th, 6th and 7th sts. and the 14th, 15th and 16th sts.

Continuing in st.st., make 5 more pairs of buttonholes 3 in. apart. Work until border, slightly stretched, fits up left front, round neck and down right front.

Cast off.

## To Complete

Press work on wrong side with a warm iron over a damp cloth. Join shoulder seams, set in sleeves, then join side and sleeve seams. Sew on the border, right sides facing, double to wrong side and slipstitch in position. Neaten the buttonholes and add the buttons.

Press all the seams carefully.

## Cable Comfort

The kind of sweater all men like . . . the neat cable panels add interest to this classic style. Chest sizes 38 in. to 44 in.

## Materials

16 (17, 18, 19) oz. Wendy 4-ply Nylonised; an odd ball of 4-ply yarn for waste knitting.

## Measurements

To fit chest 38 (40, 42, 44) in.  
Length from shoulder  $25\frac{1}{2}$  (26,  $26\frac{1}{2}$ , 27) in.  
Sleeve seam  $17\frac{1}{2}$  (18,  $18\frac{1}{2}$ , 19) in.

## Main Tension

15 sts. and 20 rows to 2 in. over st.st.

## Abbreviations

St(s), stitch(es); st.st., stocking stitch; inc., increase; dec., decrease; beg., beginning; patt., pattern; N.W.P. non-working position; M.L., make a ladder thus: place next st. on to adjacent needles at right and push empty needle into N.W.P.; in., inch(es).

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

## Maximum No. of needles used

159 (165, 171, 178).

## Back

\* Set main tension. With waste yarn cast on 77 (81, 85, 89) sts. over alternate needles and work 6 rows. Cut off waste yarn. Change to 4 sizes finer tension. With main yarn work 44 rows, then make a hem by placing the loops of first row in main yarn on to the empty needles.

Inc. 1 st. at right of needle bed 154 (162, 170, 178) sts.

Change to main tension and work 2 rows.

Set needle bed for patt. thus: counting from right, leave first 29 (31, 33, 35) sts., M.L., leave next 4 sts., M.L., leave 6 sts., M.L., leave 4 sts., M.L., leave 27 (29, 31, 33) sts., M.L., leave 4 sts., M.L., leave 27 (29, 31, 33) sts., M.L., leave 4 sts., M.L., leave 6 sts., M.L., leave 4 sts., M.L., leave last 29 (31, 33, 35) sts. Always count N.W.P. needles as sts. throughout.

Work cable panels as follows

Work 7 rows.

## Next row


Remove the 4 sts. between each pair of N.W.P. needles, then place 1st and 2nd sts. on to 3rd and 4th needles and 3rd and 4th sts. on to 1st and 2nd needles. Work the row.

These 8 rows form the patt. which is repeated throughout. Work to 17 in. from lower edge.

## To Shape Armholes

Cast off 5 (6, 7, 8) sts. at beg. of next 2 rows, 3 sts. at beg.



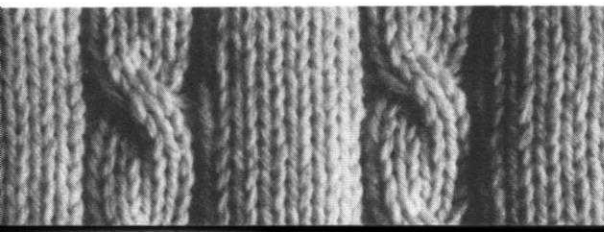

of following 2 rows and 2 sts. at beg. of next 6 rows. Dec. 1 st. each end of next and every following alternate row to 116 (120, 124, 128) sts. \* Work straight to  $8\frac{1}{2}$  (9,  $9\frac{1}{2}$ , 10) in. from beg. of armholes.

#### **To Shape Shoulders**

Cast off 6 sts. at beg. of next 10 rows and 5 (6, 7, 8) sts. at beg. of following 2 rows. Cast off remaining 46 (48, 50, 52) sts.

#### **Front**

Work as back from \* to \*. Work straight to 6 ( $6\frac{1}{2}$ ,  $6\frac{3}{4}$ ,  $7\frac{1}{4}$ ) in. from beg. of armholes.

#### **To Divide for Neck**

Cast off centre 14 (16, 18, 20) sts. and work on each set of 51 (52, 53, 54) sts. as follows:

Cast off 3 sts. at beg. of next and following 2 alternate rows which start at neck edge. Dec. 1 st. at neck edge on every following alternate row until 35 (36, 37, 38) sts. remain. Work 6 (6, 10, 10) rows straight, so ending at armhole edge.

#### **To Shape Shoulder**

Cast off 6 sts. at beg. of next and following 4 alternate rows. Work 1 row. Cast off.

#### **Sleeves**

(Alike).—Set main tension. With waste yarn cast on 39 (41, 43, 45) sts. over alternate needles. Work 6 rows. Cut off waste yarn.

Change to 4 sizes finer tension. With main yarn work 44 rows, then make a hem as back welt 77 (81, 85, 89) sts.

Change to main tension and proceed in st.st. but inc. 1 st. each end of every 7th row to 115 (121, 125, 129) sts. Work straight to  $17\frac{1}{2}$  (18,  $18\frac{1}{2}$ , 19) in. from lower edge.

#### **To Shape Top**

Cast off 5 (6, 7, 8) sts. at beg. of next 2 rows, 3 sts. at beg. of following 2 rows, and 2 sts. at beg. of next 6 rows. Dec. 1 st. each end of next and every following alternate row to 61 (61, 59, 57) sts. Work 1 row. Cast off 3 sts. at beg. of next 16 (14, 12, 10) rows. Cast off.

#### **Collar**

Set main tension. With waste yarn cast on 80 (83, 86, 89) sts. over alternate needles. Work 6 rows. Change to 3 sizes finer tension and with main yarn work 8 rows. Change to 1 size finer tension and work 8 rows; change to 1 size finer tension and work 16 rows; change to 1 size larger tension and work 8 rows; change to 1 size larger tension and work 8 rows.

Make hem as for back welt. Work 1 row. Cast off.

#### **To Complete**

Press work. Join shoulder seams, set in sleeves, then join side and sleeve seams. Join seam of collar, then sew cast-off edge to neck.

# Child's Round Neck Sweater

## Bright stripes on a comfortable raglan sweater for a gay lad.

We chose fawn for the main colour and emerald and orange for the contrasting colours.

The instructions for chest sizes 24 in., 26 in. and 28 in. given.

### Materials

6 (7, 7) oz. of Wendy 4-ply Nylonised in a light colour and 1 oz. each in medium and dark contrasting colours; an odd ball of 4-ply wool for waste knitting; a 4-in. zip fastener.

### Measurements

To fit chest 24 (26, 28) in.

Length from shoulder 14 (15½, 17) in.

Sleeve seam 10½ (12, 13½) in.

### Main Tension

7 sts. and 10 rows to 1 in. over st.st.

### Abbreviations

St(s), stitch(es); st.st., stocking stitch; beg., beginning; inc., increase; dec., decrease; dec. 1 f.f., decrease 1 st. in fully-fashioned way thus: transfer 3rd st. to 4th needle, then move outer sts. up to fill gap; L., light; M., medium; D., dark; in., inch(es).

### Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

Maximum No. of needles used: 113 (121, 129).

### Back

\* Set tension 3 sizes finer than main tension. With waste wool cast on 46 (49, 52) sts. over alternate needles. Work 6 rows.

Cut off waste wool.

Join on L. and work 30 (34, 38) rows.

Make a hem by placing the loops from first row in L. on to the empty needles. Inc. 1 st. at the right of needle bed 92 (98, 104) sts.

Change to main tension and st.st. Work 6 (10, 14) rows. Now, proceeding in a repeated stripe sequence of 4 rows M., 10 rows L., 4 rows D. and 10 rows L., work to 8 (9, 10) in. from lower edge.

### To Shape Raglan

Cast off 2 sts. at beg. of next 2 rows.

Work 2 rows.

Dec. 1 f.f. each end of next row.

Work 3 rows.\*

Dec. 1 f.f. each end of next and every following alternate row until 32 (34, 36) sts. remain.

Work 1 row.

Cast off.

### Front

Work as given for back from \* to \*.



# Child's Pinafore Dress

Dec. 1 f.f. each end of next and every following alternate row until 58 (60, 62) sts. remain.

## To Divide for Neck

Cast off centre 12 (14, 16) sts., then work on each set of 23 sts. thus:

Continue to dec. 1 f.f. at raglan edge on alternate rows **and at the same time** dec. 1 st. at neck edge on every alternate row until 7 sts. remain. Now dec. 1 f.f. at raglan edge only until 3 sts. remain. Dec. 1 st. at neck edge on following alternate row.

Cast off.

## Sleeves

(Alike).—Set the tension 3 sizes finer than the main tension.

With waste wool cast on 24 (26, 28) sts. over alternate needles. Work as given for the welt and hem of the back, then inc. 1 st. at right of needle bed 48 (52, 56) sts.

Change to main tension.

Continuing with L. throughout, proceed in st.st., but inc. 1 st. each end of every 8th row until 68 (74, 80) sts. remain.

Work straight until work measures 10½ (12, 13½) in. from lower edge.

## To Shape Raglan

Work as given for back raglan shaping until 8 (10, 12) sts. remain. Work 1 row.

Cast off.

## Neckband

Set tension 3 sizes finer than main tension. With waste wool cast on 57 (61, 65) sts. over alternate needles. Work as given for welt and hem of back but work 34 rows for all sizes.

Work 1 row.

Cast off loosely.

## To Complete

Press work on wrong side with a warm iron over a damp cloth. Join raglan seams, leaving left back seam open 2½ in. at top for zip fastener, then join side and sleeve seams. Sew on neckband and insert the zip fastener.

Press all the seams carefully.

## Materials

### Pinafore Dress

6 (7, 8) oz. of Wendy Ciro Crepe 4-ply in light colour and 3 (4, 4) oz. of Wendy Ciro Double Crepe in dark colour; a No. 10 Aero crochet hook.

### Sweater

8 (9, 10) oz. of Wendy Ciro Crepe 4-ply in light colour; an odd ball of 4-ply for waste knitting; a 4-in. zip fastener.

**Measurements** To fit chest 24 (26, 28) in.

#### Pinafore Dress

Length 20 (22, 24) in.

#### Sweater

Length 13½ (15, 16½) in.

Sleeve seam 10½ (11½, 13) in.

## Tension

T.D.7, producing 13 sts. and 20 rows to 2 in. over patt. for dress and 29 sts. and 41 rows to 4 in. over st.st. for sweater.

## Abbreviations

St(s)\_, stitch(es); st.st., stocking stitch; patt., pattern; beg., beginning; dec., decrease; inc., increase; T.D., tension dial; R.C., row counter; N.S.B., needle selector button; S.L. set lever; D.C., double crepe; in., inch(es).

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes. For 800, see chart 309 from cassette book.

## PINAFORE DRESS

### Back

T.D.6. With 4-ply cast on by hand 119 (125, 131) sts. (61 (64, 67) at left and 58 (61, 64) at right of centre). St.st. 10 rows.

Set for weaving patt. as follows: T.D.7. R.C. to 0. Holding cam levers I. Reverse lever on A. Slide dial on 1. Set weaving knobs and levers to T position and press plain button.

**Rows 1 and 2.** N.S.B. 1, 3 and 5. S.L. to set. Lay D.C. across needles and work to end.

**Rows 3 and 4.** N.S.B. 2, 4 and 7. S.L. to set. Lay D.C. across needles and work to end.

**Rows 5 and 6.** N.S.B. 3, 6 and 8. S.L. to set. Lay D.C. across needles and work to end.

**Rows 7 and 8.** N.S.B. 1, 5 and 7. S.L. to set Lay D.C. across needles and work to end.

**Rows 9 and 10.** As rows 5 and 6.

**Rows 11 and 12.** As rows 3 and 4. These 12 rows form the patt. Continue in patt. but dec. 1 st. each end of next and every following 10th (11th, 12th) row until 93 (99, 105) sts. remain. Proceed straight until R.C. registers 146 (160, 176).

### To Shape Armholes

R.C. to 0. Cast off 3 sts. at beg. of next 6 rows. Dec. 1 st. each end of next and every following alternate row until 65 (71, 77) sts. remain. Work straight until R.C. registers 46 (50, 56).

### To Shape Neck

Cast off centre 15 (17, 19) sts. and work on first set of 25 (27, 29) sts. as follows: \* Cast off 2 sts. at neck edge on following 4 alternate rows. Work 2 rows, so ending at armhole edge.

### To Shape Shoulder

Cast off 3 (4, 4) sts. at beg. of next and following 3 alternate rows. Work 1 row. Cast off \*.

Join wool to inner end of remaining sts. and work 1 row. Now work as given for first side from \* to \*.

### Front

Work as given for back to completion of armhole shaping 65 (71, 77) sts. Work straight until R.C. registers 36 (40, 46).

### To Divide for Neck

Cast off centre 13 (15, 17) sts. and work on first set of 26 (28, 30) sts. as follows:

\*\* Dec. 1 st. at neck edge on every alternate row until 17 (19, 21) sts. remain.

Work 2 rows, so ending at armhole edge.

### To Shape Shoulder

Cast off 3 (4, 4) sts. at beg. of next and following 3 alternate rows. Work 1 row. Cast off \*\*.

Join wool to inner end of remaining sts. and work 1 row. Now work as given for first side from \*\* to \*\*.

## SWEATER

### Back

T.D.3. With waste wool cast on 48 (52, 56) sts. over alternate needles and work 6 rows. Cut off wool.

With 4-ply crepe work 44 rows. Make a hem by placing the loops of first row in 4-ply crepe on to the empty needles 95 (103, 111) sts. R.C. to 0. T.D.7. St.st. 68 (78, 88) rows.

### To Shape Armholes



R.C. to 0. Cast off 3 sts. at beg. of next 4 rows. Dec. 1 st. each end of next and every following alternate row until 77 (81, 85) sts. remain. Work straight until R.C. registers 36 (40, 46).

### To Divide for Back Opening

R.C. to 0. Place centre st. on to adjacent needle and work on first set of 38 (40, 42) sts. as follows: Work 16 rows (17 rows for 2nd side), so ending at armhole edge.

### To Shape Shoulder

Cast off 6 sts. at beg. of next and following 2 alternate

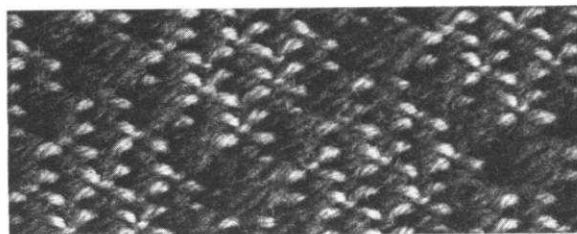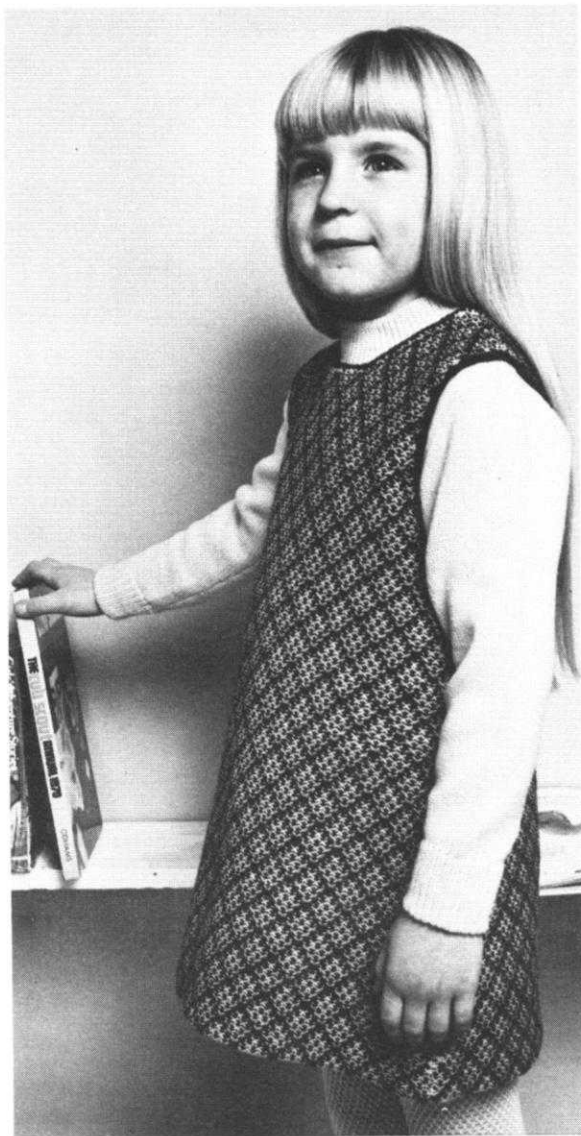



# Child's Mock-rib Sweater

rows and 4 (5, 6) sts. at beg. of following alternate row. Work 1 row. Cast off remaining 16 (17, 18) sts.

Join wool to inner end of remaining 38 (40, 42) sts. and work as given for first side, noting the bracketed exception.

## Front

Work as given for back to completion of armhole shaping 77 (81, 85) sts.

Work straight until R.C. registers 30 (34, 40).

## To Divide for Neck

Cast off centre 15 (17, 19) sts. and work on first set of 31 (32, 33) sts. as follows:

Dec. 1 st. at neck edge on every alternate row until 22 (23, 24) sts. remain.

Work 4 rows straight (5 rows for 2nd side), so ending at armhole edge.

## To Shape Shoulder

Cast off 6 sts. at beg. of next and following 2 alternate rows. Work 1 row. Cast off.

Join wool to inner end of remaining sts. and work as given for first side, noting the bracketed exception.

## Sleeves

(Alike).—T.D.3. With waste wool cast on 27 (29, 31) sts. over alternate needles and work 6 rows. Cut off wool. With 4-ply crepe work 44 rows, then make a hem as before 53 (57, 61) sts.

R.C. to 0. T.D.7. Proceed in st.st., but inc. 1 st. each end of 7th and every following 8th row until there are 73 (79, 85) sts. Work straight until R.C. registers 88 (98, 112).

## To Shape Top

Cast off 3 sts. at beg. of next 4 rows. Dec. 1 st. each end of next and every following alternate row until 45 (49, 53) sts. remain.

Work 1 row. Cast off 2 sts. at beg. of next 4 rows, 3 sts. at beg. of following 4 rows and 4 sts. at beg. of next 4 rows. Cast off.

## Neckband

T.D.3. With waste wool cast on 59 (63, 67) sts. over alternate needles and work 6 rows. Cut off wool.

T.D.4. With 4-ply crepe work 10 rows. T.D.3. and work 14 rows. T.D.4. and work 10 rows. Make a hem. Work 1 row. Cast off loosely.

## To Complete

Press work on wrong side with a warm iron over a damp cloth.

**Pinafore Dress.** Join shoulder and side seams then hem lower edge. With D.C. work a row of double crochet round neck and armholes.

**Sweater.** Join shoulder seams, set in sleeves, then join side and sleeve seams. Sew cast-off edge of neckband to neck and insert zip fastener in back opening.

## Materials

6 (7, 8) 25-grm. balls of Twilleys "Cortina" Super Crochet (4-ply) Wool, an odd ball of yarn for waste knitting; a 4-in. zip fastener.

## Measurements

To fit chest 22 (24, 26) in.

Length from shoulder 13½ (15, 16½) in.

Sleeve seam 9½ (11, 12½) in.

## Main Tension

15 sts. and 20 rows to 2 in. over patt.

## Abbreviations

St(s), stitch(es); inc., increase; dec., decrease; rep., repeat; beg., beginning; patt., pattern; N.W.P., non-working position; W.P., working position; N.B., needle bed.

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes. Maximum No. of needles used 98 (102, 107).

## Back

\* Set main tension. With waste yarn cast on 46 (50, 54) sts. over alternate needles and work 6 rows. Cut off waste yarn. Change to 3 sizes finer tension. With main wool work 42 rows. Make a hem by placing the loops of first row in main wool on to the empty needles 91 (99, 107) sts. Work the row.

Set N.B. for patt. as follows: Place every 4th st. on to its adjacent needle and return empty needles to N.W.P., but count then as sts. throughout.

Change to main tension.

Work to 9 (10, 11) in. from lower edge.

## To Shape Armholes

Cast off 3 sts. at beg. of next 2 rows, 2 sts. at beg. of following 2 rows, then dec. 1 st. each end of next and every following alternate row to 73 (77, 81) sts. \*

Work straight to 4½ (5, 5½) in. from beg. of armholes.

## To Shape Shoulders

Cast off 6 (7, 8) sts. at beg. of next 2 rows and 8 sts. at beg. of following 4 rows. Cast off.

## Front

Work as given for back from \* to \*. Work straight to 2 (2½, 3) in. from beg. of armholes, ending at right of N.B.

## To Shape Neck

Cast off centre 9 (11, 13) sts. then work on first set of 32 (33, 34) sts. as follows:

Dec. 1 st. at neck edge on every alternate row until 22 (23, 24) sts. remain.

Work to 4½ (5, 5½) in. from beg. of armhole, ending at armhole edge.



### To Shape Shoulder

Cast off 6 (7, 8) sts. at beg. of next row and 8 sts. at beg. of following alternate row. Work 1 row. Cast off.

Join wool to inner end of remaining sts. and work to match first side.

### Sleeves

(Alike).—Set main tension. With waste yarn cast on 24 (26, 28) sts. over alternate needles. Work 6 rows. Cut off yarn.

Change to 3 sizes finer tension. With main wool work 42 rows. Make a hem 47 (51, 55) sts.

Set N.B. for patt. as given for back.

Change to main tension.

Proceed in patt. but inc. 1 st. each end of the 5th and every following 8th (10th, 12th) row to 65 (69, 73) sts.

Work straight to 9½ (11, 12½) in. from lower edge.

### To Shape Top

Cast off 3 sts. at beg. of next 2 rows and 2 sts. at beg. of following 2 rows. Dec. 1 st. each end of every following

alternate row to 35 sts. Cast off 2 sts. at beg. of next 4 rows and 3 sts. at beg. of following 4 rows.

Cast off remaining 15 sts.

### Collar


Join right shoulder seam. Place 98 (102, 106) needles into W.P. With wrong side of work facing and beg. from right of N.B. hook up 29 (31, 33) sts. from back neck, 30 sts. from right side of front neck, 9 (11, 13) sts. from centre front, and 30 sts. from left side of front neck.

Set main tension and work 1 row. Place the 2nd and every following alternate st. on to adjacent needle and return empty needles to N.W.P. Set 2 sizes finer than main tension and work 60 rows. Make a hem. Change to main tension. Work 1 row. Cast off loosely.

### To Complete

Press with a warm iron over a damp cloth. Join left shoulder seam, inserting the zip fastener. Set in sleeves, then join side and sleeve seams.

# Child's Coat

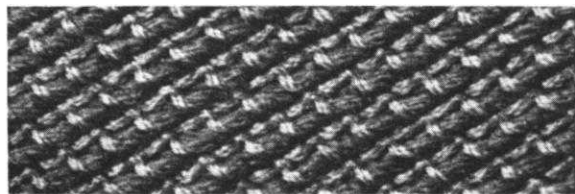

This smart little overcoat in two colours, can be made in chest sizes 22 in., 24 in. and 26 in.

These instructions are suitable only for a Jones knitting machine with weaving apparatus.

## Materials

8 (9, 10) oz. of Patons Purple Heather 4-ply and 5 (6, 7) oz. of Patons Flair; four buttons; a small press fastener; a medium-size crochet hook.

## Measurements

To fit chest 22 (24, 26) in.

Length from shoulder  $17\frac{1}{2}$  (19,  $20\frac{1}{2}$ ) in.

Sleeve seam with cuff turned back  $8\frac{1}{2}$  ( $9\frac{1}{2}$ ,  $10\frac{1}{2}$ ) in.

## Tension

T.D.8, producing 6 sts. and 10 rows to 1 in. over weaving patt.

## Abbreviations

St(s), stitch(es); st.st., stocking stitch; patt., pattern; beg., beginning; dec., decrease; inc., increase; T.D., tension dial; R.C., row counter; R.L., reverse lever; N.S.B., needle selector button; S.L., set lever; in., inch(es).

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

## Back

T.D.7. With 4-ply cast on by hand 109 (115, 121) sts. and work in st.st. for 10 rows. Set for weaving patt. as follows: model KH800 card and chart 8 to obtain the weaving pattern. The 2 rows on card 8 form 2 rows of the pattern. Model KH588: T.D.8. R.C. to 0. Holding cam levers I. Slide dial on 1. Set weaving knobs and levers to T position and press the **plain** button.

**Row 1.** R.L. on A. N.S.B. 1, 3, 5 and 7. S.L. to set. Lay Flair across needles and work to end.

**Row 2.** R.L. on B. N.S.B. 1, 3, 5 and 7. S.L. to set. Lay Flair across needles and work to end. These 2 rows form the patt.

Rep. them 4 times more.

Continue in patt., but dec. 1 st. each end of next and every following 7th (8th, 9th) row until 83 (89, 95) sts. remain.

Work straight until R.C. registers 120 (130, 140).

## To Shape Armholes

R.C. to 0. Cast off 5 sts. at beg. of next 2 rows and 2 sts. at beg. of following 2 rows. Dec. 1 st. each end of next and every following alternate row until 59 (65, 71) sts. remain.

Work straight until R.C. registers 56 (60, 66).

## To Shape Shoulders

Cast off 4 sts. at beg. of next 8 rows and 3 (5, 7) sts. at beg. of following 2 rows. Cast off.

## Left Front

T.D.7. With 4-ply cast on by hand 66 (69, 72) sts. and st.st. 10 rows.

T.D.8. R.C. to 0. Proceed in patt. for 10 rows. Dec. 1 st. at beg. of next row and at this same edge on every following

# Ladies Lace Jumper

7th (8th, 9th) row until 53 (56, 59) sts. remain. Work straight until R.C. registers 120 (130, 140), ending at shaped edge.

## To Shape Armhole

R.C. to 0. Cast off 5 sts. at beg. of next row and 2 sts. at beg. of following alternate row. Work 1 row. Dec. 1 st. at beg. of next and every following alternate row to 41 (44, 47) sts.

Work straight until R.C. registers 39 (43, 49), so ending at front edge.

## To Shape Neck

Cast off 10 sts. at beg. of next row and 5 (6, 7) sts. at beg. of following alternate row. Work 1 row. Dec. 1 st. at beg. of next and every following alternate row to 19 (21, 23) sts., so ending at armhole edge.

## To Shape Shoulder

Cast off 4 sts. at beg. of next and following 3 alternate rows. Work 1 row. Cast off.

Mark four button positions on this front, the top one 1 in. below cast-off edge of neck and the other 3 in. apart.

## Right Front

Work as given for left front, reversing all shaping and making buttonholes to correspond with markers as follows:

Counting from front edge, make a buttonhole over 6th, 7th, 8th and 9th sts.

## Sleeves

(Alike).—T.D.10. With Flair cast on by hand 37 (41, 45) sts. and st.st. 14 rows. T.D.8. R.C. to 0. Join on 4-ply and proceed in patt., but inc. 1 st. each end of 11th and every following 5th row until there are 65 (71, 77) sts.

Work straight until R.C. registers 86 (96, 106).

## To Shape Top

Cast off 5 sts. at beg. of next 2 rows and 2 sts. at beg. of following 2 rows. Dec. 1 st. each end of next and every following alternate row until 29 (33, 37) sts. remain. Work 1 row. Cast off 2 sts. at beg. of next 8 rows. Cast off.

## Collar

T.D.10. With Flair cast on by hand 74 (78, 80) sts. and st.st. 24 rows. Cast off.

## To Complete

Press work on wrong side with a warm iron over a damp cloth. Join shoulder seams. Set in sleeves, then join side and sleeve seams. Fold collar lengthwise and seam the short ends, then sew cast-on and cast-off edges to neck, beg. and ending  $1\frac{1}{4}$  in. from front edges. Make hem at lower edge. With Flair work a row of double crochet along front edges up to collar, then finish cuffs in the same way. Turn back cuffs. Neaten buttonholes and add the buttons. Secure at neck with press fastener. Press seams.

## Meadow sweet

Very pretty jumper, full of feminine charm, with bell-shaped sleeves and delicate pattern. We give four sizes.

These instructions are suitable only for Jones Lace-maker Knitting Machines.

## Materials

5 (5, 6, 6) oz. of Templeton's H. and O. Shetland Lace; a No. 2.50 crochet hook.

## Measurements

To fit bust 34 (36, 38, 40) in.

Length from shoulder  $20\frac{1}{2}$  (21,  $21\frac{1}{2}$ , 22) in.

Sleeve seam with frill 13 in.

## Tension

T.D.5 producing 13 sts. and 23 rows to 2 in. over lace patt.

## Abbreviations

St(s), stitch(es); st.st., stocking stitch; patt., pattern; rep., repeat; beg., beginning; inc., increase; dec., decrease; T.D., tension dial; N.S.B., needle selector buttons; S.L., set lever.

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

## Back

T.D.4. Cast on by hand 119 (125, 131, 137) sts. (60 (63, 66, 69) sts. to left and 59 (62, 65, 68) sts. to right\* of centre) and work 12 rows st.st.

T.D.5. Work in lace patt as follows: (for 800 see charts) Holding cam levers on I. Reverse dial on A. Slide dial on 1. N.S.B. 1, 3, 5 and 7. S.L. to set. Move lace carriage from left to right. With knitting carriage work 4 rows.

N.S.B.5. S.L. to set. Move lace carriage from left to right. N.S.B.3. S.L. to set. Move lace carriage from right to left. With knitting carriage work 2 rows. N.S.B.6. S.L. to set. Move lace carriage from left to right. N.S.B.2. S.L. to set. Move lace carriage from right to left. With knitting carriage work 2 rows. N.S.B.7. S.L. to set. Move lace carriage from left to right. N.S.B.1. S.L. to set. Move lace carriage from right to left. With knitting carriage work 2 rows. These 10 rows form the patt. which is repeated throughout. Work to 14 in. from cast-on edge.

## To Shape Armholes

Cast off 4 sts. at beg. of next 2 rows, 3 sts. at beg. of following 2 rows, then dec. 1 st. each end of next and every following alternate row to 87 (91, 95, 99) sts.

Work straight to 7 ( $7\frac{1}{2}$ , 8,  $8\frac{1}{2}$ ) in. from beg. of armholes.

## To Shape Shoulder and Back Neck

Cast off centre 31 (33, 35, 37) sts., then work on first set of 28 (29, 30, 31) sts. thus:

\* **Next row.** Cast off 3 sts. at beg., work to end.





For all other models

For model 800

**Next row.** Dec. 1 st. at beg., work to end.  
Rep. last 2 rows 5 times more. Cast off remaining 4 (5, 6, 7) sts.\*

Join wool to inner end of remaining sts. Work 1 row, then proceed as given for first side from \* to \*.

### Front

Proceed as given for back until work measures 5 (5½, 6, 6½) in. from beg. of armholes.

### To Shape Neck

Cast off centre 15 (17, 19, 21) sts. Work on each set of 36 (37, 38, 39) sts. as follows:

Cast off 3 sts. at beg. of next 3 rows which start at neck edge. Dec. 1 st. at neck edge on following 3 alternate rows, then on every following 4th row until 22 (23, 24, 25) sts. remain. Work 2 rows, so ending at armhole edge.

### To Shape Shoulder

Cast off 3 sts. at beg. of next and following 5 alternate rows. Cast off remaining 4 (5, 6, 7) sts.

### Sleeves

(Alike).—T.D.4. Cast on by hand 65 (69, 73, 77) sts. (33 (35, 37, 39) sts. to left and 32 (34, 36, 38) sts. to right of centre). Work 4 rows st.st.

T.D.5. Proceed in patt., but inc. 1 st. each end of 11th and every following 9th row to 85 (89, 93, 97) sts.

Work straight to 9 in. from cast-on edge.

### To Shape Top


Cast off 4 sts. at beg. of next 2 rows, 3 sts. at beg. of following 2 rows, then dec. 1 st. each end of next and every following alternate row to 35 (33, 31, 29) sts. Cast off 2 sts. at beg. of every row until 11 (13, 15, 17) sts. remain. Cast off.

### Frills (Make 2)


T.D.4. Cast on by hand 97 (101, 105, 109) sts. (49 (51, 53, 55) sts. to left and 48 (50, 52, 54) sts. to right of centre) and work 2 rows st.st. T.D.5. Rep. the 10 patt. rows 4 times, then work 4 rows st.st. Cast off loosely.

### To Complete

Press work with a warm iron over a damp cloth. Join shoulder seams. Set in sleeves, then join side and sleeve seams. Join the seam of each frill, then gather the cast-off edges and sew to sleeves. Double the st.st. border at lower edge to wrong side and hem in position. Work 1 row of double crochet then 1 row of treble all round edges of neck and frills.

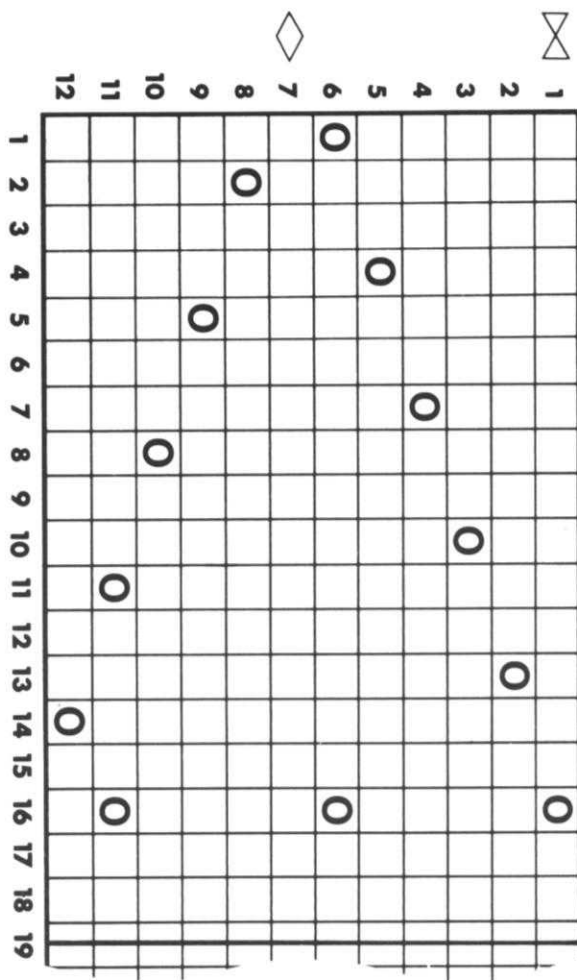

# Woven Gaucho with Matching Sweater

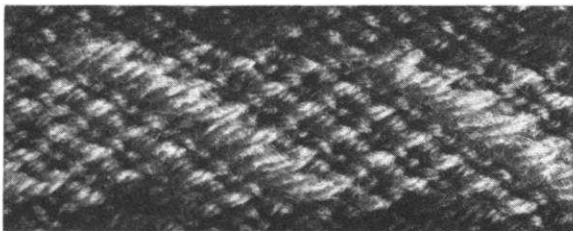

## Look Great in Gauchos

Weave your way into high style with gaucho pants and matching sleeveless top.

These instructions are suitable only for Jones knitting machines with the weaving apparatus.

## Materials

14 (15, 15) oz. of Lister Lavenda 4-ply in beige and 7 (8, 8) oz. each of Lister Lavenda Double Knitting in Coffee Tan and Golden Sand; a pair of No. 8 Aero knitting needles; a waist length of 1½-in. wide petersham ribbon; a 7-in. zip fastener.

## Measurements

### Sweater

To fit bust 32 (34, 36) in.

Length from shoulder 20 (20½, 21) in.

### Pants

To fit hips 34 (36, 38) in.

Inside leg seam 14 in.

## Tension

T.D.8, producing 6 sts. and 11 rows to 1 in. over weaving patt.

## Abbreviations

St(s), stitch(es); st.st., stocking stitch; k., knit; p., purl; dec., decrease; rep., repeat; beg., beginning; patt., pattern; T.D., tension dial; N.S.B., needles selector buttons; S.D., slide dial; S.L., set lever; N.B., needle bed; H.P., holding position; in., inch(es); C., Coffee Tan; G., Golden Sand.

## Note

Instructions for the larger sizes are in (); where one figure only is given, this applies to all sizes.

## SWEATER

### Back

\* T.D.8. With 4-ply wool cast on by hand 100 (106, 112) sts. Work 2 rows st.st.

Now proceed as follows: (For 800 see charts)

Holding cam levers to I. Reverse dial on A. Weaving knobs and levers to T position

**Row 1.** S.D. on 1. N.S.B. 1, 3 and 5. S.L. to set. Lay C. across needles and work the row.

**Row 2.** S.D. on 2. S.L. to set. Lay C. across needles and work the row.

**Row 3.** S.D. on 3. S.L. to set. Lay C. across needles and work the row.

Continue in this way, moving S.D. up 1 number on every row, until row 7 has been worked.

**Row 8.** S.D. on 7. N.S.B. 1, 5 and 7. S.L. to set. Lay G. across needles and work the row.

**Row 9.** S.D. on 6. S.L. to set. Lay G. across needles and work the row.

Continue in this way, moving the S.D. down 1 number on every row, until row 14 has been worked. These 14 rows

form the patt. which is repeated throughout. Work to 12 in. from cast-on edge.

### To Shape Armholes

Cast off 4 sts. at beg. of next 4 rows. Dec. 1 st. each end of next and every following alternate row to 72 (76, 80) sts.\*  
Work straight to 6 (6½, 7) in. from beg. of armholes.

### To Shape Neck

Cast off centre 24 (26, 28) sts. Work on each set of 24 (25, 26) sts. as follows:  
Dec. 1 st. at neck edge on the next 10 rows. Work 2 rows straight. Cast off remaining 14 (15, 16) sts.

### Front

Work as given for back from \* to \*.  
Work straight to 2½ (2¾, 3) in. from beg. of armholes.

### To Shape Neck

Cast off centre 12 sts. Work on each set of 30 (32, 34) sts. as follows:  
Dec. 1 st. at neck edge on every alternate row to 20 (21, 22) sts., then on every following 4th row until 14 (15, 16) sts. remain. Work straight to 7 (7½, 8) in. from beg. of armhole.  
Cast off.

### Welts

(Both alike) —Using the No. 8 needles and 2 strands of C wool together, cast on 78 (82, 86) sts. Work in k.1, p.1 rib for 1 in.  
Cast off loosely in rib.

### Neckband

As welts, but cast on 90 (94, 98) sts.

### Armhole Bands

(Alike).—Using the No. 8 needles and 2 strands of C wool together, cast on 90 (96, 102) sts. Work in k.1, p.1 rib for 1 in., but dec. 1 st. each end of 2nd and every following alternate row.  
Cast off loosely in rib.

## PANTS

### Left Front Leg

\*\* T D 8. With 4-ply wool cast on by hand 84 (87, 90) sts. Work 10 rows st.st. for hem. Now proceed in patt. as given for sweater to 15 in. from cast-on edge, ending left of N B (end right of N.B. for right front leg and left back leg).

Now shape as follows:

Cast off 4 sts. at beg. of next row, then dec. 1 st. at the same edge on next 14 rows 66 (69, 72) sts. Dec. 1 st. each end of every following 7th row until 46 (49, 52) sts. remain. Work straight to 9 in. from beg. of shaping, ending right of N.B. \*\*

Cut off weaving threads. With 4-ply work 4 rows st.st. for hem. Cast off.

### Right Front Leg

Work as given for left front leg, noting the bracketed exception.

### Right Back Leg

Work as given for left front leg from \*\* to \*\*, but end at left on N.B.

\*\*\* Next Row. H.C.L. III. Push last 7 needles at opposite end to carriage into H.P. and work the row.

Next Row. Work the row. Rep. the last 2 rows 4 times more. H.C.L. I. Cut off weaving threads. With 4-ply work 4 rows st.st. for hem. Cast off. \*\*\*

### Left Back Leg

Work as given for left front leg from \*\* to \*\*, noting the bracketed exception.


Now work as right back leg from \*\*\* to \*\*\*.

### To Complete

Press work with a warm iron over a damp cloth.

**Sweater.** Sew on welts. Join shoulder and side seams. Seam the neckband and sew cast-on edge to neck. Join mitred end of armhole bands and sew cast-on edges to armholes.

**Pants.** Join the side seams and inner leg seams, then join the two legs together from front waist round to within 7 in. of back waist. Hem the lower edges of legs. Face down waist hem with petersham ribbon. Insert the zip.

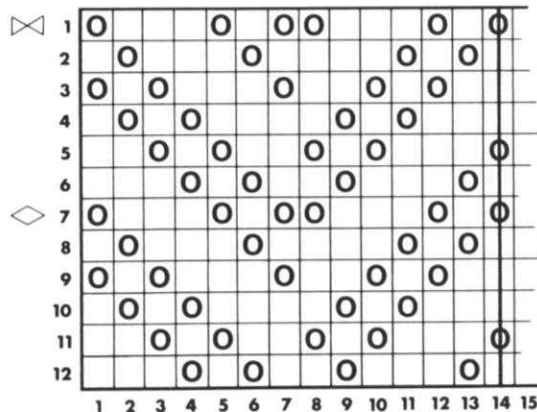



# Ladies Ribbed Jerkin

These instructions are only suitable for a single bed machine with the ribbing attachment.

## Materials

18 (19, 20) 25-grm. balls of Sirdar Courtelle Double Knitting Crepe; six buttons.

## Measurements

To fit bust 32 (34, 36) in.

Length 23 (23½, 24) in.

Sleeve to suit a 17 (17½, 18) in. underarm.

## Main Tension

15 sts. and 20 rows to 2 in. over patt.

## Abbreviations

St(s)\_, stitch(es); st.st., stocking stitch; inc., increase; dec., decrease; rep., repeat; beg., beginning; patt., pattern; B.B., back bed; F.B., front bed; in., inch(es).

## Note

Instructions for the larger sizes are in ( ); where one figure only is given, this applies to all of the sizes.



## Back

Set tension 1 size finer than main tension.

Cast on by hand 97 (103, 109) sts. on B.B. only.

Work 14 rows st.st. for hem.

With flow combs alternate, set F.B. as follows:

Counting from left of needle bed, push every 3rd needle into working position, the first needle to be positioned between the 2nd and 3rd needles on B.B. 129 (137, 145) sts.

Change to main tension and proceed in patt. as follows:

**Row 1.** Work on B.B. only.

**Row 2.** Work on both beds.

These 2 rows form the patt. Rep. them until work measures 16½ in. from cast-on edge.

## To Shape Raglan

Cast off 7 (7, 8) sts. at beg. of next 2 rows. Dec. 1 st. each end of next and every following alternate row until 45 (47, 49) sts. remain, then dec. 1 st. each end of every following 3rd row until 39 (41, 43) sts. remain.

Cast off.

## Front

Work as given for back until front measures 12½ in. from cast-on edge.

## To Divide for Opening

Cast off centre 7 sts. and work on each set of 61 (65, 69) sts. as follows:

Work straight to 16½ in. from cast-on edge ending at side edge.

## To Shape Raglan

Cast off 7 (7, 8) sts. at beg. of next row, then dec. 1 st. at beg. of every following alternate row until 23 (24, 25) sts. remain, so ending at front edge.

## To Shape Neck

Continuing to shape raglan as before, cast off 5 (6, 7) sts. at beg. of next row and 2 sts. at beg. of following 2 alternate rows 12 sts.

Now dec. 1 st. at raglan on next and every following 3rd row **and at the same time** dec. 1 st. at neck edge on every following alternate row until 2 sts. remain. Cast off.

## Sleeves

(Alike).—Set tension 1 size finer than main tension. Cast on by hand 37 (40, 43) sts. on B.B. only.

Work 14 rows st.st. for hem. Set needles on F.B. for rib patt. as given for back 49 (53, 57) sts. Change to main tension and patt. 18 rows.

Keeping patt. correct, inc. 1 st. each end of next and every following 6th row until there are 91 (95, 99) sts.

Work straight to 16½ (17, 17½) in. from cast-on edge. Insert a marker each end of last row to denote top of sleeve seam, then work 8 more rows.

## To Shape Raglan

Dec. 1 st. each end of next and every following alternate row until 19 (23, 23) sts. remain, then each end of every following 3rd row to 15 sts. Work 1 row.

Cast off.

## Belt

Set tension 3 sizes finer than main tension.

Cast on 17 sts. for close rib (9 on B.B. and 8 on F.B.) and work 1 in. Make a buttonhole over centre 5 sts. on next row. Continue in rib until belt measures 4 in. from cast-on edge, then make another buttonhole.

Now work straight until belt measures 36 in. (or length required).

Cast off.

## Neckband

Set tension 3 sizes finer than main tension.

Cast on 133 sts. for close rib (67 on B.B. and 66 on F.B.) and work 11 rows. Cast off loosely.

## To Complete

Join raglan seams, sewing straight part of sleeves above markers to cast off sts. at armholes. Join side and sleeve seams. Hem lower and sleeve edges, then sew cast-on edge of neckband to neck.

**Button border.** Set tension 3 sizes finer than main tension.

Cast on 17 sts. for close rib (9 on B.B. and 8 on F.B.) and work until border, slightly stretched, fits along left edge of front opening. Cast off. Mark 4 button positions on this border, the first 3 in. from cast-on edge, the last ¾ in. from cast-off edge and the others evenly spaced between.

**Buttonhole border.** Work as given for button border but make buttonholes over centre 5 sts. to correspond with markers.

Sew borders in position. Neaten all the buttonholes and sew on buttons to front and belt.



# Jones

---

**-the knitting machine people**

Jones Sewing Machine Co. Ltd.,  
Britannia House, 964 High Road  
Finchley, London N12.