

knitking

magazine

nov/dec '72



NEW! NEW!! NEW!!!

1. THREE COLOR YARN FEEDER

For Easy Multi-Color Knitting - Jacquard Designs, etc. Feeders are Self-Adjusting.
Fits AM 3 Model KNITTING only.
Price - \$17.50 plus \$1.50 Shipping costs (Calif. residents add 88 cents Sales Tax).

2. AUTOMATIC COMPENSATOR FOR INCREASING - DECREASING





Simple to use . . . Overcomes the need to reset Dial when increasing or decreasing . . .

Send your AM 3 Cam Box to KNITTING (pack it in a good sized box stuffed with tightly rolled sheets of newspaper). We will service it completely . . . fit new Controls and supply new set (eleven) of Cams. Your old Cams are not suitable for the new Controls.

Price - \$19.50 plus \$2.00 Shipping costs (Calif. residents add 98 cents Sales Tax).

Order Direct From **KNITTING**

1128 Crenshaw Blvd. • Los Angeles, California 90019

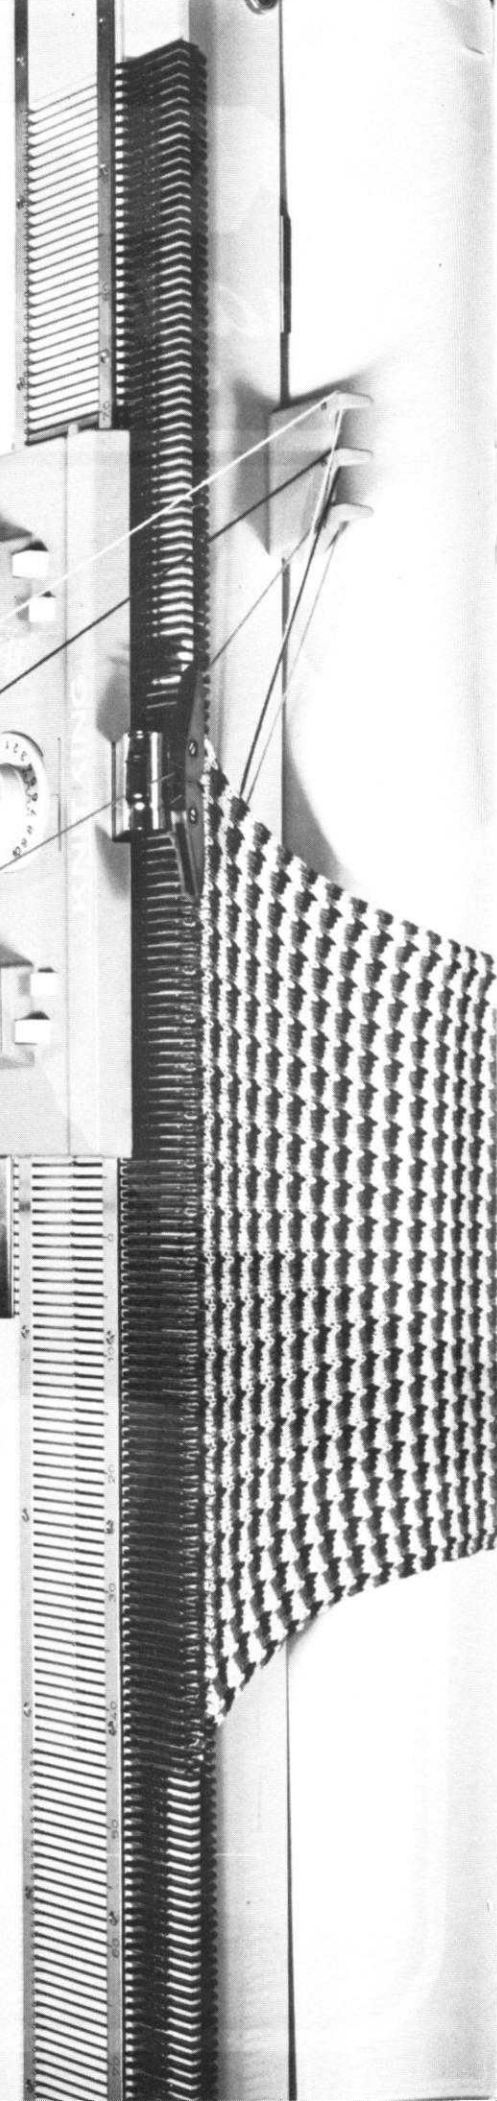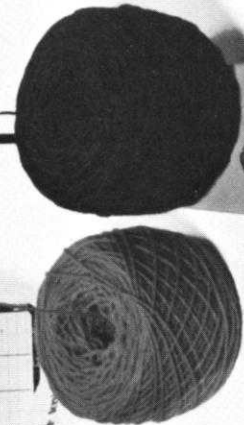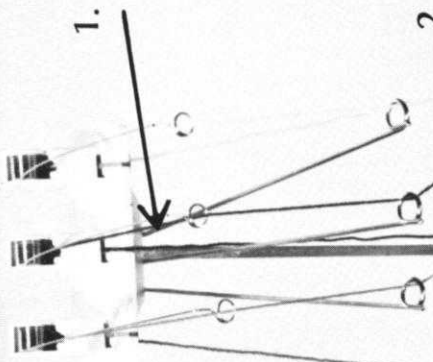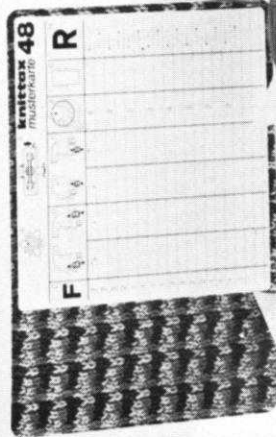

knitking

magazine

editorial

INDEX	PAGE NO.
DK 8126 Woman's Pullover	9
DP 8114 Woman's Pullover	10
DP 8108 Woman's Pullover	11
DP 8119 Woman's Pullover	12
HP 3684 Man's Pullover	13
DK 8120 Woman's Dress and Jacket	14
DK 8123 Woman's Blouse & Skirt	16
DK 8118 Woman's two-piece Dress	16
KK 5392 Boy's Pullover & Jacket	18
MK 5391 Girl's Pullover, Skirt & Jacket	19
DK 8127 Woman's Dress & Coat	21
DK 8125 Woman's Dress	22
MK 5389 Girl's Dress	24
DP 8128 Woman's Pullover	24
MK 5390 Girl's Dress	25
KG 1950 Dickey	26
KG 1949 Humpty	26
KG 1953 Frog	27
KG 1951 Christmas Sock	27
KG 1952 Holiday Slippers	28
KG 1954 Baby Frog	28

There is very obviously a big boom in Handcrafts. More and more people are Doing it Themselves ... Knitting yarns, Knitting Machines, Rug Yarns, Fabrics and Sewing Machines, etc., are selling better than ever ... There is a silent rebellion going on against shoddy merchandise and sky high prices for quality goods ... American consumers are discovering how relatively simple it is to knit or sew their own clothes in the style and size they want them to be ... knowing that when they put them together themselves, there is little possibility of seams popping open at most inopportune times ...

Good quality stylish knit garments as seen in the best stores are either high priced imports or higher priced domestic knits, many of which are produced on Home Knitting Machines ... These latter garments are often beautiful, stylish, and expensive. \$100.00 and up for a dress, the yarn for which, cost less than \$20.00 ... anybody that can afford to pay high prices, can usually afford to pay for the alterations that are frequently necessary in order to adjust a standard size to a body that is not standard.


When you own a Knitting Machine, you can produce a dress for just the cost of the yarn ... and if you really want the dress to look expensive, you should never use poor quality yarn ... When you knit your own clothes, you wear them with far greater joy and pride than if you had purchased them ready made ... and when you feel good, your friends will tell you how good you look.

The five Gold Medals awarded KNITKING Machines for excellence are testimony to the product ... additionally, KNITKING MAGAZINE is acknowledged as the finest Knitting Machine Publication in the English language and gorgeous KNITKING YARNS are unequaled for quality and range ... KNITKING, in fact, provides a complete service to the machine knitter.

More and more women are sewing their own clothes and excellent quality double knit fabrics in wools and acrylics are available from fabric stores at very moderate prices ... McCall's ... Simplicity ... Butterick and other pattern companies publish excellent easy to follow patterns for stylish sewn garments.

With the addition of BABY LOCK sewing machines to our line, we are endeavoring to satisfy a growing need for a new type home sewing machine that works like a commercial overlock machine ... that cuts as it overlocks and at the same time (if needed), sews in a straight stitch that makes it unnecessary to stretch the new stretch materials as you sew them ... If you sew, you owe it to yourself to check into BABY LOCK.

We will be starting 1973 with a stunning assortment of knits for the entire family. The Covers of the January/February edition of KNITKING MAGAZINE feature garments for Mother, Father and three Children. Inside there is a splendid collection of Sporty clothes, an easy to make half sleeve Dress for the Larger Woman and (in response to many requests) some delicious Mother and Baby outfits.

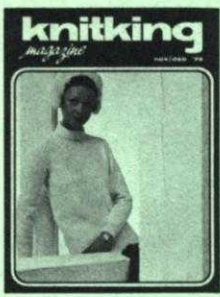

FRONTPIECE

Holiday happiness bubbles over the pages of this issue of KNITKING MAGAZINE ... Choose from a special selection of beautiful garments for the entire family ... Knits are perfect ... for all your gift giving.

COVER MODEL DP 8114

A simple to knit Pullover is made elegant with Cables on the front section. The high rolled Collar


and bands are ribbed. Knit Size 10 with KNITKING Crocus Crepe, Size 14 and 16 with Sport Prima.

BACK COVER DP 8108

The brighter ... the better!! A brilliant display of color for the Norwegian Design bands the upper arm section of the sleeves of a winter Pullover ... The front and back is made with a holding position design and the deep ribbing for the sleeve bands is new and different. We've thrown in a bonus pattern of a matching hat. Size 10 and 12 are made with KNITKING Allegro Dralon; Size 16, Mohana.

Publisher: KNITKING CORPORATION, 1128 Crenshaw Blvd., Los Angeles, Calif. 90019. Telephone: WEbster 8-2079. Published bi-monthly. Subscriptions: USA — \$7.00 annually, single copies \$1.50; Canada — \$8.00; other parts of the world — \$10.00. The entire contents of KNITKING MAGAZINE are copyright and must not be reproduced in any shape or form without the express permission, in writing of the publisher. COPYRIGHT © by KNITKING CORPORATION 1972.

BOOKS by KNITKING

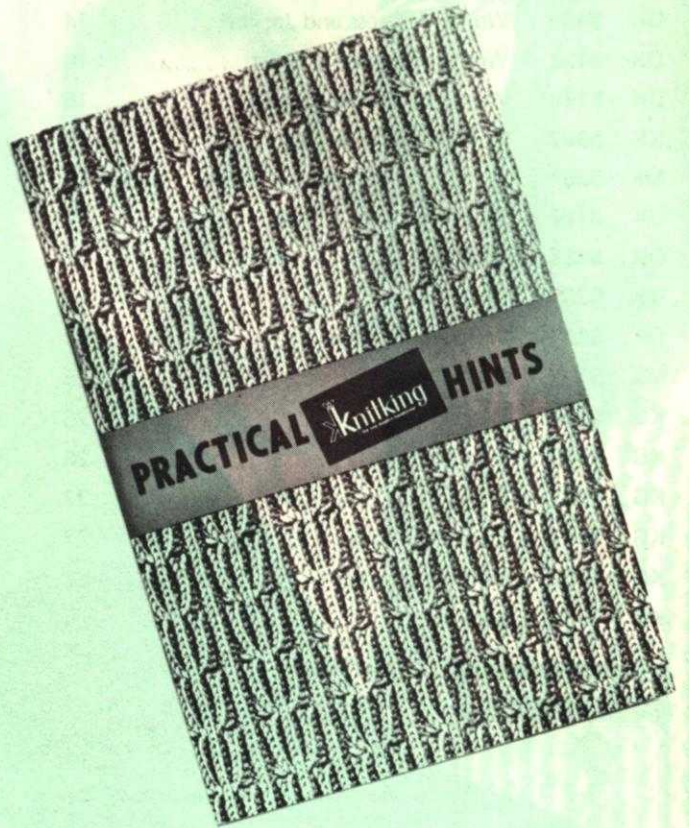

PRACTICAL KNITTING HINTS

We call this book the TEXT BOOK for machine knitters because it answers the many questions that occur in machine knitting, from preparing to knit, taking measurements, shaping, making buttonholes, special effects, bindings, bands and edges, etc., through finishing and blocking. It sells for

\$2.95

40 cents mailing
Calif. residents add 5% Sales Tax

NEW VOLUME AVAILABLE NOW

A complete eighth volume of KNITKING MAGAZINES with a flexible, transparent plastic cover and specially bound so that it will stay open at any page, is available at the special price of \$6.95 (plus 95 cents mailing costs).

If purchased separately the magazines would cost a total of \$9.00.

The volume contains over 120 fully illustrated complete stylish patterns for all members of the family together with many valuable, practical knitting hints.

There is a very limited number of these volumes available and it will undoubtedly become a collectors item.

If you already have the entire set it will almost certainly be well thumbed and marked. Why not purchase a perfect mint condition volume for your bookshelf and ready reference at any time.

Place your order today and avoid disappointment. Send it to KNITKING MAGAZINE, 1128 Crenshaw Boulevard, Los Angeles, California 90019.



Flattering to the full figure

DK 8126 — Vertical lines are slimming to a fuller figure and this attractive Dress is knitted with two colors. The buttons are sewn on top of the ribbed front band which is left open for head room only. Sew on a snap to close the neckline. Knit it with KNITKING Crocus Crepe for Size 14; with Amore for Sizes 16 and 20.




Colorful and in good taste

DP 8119 — Knit this raglan Pullover in an evening . . . and finish it the next day. Take note of the deep ribbing used for the bands . . . the new look for the season. For Size 8, use KNITKING Beatrice; Size 10, Crocus Crepe; Size 14, Mohana.



HP 3684 — Stripe a Pullover Shirt for your Man.
It's quickly knitted in stockinette stitch with a 1 x
1 Rib for the bands. Size 36 is made with KNIT-
KING Subita Crepe 2 x 3; Size 38 and Size 42 with
Regia.

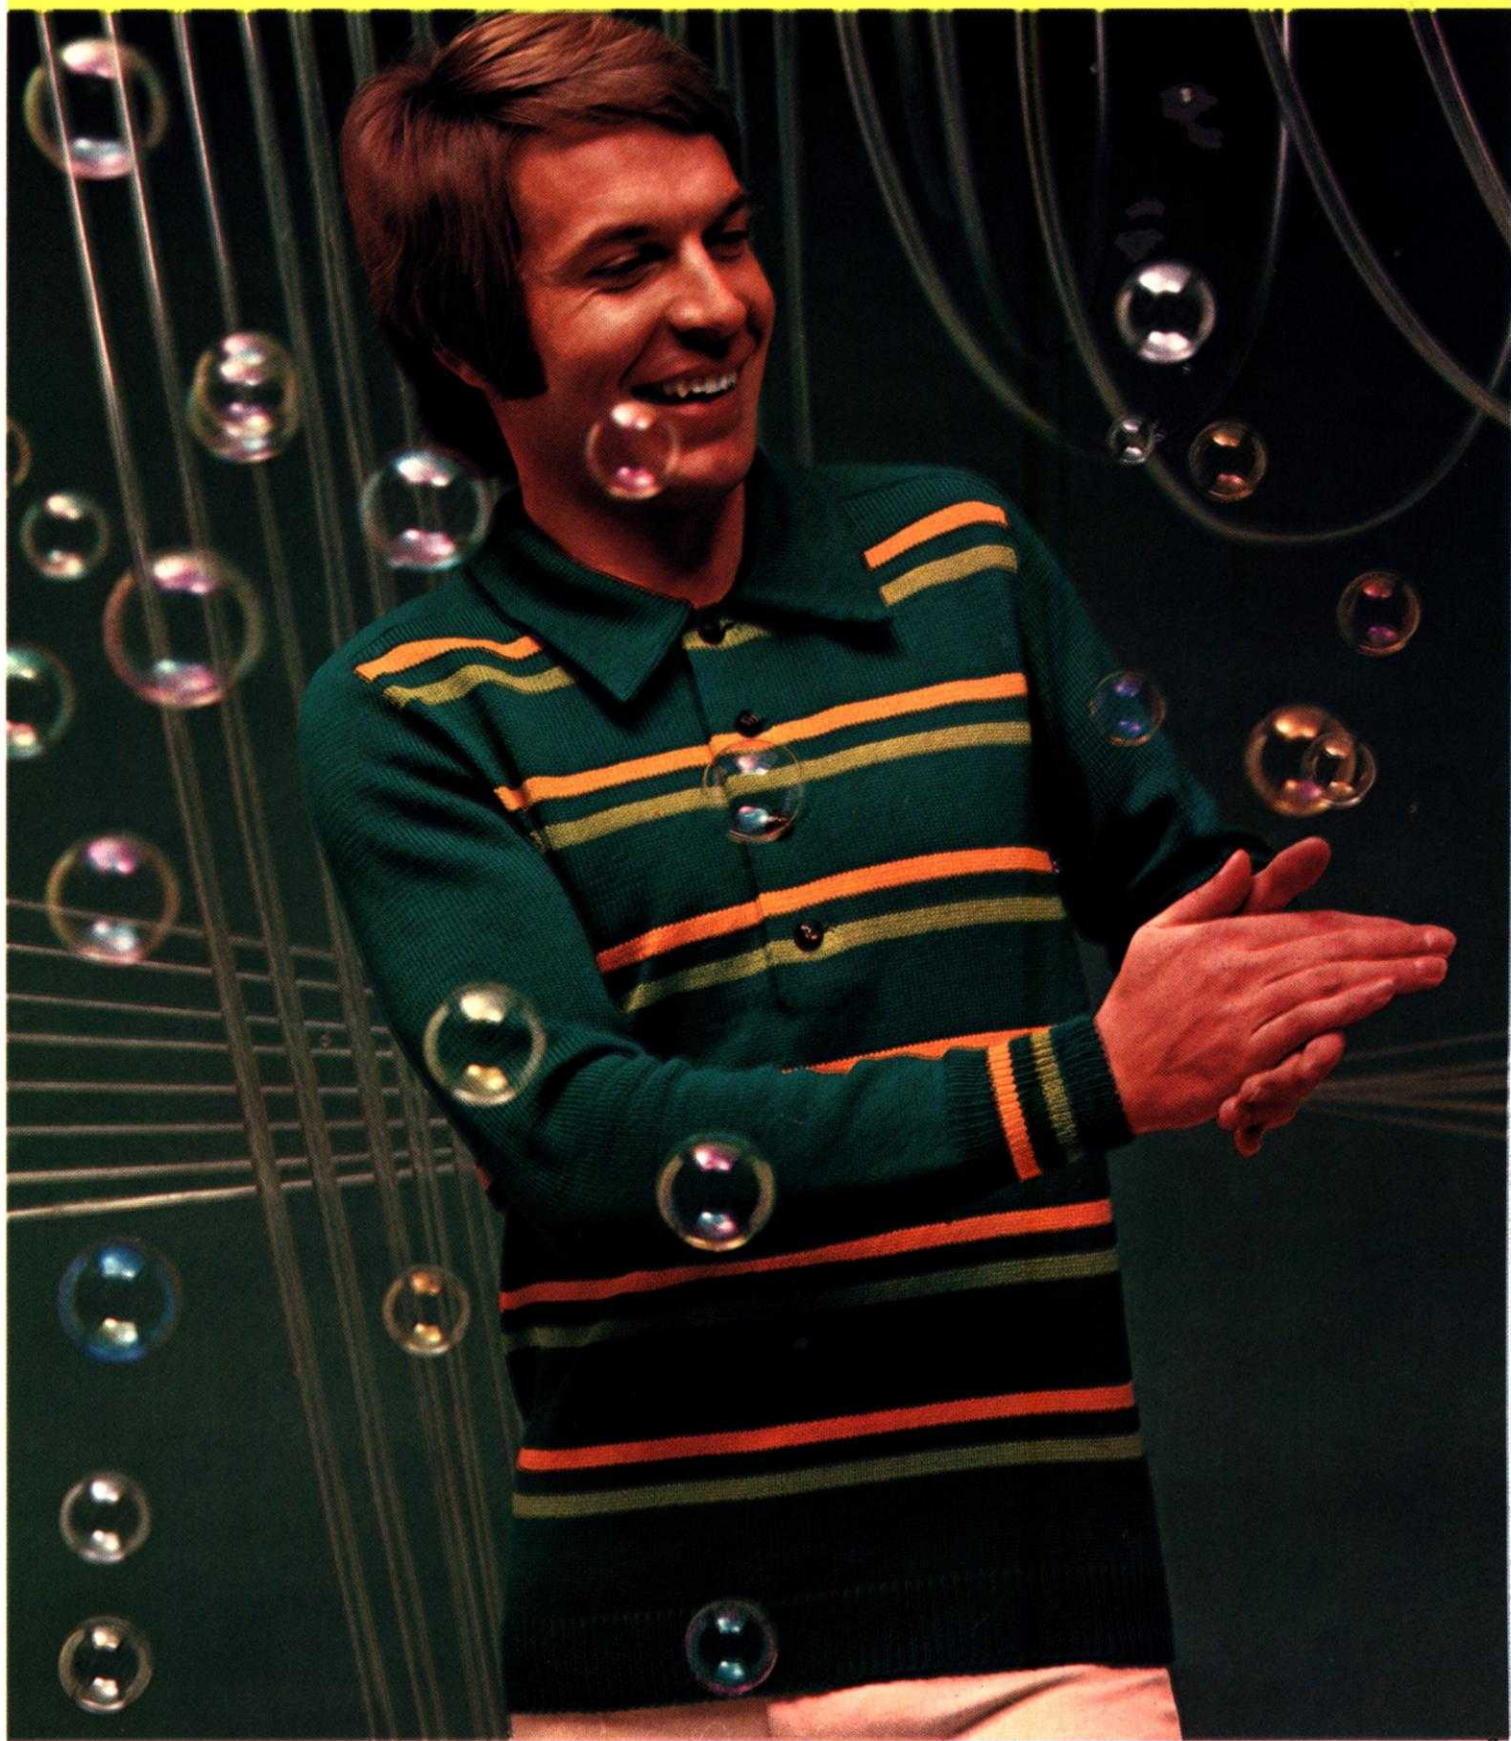



**The
outfit
for all**



Seasons



DK 8120 — A Norwegian Design with stripes to accent the waistline is used on the lower section of this lovely Dress . . . the bodice is stockinette stitch. Top it with a Ribbed Jacket . . . and wear it through all seasons. Size 10 is knitted with KNITKING Beatrice; Sizes 12 and 16 with Regia.

DK8123 — Midi-mad . . . a Skirt and a Blouse in the still popular midi length. The skirt is in stockinette stitch, the blouse in a lovely Holding Position Design. For a Size 10, use KNITKING Beatrice; Size 12 and Size 16, Amore.



The Midi is still in...

DK 8118 — Another lovely two-piece Midi length dress has a charming Eyelet Design border on the Skirt and on the Top. Knit Size 10 and Size 12 with KNITKING Amore.

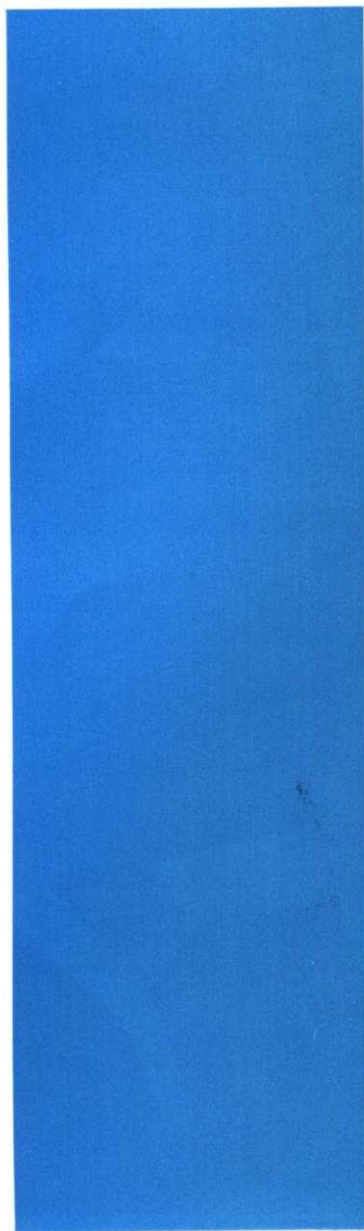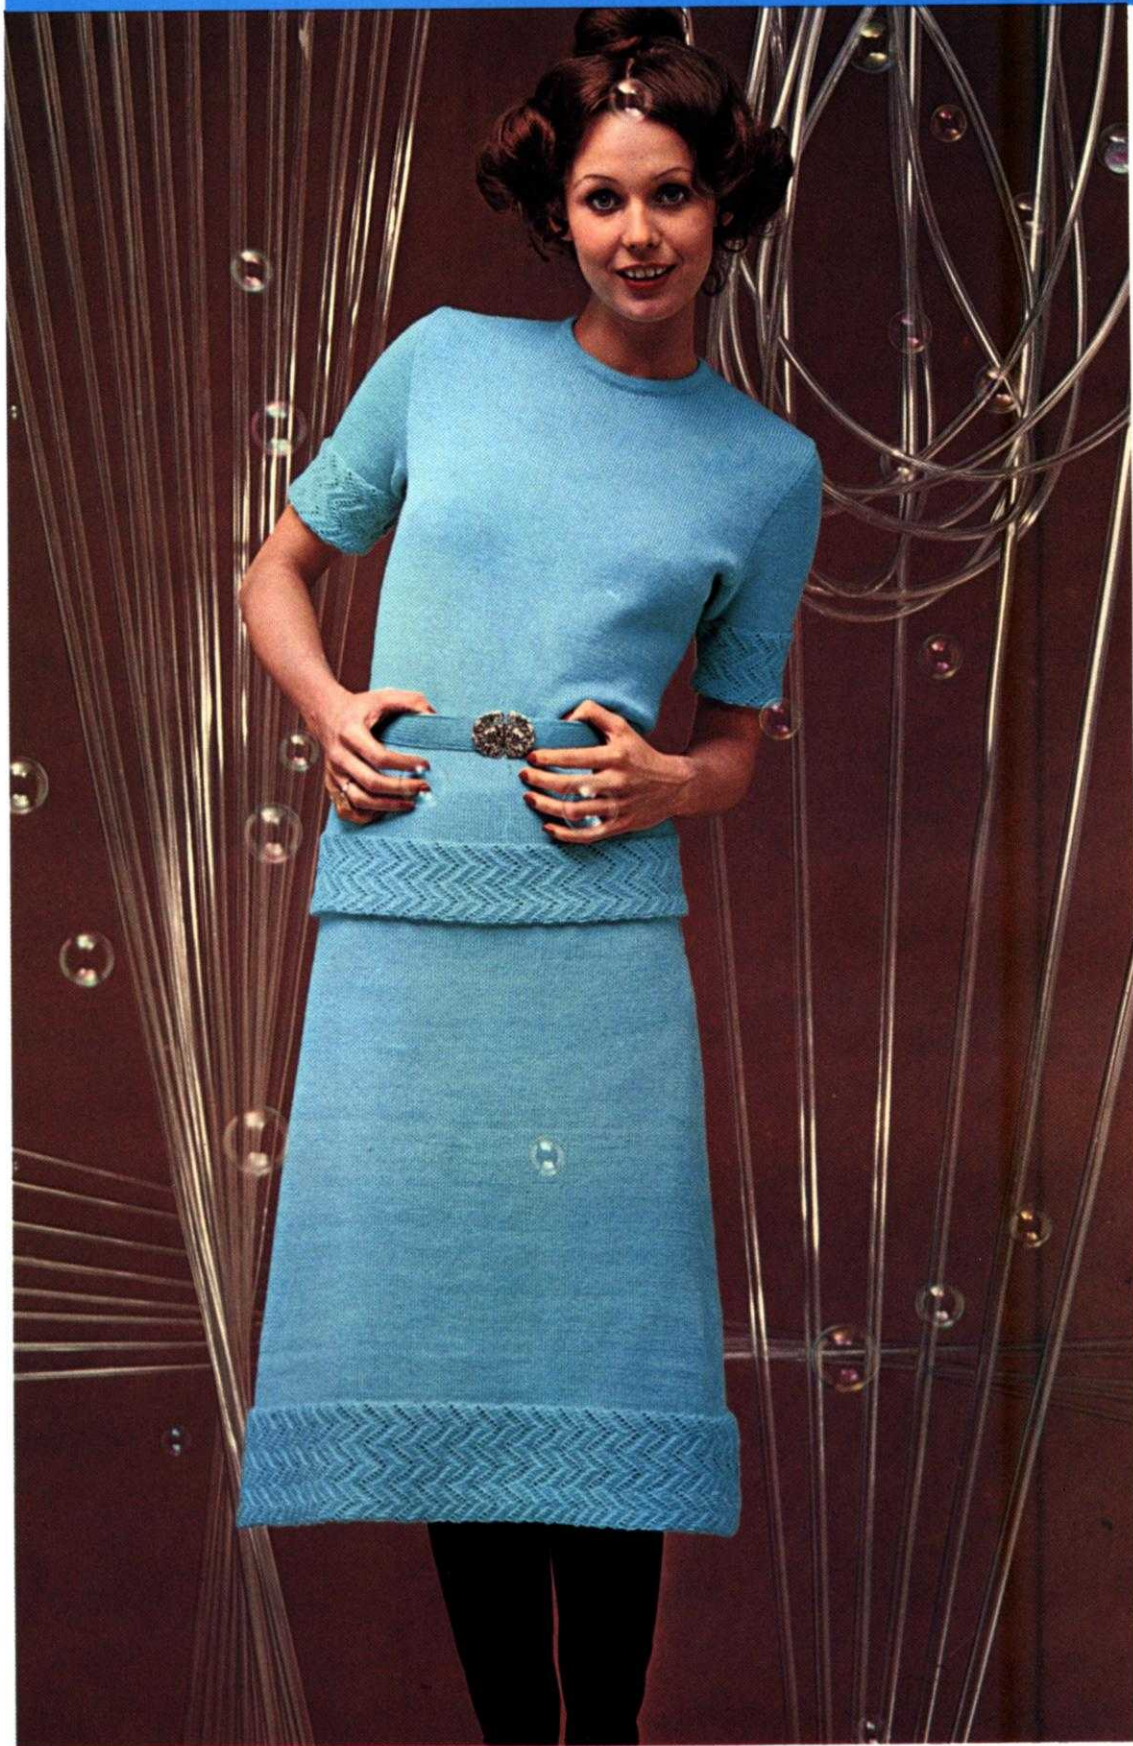

KK 5392 – Boys or Girls can wear a striped Pullover and a warm Jacket . . .
(be sure to change the buttonhole side if knitting the Jacket for a Girl).
Simple Stockinette stitch for both . . . with ribbed bands. The Jacket is worn
on the purl side. Size 10 and Size 12 . . . use KNITKING Flamingo Dralon.




**For
Boys
or
Girls**

DK 8126


SIZE:	14 (Bust 35"-36")	16 (Bust 38"-39")	20 (Bust 41"-42")
YARN:	Crocus Crepe	Amore	Amore
50 gr. BALLS:	15 Color 1 4 Color 2	13 Color 1 3 Color 2	14 Color 1 3 Color 2
TENSION:	5 to 7	7 to 9	8 to 10
GAUGE:	2" 16 sts. 23 rows	15 sts. 23 rows	14 sts. 21 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch with a contrast color center panel. CENTER BAND, BELT and Sleeve EDGES: K1, P1, Ribbing. DECREASES: Hang the 3rd st. onto the 2nd st. then move the end sts. inward to fill the empty needle. Begin the DARTS on the back section by hanging the sts. together as marked in the Diagram, then move the sts. together to fill the empty needles. The following decreases, then increases for the Darts lie directly above. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. To form the hem, hang the cast-on sts. back onto the machine behind the latches, then knit the following row with 1 to 2 tension settings higher. (If you prefer to sew the hem, omit forming the hem on the machine).


FINISHING: Block all sections. Sew the front band sections together, then sew the band to the center panel, leaving the left edge at upper front opening free. Weave the center panel to the side panels, 1 st. in from each edge. Join front and back section at sides and shoulders. Sew the sleeves together and set in. If you did not form the hem on the machine, turn under 18 rows on lower edge and hem to wrong side. Fold the lower edge of the sleeves 1 1/2" to the outside and hold in place with a button. (See picture). Fold the collar in half and sew the open side edges together. Sew 1 edge of collar to inside and 1 edge to outside of neckline. Work 1 row of single crochet around the front opening, then close the opening with a snap. Sew buttons to the center band and a buckle to the belt.




Cast on 195 sts. with color 1 and work 16 rows K1, P1, Ribbing, then bind off all sts.



Cast on 118 sts. with color 1 and work 16 rows K1, P1, Ribbing, then bind off all sts.

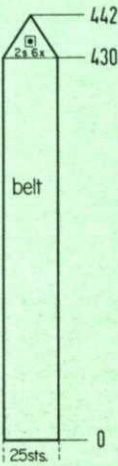

Cast on 25 sts. with color 1 and work K1, P1, Ribbing. After Row 430 work Short Rows. (Transfer the ribber sts. to the main machine before putting the needles in hold). ON OPPOSITE SIDE of CAM BOX put into holding position 2 needles after Rows 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441. After Row 442 bring all needles back into working position, then bind off all sts.

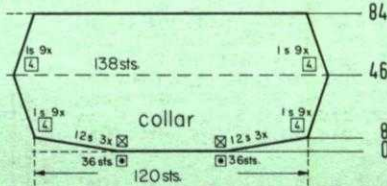

Work the second side section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).

ON OPPOSITE SIDE of CAM BOX (NECK SIDE) decrease 1 st. after Row 386, then again after Rows in (). ON CAM BOX SIDE, (ARMHOLE SIDE) bind off 3 sts. after Rows 404, (404), 406, 408; 2 sts. after Rows 410, 412, 414, 416; 1 st. after Rows 418, 420, 422, (422), 424. The Armhole Shaping is now completed. Continue to decrease 1 st. on NECK SIDE after Rows 440, 458, 474, 490. FOR SHOULDER bind off 3 sts. after Rows 496, 498, 500, 502, 504, 506.

ON OPPOSITE SIDE of CAM BOX increase 1 st. after Rows in (). ON CAM BOX SIDE increase 1 st. after Rows 312, (312), 322, (330), 332, 342, (348), 352, 362, (366), then knit to Row 367 and work Short Rows for the Bust Dart. ON OPPOSITE SIDE of CAM BOX put into holding position 4 needles after Rows 367, 369, 371, 373, 375, 377, 379, 381, 383. After Row 385 bring all needles back into working position, then knit to Row 386.

ON OPPOSITE SIDE of CAM BOX decrease 1 st. after Rows in (). ON CAM BOX SIDE decrease 1 st. after Rows 64, (64), 80, (86), 96, (108), 112, 128, (130), 144, (152), 160, 174, (174), 188, (194), 202, (214), 216, 224, 232, (234), 240, 248, (254), 256, 264, 270, (274), 276, 282, 288, 294, (294), then knit to Row 312.

ROWS 37 to 64: Knit even.

ROWS 0 to 36: Knit even, then form the hem.

Cast on 70 sts. with color 1 and work stockinette st.

Cast on 120 sts. with color 1, work stockinette st. and Short Rows. ON OPPOSITE SIDE of CAM BOX, put into holding position 36 needles after Rows 0, 1. ON OPPOSITE SIDE of CAM BOX bring back into working position 12 needles after Rows 2, 3, 4, 5, 6, 7. ON EACH SIDE, increase 1 st. after Rows 12, 16, 20, 24, 28, 32, 36, 40, 44. ON EACH SIDE, decrease 1 st. after Rows 48, 52, 56, 60, 64, 68, 72, 76, 80. After Row 84 bind off all sts.

Move the Cam Box to the left side, turn the Row Counter back to 482 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 482 (EVEN ROWS = SHOULDER SHAPING), 483 (ODD ROWS = NECK SHAPING), 484, 485; 4 sts. after Row 486; 3 sts. after Row 487; 4 sts. after Row 488; 2 sts. after Row 489; 4 sts. after Row 490; 2 sts. after Row 491; 4 sts. after Row 492; 2 sts. after Row 493; 4 sts. after Rows 494, 496.

ON CAM BOX SIDE, bind off 3 sts. after Rows 478, 479, 480, 481, then knit to Row 482, bind off the center 12 sts., put the needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 3 sts. after Rows 386, 387, 388, 389, 390, 391; 2 sts. after Rows 392, 393, 394, 395, 396, 397, 398, 399; 1 st. after Rows 400, 401, 402, 403, 404, 405, 406, 407, then knit to Row 478.



Increase 2 sts. for EACH DART after Rows in (). ON EACH SIDE, increase 1 st. after Rows 312, (312), 322, (330), 332, 342, (348), 352, 362, (366), then knit to Row 386.

Decrease 2 sts. for EACH DART after Rows in (). ON EACH SIDE, decrease 1 st. after Rows 64, 80, 96, 112, 128, 144, 160, 174, 188, 202, 216, 224, 232, 240, (240), 248, 256, (258), 264, 270, 276, (276), 282, 288, 294, (294), then knit to Row 312.

ROWS 37 to 64: Knit even.

ROWS 0 to 36: Knit even, then form the hem.

Cast on 188 sts. with color 1 and work stockinette st.

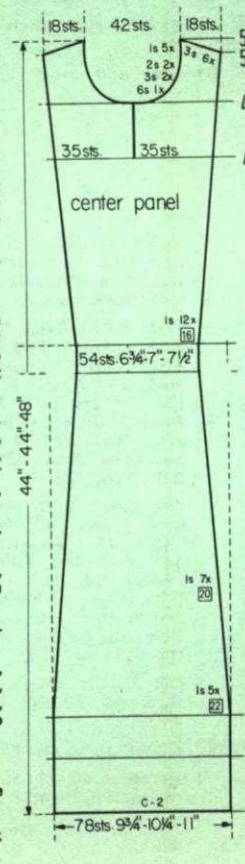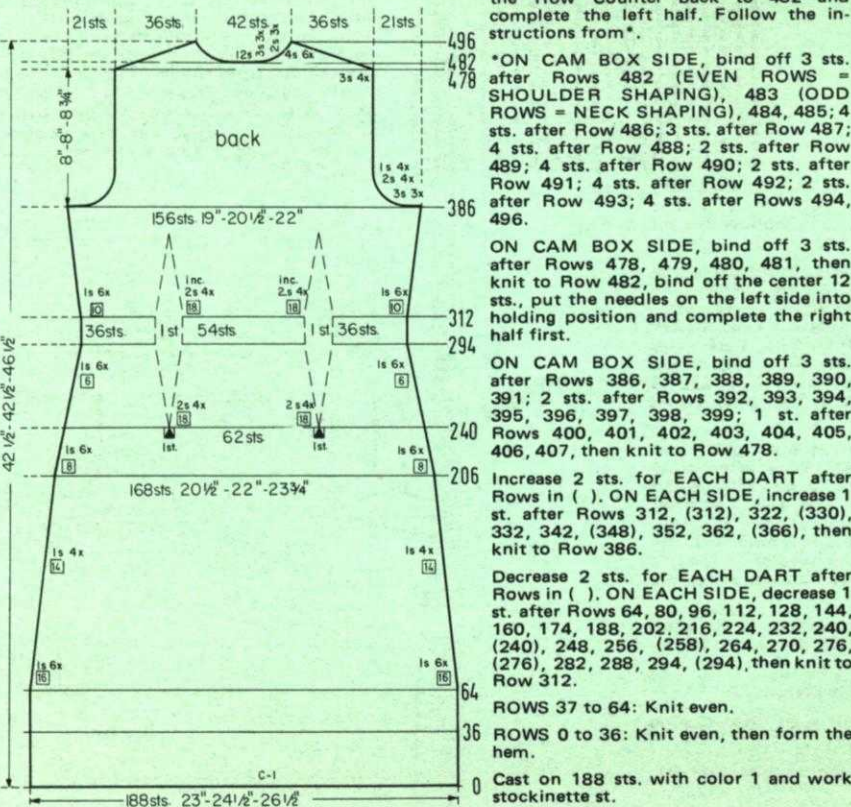

Move the Cam Box to the left side, turn the Row Counter back to 436 and complete the left half. Follow the instructions from*.

Continue to increase 1 st. ON CAM BOX SIDE after Rows 440, 456, 472, then 1 more time after Row in (). Knit to Row 475. ON CAM BOX SIDE, bind off 6 sts. after Row 475; 3 sts. after Rows 477, 479; 2 sts. after Rows 481, 483; 1 st. after Rows 485, 487, (488), 489, 491, 493. For SHOULDER bind off 3 sts. after Rows 506, 508, 510, 512, 514, 516.

*ROWS 437 to 440: Knit even.

ON EACH SIDE, increase 1 st. after Rows 312, 328, 344, 360, 376, 392, 408, 424, then knit to Row 436, put 35 needles on the left side into holding position and complete the right half first.


ON EACH SIDE, decrease 1 st. after Rows 64, 86, 108, 130, 152, 174, 194, 214, 234, 254, 274, 294, then knit to Row 312.

ROWS 37 to 64: Knit even.

ROWS 0 to 36: Knit even, then form the hem.

Cast on 78 sts. with color 2 and work stockinette st.

Continued on next page

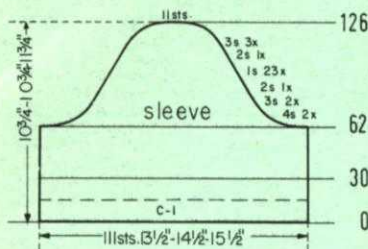

ON CAM BOX SIDE, bind off 4 sts. after Rows 62, 63, 64, 65; 3 sts. after Rows 66, 67, 68, 69; 2 sts. after Rows 70, 71. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116. ON CAM BOX SIDE, bind off 2 sts. after Rows 118, 119; 3 sts. after Rows 120, 121, 122, 123, 124, 125; 11 sts. after Row 126.

ROWS 31 to 62: Knit even.

ROWS 0 to 30: Knit even, then change to stockinette st.


Cast on 111 sts. with color 1 and work K1, P1, Ribbing.

DP 8114

SIZE:	10 (Bust 32 1/2"-33 1/2")	14 (Bust 36"-37")	16 (Bust 38"-39")
YARN:	Crocus Crepe	Sport Prima	Sport Prima
50 gr. BALLS:	9	10	11
TENSION:	6 to 8	7 to 9	8 to 10
GAUGE:	2" 16 sts. 21 rows	15 sts. 20 rows	14 sts. 19 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch. Cable Stripes according to the Line Drawing on the FRONT Section. EDGES: K1, P1, Ribbing. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle.

FINISHING: Block all sections. Join front and back section at sides and shoulders. Sew the sleeves together and set in. Join the short ends of the collar, then sew the collar to neckline and fold over to outside.

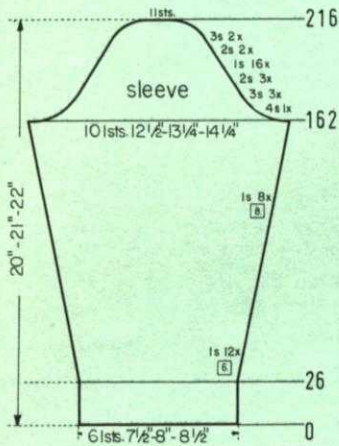


ON CAM BOX SIDE, bind off 4 sts. after Rows 162, 163; 3 sts. after Rows 164, 165, 166, 167, 168, 168; 2 sts. after Rows 170, 171, 172, 173, 174, 175. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206. ON CAM BOX SIDE, bind off 2 sts. after Rows 208, 209, 210, 211; 3 sts. after Rows 212, 213, 214, 215; 11 sts. after Row 216.


ON EACH SIDE, increase 1 st. after Rows 26, 32, 38, 44, 50, 56, 62, 68, 74, 80, 86, 92, 98, 106, 114, 122, 130, 138, 146, 154, then knit to Row 162.

ROWS 0 to 26: Knit even, then change to stockinette st.

Cast on 61 sts. and work K1, P1, Ribbing.



Cast on 147 sts. and work 44 rows K1, P1, Ribbing, then bind off all sts.

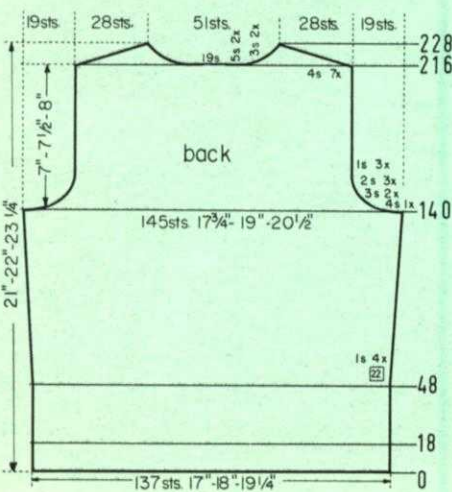

Move the Cam Box to the left side, turn the Row Counter back to 216 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Row 216 (EVEN ROWS = SHOULDER SHAPING); 5 sts. after Row 217 (ODD ROWS = NECK SHAPING); 4 sts. after Row 218; 5 sts. after Row 219; 4 sts. after Row 220; 3 sts. after Row 221; 4 sts. after Row 222; 3 sts. after Row 223; 4 sts. after Rows 224, 226, 228.



ON CAM BOX SIDE, bind off 4 sts. after Rows 140, 141; 3 sts. after Rows 142, 143, 144, 145; 2 sts. after Rows 146, 147, 148, 149, 150, 151; 1 st. after Rows 152, 153, 154, 155, 156, 157, then knit to Row 216, bind off the center 19 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 48, 70, 92, 114, then knit to Row 140.


ROWS 19 to 48: Knit even.

ROWS 0 to 18: Knit even, then change to stockinette st.

Cast on 137 sts. and work K1, P1, Ribbing.

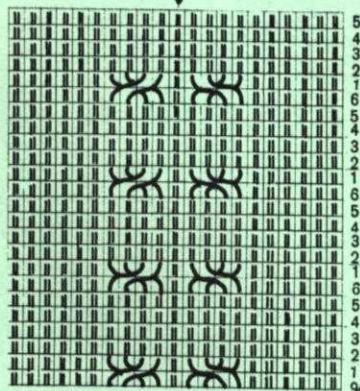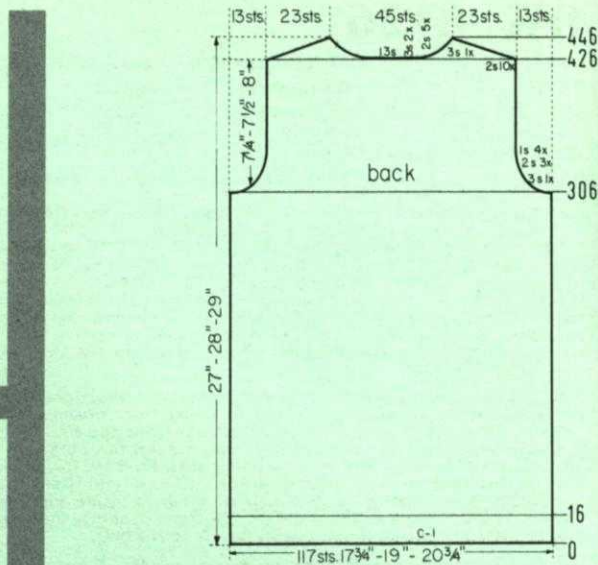

Begin the Cable Design by crossing 4 sts. on each side of the center st. as shown. Use 2 double transfer tools. Place the 4 sts. from the right side of the center st. onto the 2 tools. Now place the 2 sts. from the left tool onto the needles that were occupied by the sts. on the right tool, then place the 2 sts. from the right tool onto the 2 empty needles. On the left side of the center st. place the 4 sts. onto the 2 tools, then place the 2 sts. from the right tool onto the needles that were occupied by the sts. on the left tool and the sts. from the left tool onto the 2 empty needles. Repeat after every 6 rows. After 24 rows, begin a new Cable Stripe ON EACH SIDE, then knit 24 rows and again begin a new Cable Stripe ON EACH SIDE.

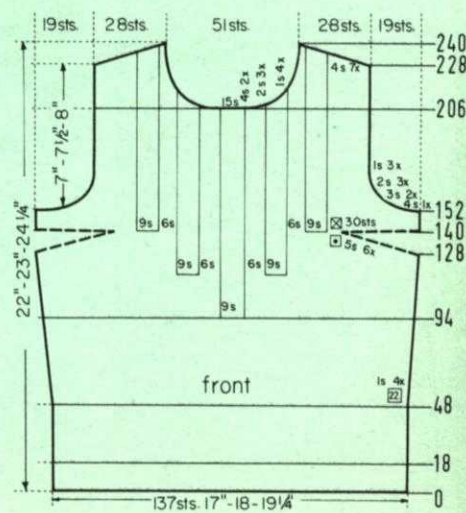

DP 8108

SIZE:	10 (Bust 32½"-33½")	14 (Bust 35"-36")	16 (Bust 38"-39")
YARN:	Allegro Dralon	Allegro Dralon	Mohana
50 gr. BALLS:	9 Color 1 2 Color 2 1 Color 3 1 Color 4	9 Color 1 2 Color 2 1 Color 3 1 Color 4	13 Color 1 3 Color 2 1 Color 3 1 Color 4
TENSION:	Stock & Pattern 2 Pattern 1	6 to 8 8 to 9	7 to 9 9 to 10
GUAGE:	2" Stk. & Pattern 2 Pattern 1	14 sts. 20 rows 13 sts. 33 rows	13 sts. 19 rows 12 sts. 32 rows
			8 to 10 9 to 10 12 sts. 18 rows 11 sts. 31 rows

Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 426 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 2 sts. after Row 426 (EVEN ROWS = SHOULDER SHAPING); 3 sts. after Row 427 (ODD ROWS = NECK SHAPING); 2 sts. after Row 428; 3 sts. after Row 429; 2 sts. after Rows 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 442, 444; 3 sts. after Row 446.


ON CAM BOX SIDE, bind off 3 sts. after Rows 306, 307; 2 sts. after Rows 308, 309, 310, 311, 312, 313; 1 st. after Rows 314, 315, 316, 317, 318, 319, 320, 321, then knit to Row 426, bind off the center 13 sts., put the needles on the left side into holding position and complete the right half first. (For the Front Section knit to ROW 380).

ROWS 17 to 306: Knit even.

ROWS 0 to 16: Knit even, then begin the Holding Position Design. Set up the pattern manually, knit 1 row, then use the needle shifter to change the position of the needles after every row knitted.

Cast on 117 sts. with color 1 and work stockinette st.

See line Drawing II on page 12

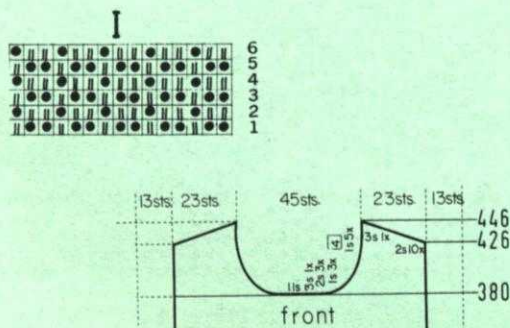

The instructions are the same for all sizes. PATTERN: Front and Back Section: Holding Position Design according to Line Drawing No. 1, worn on the knit side. Set up the pattern manually, then change the position of the needles with the needle shifter. Sleeve: Stockinette Stitch and a Norwegian Design according to Line Drawing No. 2, or use JAC 40 and Pattern No. 459. Each row in the Norwegian Design is counted as 1 row in the Gauge and Instructions, but several movement of the Cam Box are needed to complete 1 row. Sleeve EDGES and COLLAR: K1, P1, Ribbing. CAP: Stockinette Stitch, Holding Position Design and Norwegian Design. INCREASES: Place the end st. from the row below onto the next empty needle.

FINISHING: Block all sections. PULLOVER: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Turn under 16 rows on lower edge and hem to wrong side. Join short ends of collar, then sew the collar to neckline and fold over to outside. CAP: Weave the section together at center back, 1 st. in from each edge. Turn under 26 rows on lower edge and hem to wrong side. Pull the sts. held on yarn together, then sew the ends in.

Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 380 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Row 381; 2 sts. after Rows 383, 385, 387; 1 st. after Rows 389, 391, 393, 395, 399, 403, 407, 411. For SHOULDER bind off 2 sts. after Rows 426, 428, 430, 432, 434, 436, 438, 440, 442, 444; 3 sts. after Row 446.

Work the front section the same as the back section to ROW 380, then bind off the center 11 sts., put the needles on the left side into holding position and complete the right half first.



Move the Cam Box to the left side, turn the Row Counter back to 206 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Rows 207, 209; 2 sts. after Rows 211, 213, 215; 1 st. after Rows 217, 219, 221, 223. For SHOULDER bind off 4 sts. after Rows 228, 230, 232, 234, 236, 238, 240.



ON CAM BOX SIDE, bind off 4 sts. after Rows 152, 153; 3 sts. after Rows 154, 155, 156, 157; 2 sts. after Rows 158, 159, 160, 161, 162, 163; 1 st. after Rows 164, 165, 166, 167, 168, 169, then knit to Row 206, bind off the center 15 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 48, 70, 92, then knit to Row 94 and begin the first Cable Stripe. ON EACH SIDE, increase 1 st. after Row 114, begin the 2nd Cable Stripes after Row 118, then knit to Row 128 and work Short Rows for the Darts. ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139. ON OPPOSITE SIDE of CAM BOX bring back into working position all needles after Rows 140, 141. Begin the third Cable Stripes after Row 142, then knit to Row 152.

ROWS 19 to 48: Knit even.

ROWS 0 to 18: Knit even, then change to stockinette st.

Cast on 137 sts. and work K1, P1, Ribbing.

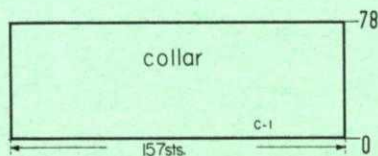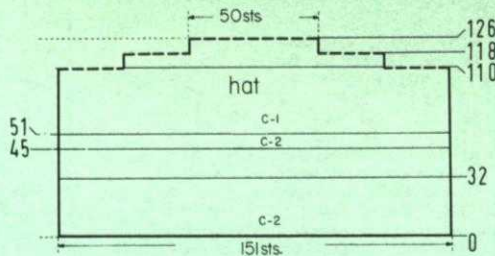

Cast on 157 sts. with color 1 and work 78 rows K1, P1, Ribbing, then bind off all sts.

Cast on 151 sts. with color 2 and work stockinette st. to Row 32, then, beginning with ROW 7 of the Line Drawing or JAC 40 card work 13 rows of the Norwegian Design. After Row 45 change to color 2 and work 6 rows stockinette st. After Row 51 change to color 1 and work the Holding Position Design. After Row 110 change to stockinette st. and knit 1 row. Now knit several rows with contrast waste yarn, then remove the knitting from the machine. Decrease 50 sts. by hanging the CAP sts. back onto the machine as follows: First needle 1 st., second needle 2 sts., third needle 1 st., fourth needle 2 sts., etc. Remove the waste yarn and knit to Row 126. Remove the sts. from the machine by transferring first the 1st, 3rd, 5th etc. sts. onto a length of yarn, then the 2nd, 4th, 6th sts. onto a second length of yarn. (Use the ribber transfer needle to thread the sts. onto the yarn.)


Continued on pages 12 & 13

DP 8119

SIZE:	8 (Bust 31"-32")	10 (Bust 33"-34")	14 (Bust 35"-36")
YARN:	Beatrice	Crocus Crepe	Mohana
50 gr. BALLS:	7	9	10
TENSION:	5 to 7	7 to 9	6 to 8
GAUGE:	2" 16 sts. 22 rows	15 sts. 21 rows	14 sts. 21 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch. EDGES: K1, P1, Ribbing. DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections. Join front and back section at sides. Sew the sleeves together, then weave the sleeves to front and back section, 1 st. in from each edge. Sew 1 edge of front and neckband to inside and 1 edge to outside of front edges and neckline, leaving 4 spaces on the right front edge for buttonholes. Begin the first obuttonhole about 1/4" from the lower edge of the opening. Each buttonhole is 3/4" long and about 1 1/4" apart. (See picture). Finish the buttonholes, sew on buttons.

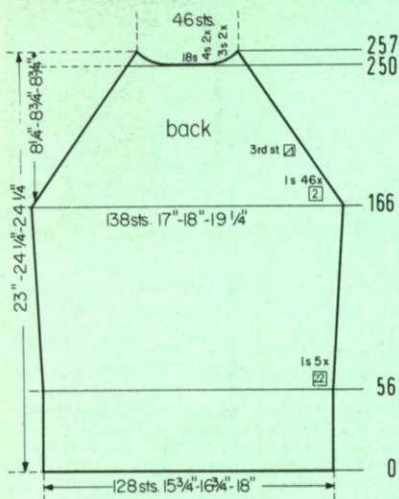

Move the Cam Box to the left side, turn the Row Counter back to 250 and complete the left half. Follow the instructions from*.


*ON CAM BOX SIDE, decrease 1 st. after Row 250 (EVEN ROWS = RAGLAN SHAPING); 4 sts. after Row 251 (ODD ROWS = NECK SHAPING); 1 st. after Row 252; 4 sts. after Row 253; 1 st. after Row 254; 3 sts. after Row 255; 1 st. after Row 256; 3 sts. after Row 257.

ON EACH SIDE, decrease 1 st. after Rows 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, then knit to Row 250, bind off the center 18 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 56, 78, 100, 122, 144, then knit to Row 166. (For the FRONT Section knit to ROW 148).

ROWS 0 to 56: Knit even, then change to stockinette st.

Cast on 128 sts. and work K1, P1, Ribbing.

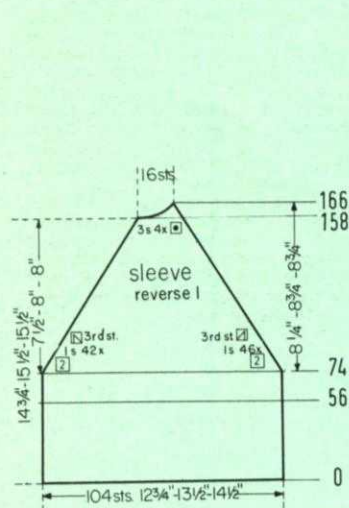


Work the second sleeve with reverse shaping, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).

ON EACH SIDE, decrease 1 st. after Rows 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, then knit to Row 158, and work Short Rows and continue to decrease 1 st. ON CAM BOX SIDE after Rows in (). ON OPPOSITE SIDE of CAM BOX put into holding position 3 needles after Rows 158, (158), 160, (160), 162, (162), 164, (164). After Row 166 bring all needles back into working position, then bind off the remaining 16 sts.

ROWS 57 to 74: Knit even.

ROWS 0 to 56: Knit even, then change to stockinette st.

Cast on 104 sts. and work K1, P1, Ribbing.

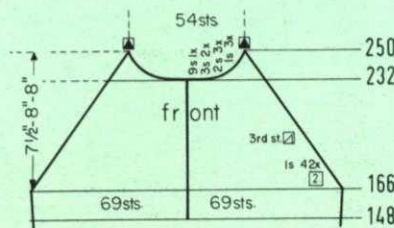


Move the Cam Box to the left side, turn the Row Counter back to 148 and complete the left half. Follow the instructions from*.


ON CAM BOX SIDE, decrease 1 st. after Rows 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232; 9 sts. after Row 233 (ODD ROWS = NECK SHAPING); 1 st. after Row 234; 3 sts. after Row 235; 1 st. after Row 236; 3 sts. after Row 237; 1 st. after Row 238; 2 sts. after Row 239; 1 st. after Row 240; 2 sts. after Row 241; 1 st. after Row 242; 2 sts. after Row 243; 1 st. after Row 244, 245, 246, 247, 248, 249. After Row 250 hang the remaining 3 sts. together (the 2 outside sts. onto the center st.), then bind off.

*ROWS 149 to 166: Knit even.



Work the front section the same as the back section to ROW 148, then put 69 sts. on the left side into holding position and complete the right half first.

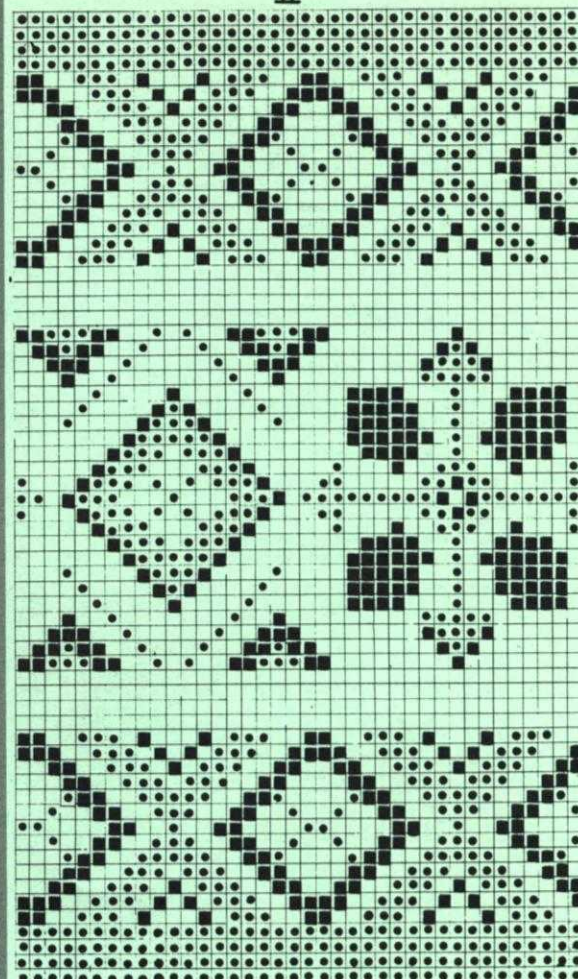

JAC 40
 ■ = Color 4 U
 □ = Color 3 A
 ● = Color 2 E



Cast on 8 sts. and work 360 rows stockinette st., then bind off all sts.

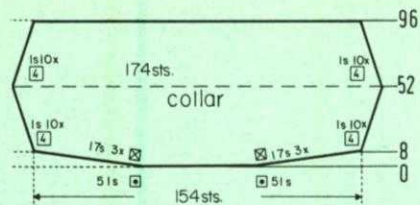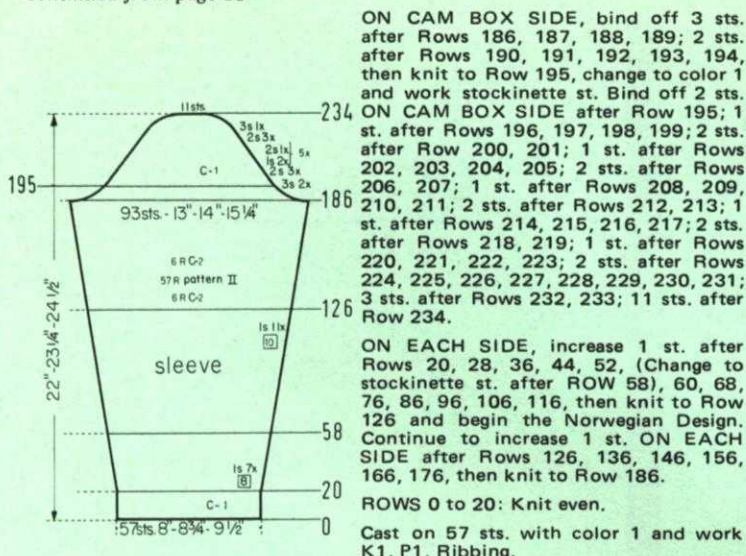

Cast on 154 sts. with color 1, work stockinette st. and Short Rows. ON OPPOSITE SIDE of CAM BOX put into holding position 51 needles after Rows 0, 1. ON OPPOSITE SIDE of CAM BOX bring back into working position 17 needles after Rows 2, 3, 4, 5, 6, 7. ON EACH SIDE, increase 1 st. after Rows 12, 16, 20, 24, 28, 32, 36, 40, 44, 48. ON EACH SIDE, decrease 1 st. after Rows 56, 60, 64, 68, 72, 76, 80, 84, 88, 92. After Row 96 bind off all 154 sts.

Hang the sts. from the stitch holder back onto the machine, cast on 28 sts. on the left side of these sts. With the Cam Box on the RIGHT side and Row Counter at 176 complete the right half. Follow the instructions from *.

ON CAM BOX SIDE, bind off 28 sts. after Row 287 (ODD ROWS = NECK SHAPING); 3 sts. after Rows 289, 291; 2 sts. after Rows 293, 295; 3 sts. after Row 296 (EVEN ROWS = SHOULDER SHAPING); 2 sts. after Row 297; 3 sts. after Row 298; 1 st. after Row 299; 3 sts. after Row 300; 1 st. after Row 301; 4 sts. after Row 302; 1 st. after Row 303; 4 sts. after Row 304; 1 st. after Row 305; 4 sts. after Rows 306, 308, 310, 312, 314, 316.

Make buttonholes after Row in () over the same sts. as before. ON CAM BOX SIDE, bind off 4 sts. after Row 220; (221), 3 sts. after Rows 222, 224; 2 sts. after Rows 226, 228; 1 st. after Rows 230, 232, 234. The Armhole Shaping is now completed. Continue to make buttonholes after Rows 250, 279, then knit to Row 287.

Make buttonholes after Row 192 over the 3rd-8th and 21st-26th sts. counting from the right side. Increase 1 st. ON CAM BOX SIDE after Row 196, then knit to Row 220.

* ROWS 177 to 192: Knit even.

ON EACH SIDE, increase 1 st. after Rows 100, 124, 148, 172, then knit to Row 176, put 74 sts. on the RIGHT side onto a stitch holder, cast on 14 sts. on the right side of the 88 sts. left on the machine and working over 102 sts. complete the left half first.

ROWS 29 to 100: Knit even.

ROWS 0 to 28: Knit even, then change to stockinette st. and work the repeated Color Stripes as marked in the Diagram.



From right to left, cast on 154 sts. with color 1 and work K1, P1, Ribbing. (Cam Box will be on the LEFT side at Row 0).

HP 3684

SIZE:	36 (Chest 35"-36")	38 (Chest 37"-38")	42 (Chest 41"-42")
YARN:	Subita Crepe 2 x 3	Regia	Regia
50 gr. BALLS:	8 Color 1 1 Color 2 1 Color 3	9 Color 1 1 Color 2 1 Color 3	10 Color 1 1 Color 2 1 Color 3
TENSION:	4 to 6	4 to 6	5 to 7
GAUGE:	2" 17 sts. 24 rows	16 sts. 23 rows	15 sts. 22 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch with repeated Color Stripes as marked in the Diagrams. EDGES: K1, P1, Ribbing. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections. Join front and back section at sides. Sew the sleeves together, then sew the sleeves to armhole edges and shoulders. Turn under 14 sts. on each front edge and hem to wrong side. Fold the collar in half and sew the open side edges together. Sew 1 edge of the collar to inside and 1 edge to outside of neckline, leaving about 1/4" on each front edge free. Finish the buttonholes, sew on buttons.

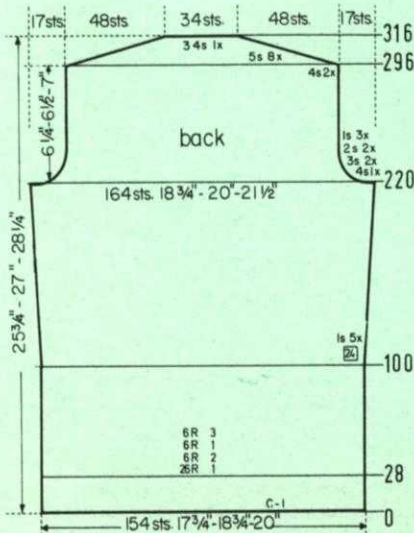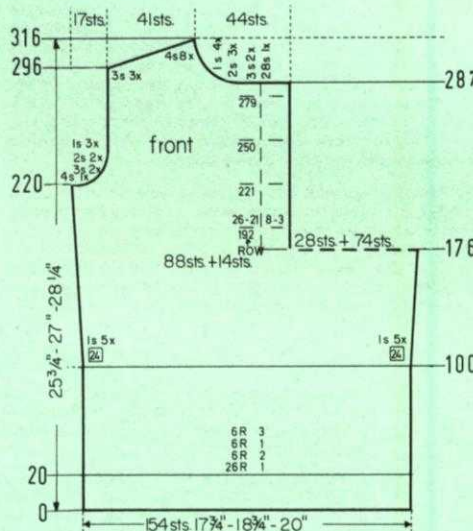

ON CAM BOX SIDE, bind off 4 sts. after Rows 296, 297, 298, 299; 5 sts. after Rows 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315. After Rows 316 bind off the remaining 34 sts. (NECK sts.)

ON CAM BOX SIDE, bind off 4 sts. after Rows 220, 221; 3 sts. after Rows 222, 223, 224, 225; 2 sts. after Rows 226, 227, 228, 229; 1 st. after Rows 230, 231, 232, 233, 234, 235, then knit to Row 296.


ON EACH SIDE, increase 1 st. after Rows 100, 124, 148, 172, 196, then knit to Row 220.

ROWS 29 to 100: Knit even.

ROWS 0 to 28: Knit even, then change to stockinette st. and work the repeated Color Stripes as marked in the Diagram.

Cast on 154 sts. with color 1 and work K1, P1, Ribbing.

(Continued on next page)

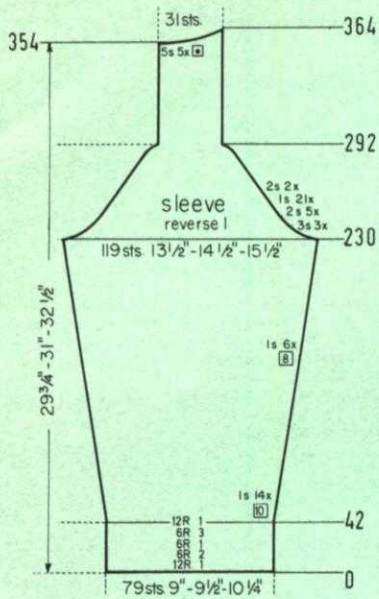


Work the second sleeve with reverse shaping, casting on from right to left. (Cam Box will will on the LEFT side at Row 0).

ON CAM BOX SIDE, bind off 3 sts. after Rows 230, 231, 232, 233, 234, 235; 2 sts. after Rows 236, 237, 238, 239, 240, 241, 242, 243, 244, 245. ON EACH SIDE, decrease 1 st. after Rows 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286. ON CAM BOX SIDE, bind off 2 sts. after Rows 288, 289, 290, 291, then knit to Row 354 and work Short Rows. ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 354, 356, 358, 360, 362. After Row 364 bring all needles back into working position, then bind off all 31 sts.

ON EACH SIDE, increase 1 st. after Rows 42, 52, 62, 72, 82, 92, 102, 112, 122, 132, 142, 152, 162, 172, 182, 190, 198, 206, 214, 222, then knit to Row 230.

ROWS 0 to 42: Knit even, then change to stockinette st. and continue working with color 1.

Cast on 79 sts. with color 1, work K1, P1, Ribbing and the Color Stripes as marked in the Diagram.

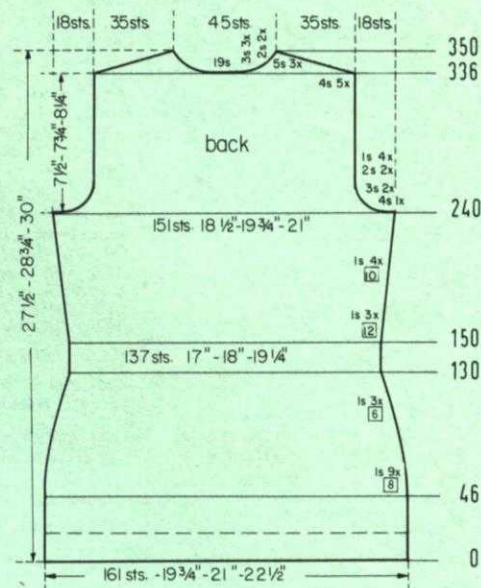


DK 8120

SIZE:	10 (Bust 32"-33")	12 (Bust 34"-35")	16 (Bust 37"-38")
YARN:	Beatrice	Regia	Regia
50 gr. BALLS:			
Dress:	8 Color 1 4 Color 2	8 Color 1 4 Color 2	9 Color 1 5 Color 2
Jacket:	9 Color 2	8 Color 2	9 Color 2
TENSION:	3 to 5	4 to 6	5 to 7
GUAGE:	2" Stk. 17 sts. 24 rows Pattern 1 17 sts. 23 rows Pattern 2 16 sts. 25 rows	16 sts. 23 rows 16 sts. 22 rows 15 sts. 24 rows	15 sts. 22 rows 15 sts. 21 rows 14 sts. 23 rows

The instructions are the same for all sizes. PATTERN: DRESS: Skirt Section: Norwegian Design according to Line Drawing 1, using the adjustable needle selector. Bodice: Stockinette Stitch and Color Stripes as marked in the Diagram. JACKET: Knit 1, Purl 5, Ribbing according to Line Drawing 2, worn on the knit side. Each row in the Norwegian Design is counted as 1 row in the Gauge and Instructions, but several movements of the Cam Box are needed to complete 1 row. DECREASES: Hang the end st. onto the next occupied needle. INCREASES: Place the end st. from the row below onto the next empty needle. JACKET FRONT SHAPING: Hang the 3rd st. on NECK SIDE onto the 2nd st., then move the end sts. inward to fill the empty needle. Transfer the appropriate ribber st. to the main machine before putting the needles in holding position when working the ribbed pattern.

FINISHING: Block all sections. DRESS: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Turn under 20 rows on lower edge and hem to wrong side. Sew the neckband to neckline. Work 1 row of single crochet around the back opening, then work 4 loops on 1 side and sew 4 buttons to other side of the opening. JACKET: Join back and front sections at sides and shoulders. Sew the sleeves together and set in. Turn under 20 rows on lower edge and hem to wrong side. Sew 1 edge of the band to inside and 1 edge to outside of neckline and front edges. Finish the buttonholes, sew on buttons.


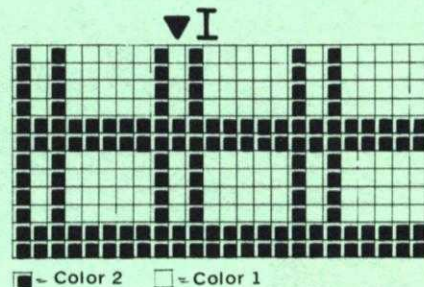


Move the Cam Box to the left side, turn the Row Counter back to 468 and complete the left half. Follow the instructions from*.

* ON CAM BOX SIDE, bind off 3 sts. after Rows 469, 471; 2 sts. after Rows 473, 475, 477, 479; 1 st. after Rows 481, 483, 485, 487, 489. For SHOULDER bind off 4 sts. after Rows 492, 494, 496, 498, 500, 502; 5 sts. after Rows 504, 506.

ON CAM BOX SIDE, bind off 4 sts. after Rows 406, 407; 2 sts. after Rows 408, 409, 410, 411, 412, 413, 414, 415; 1 st. after Rows 416, 417, 418, 419, 420, 421, 422, 423, then knit to Row 468, bind off the center 13 sts., put the needles on the left side into holding position and complete the right half first.

Work the front section the same as the back section to ROW 376, then work Short Rows for the Darts. ON OPPOSITE SIDE of CAM BOX put into holding position 7 needles after Rows 376, 377, 378, 379, 380, 381, 382, 383, 384, 385. ON OPPOSITE SIDE of CAM BOX bring all needles back into working position after Rows 386, 387, then knit to Row 406.

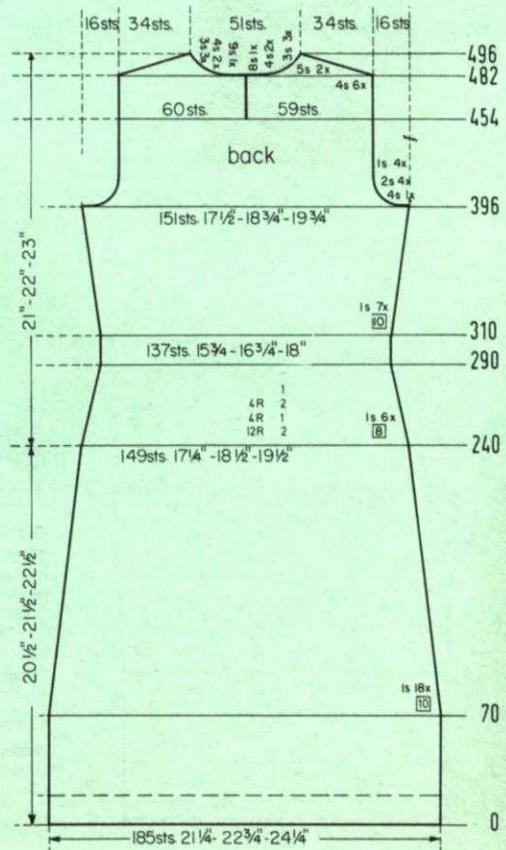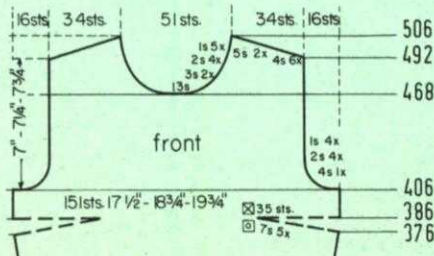

Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 336 and complete the left half. Follow the instructions from*.

* ON CAM BOX SIDE, bind off 4 sts. after Row 336 (EVEN ROWS = SHOULDER SHAPING); 3 sts. after Row 337 (ODD ROWS = NECK SHAPING); 4 sts. after Row 338; 3 sts. after Row 339; 4 sts. after Row 340; 3 sts. after Row 341; 4 sts. after Row 342; 2 sts. after Row 343; 4 sts. after Row 344; 2 sts. after Row 345; 5 sts. after Rows 346, 348, 350.


ON CAM BOX SIDE, bind off 4 sts. after Rows 240, 241; 3 sts. after Rows 242, 243, 244, 245; 2 sts. after Rows 246, 247, 248, 249; 1 st. after Rows 250, 251, 252, 253, 254, 255, 256, 257, then knit to Row 336, bind off the center 19 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 150, 162, 174, 186, 196, 206, 216, then knit to Row 240.

ON EACH SIDE, decrease 1 st. after Rows 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 124, 130, then knit to Row 150.

ROWS 0 to 46: Knit even.

Cast on 161 sts. and work the Ribbed Pattern.



Cast on 19 sts., work stockinette st. and make buttonholes after Rows 20, 68, 116, 164, 212 over the 2nd-6th and 14th-18th sts. counting from the left side, then knit to Row 720 and bind off all sts.



Move the Cam Box to the left side, turn the Row Counter back to 454 and complete the left half. Follow the instructions from*, but bind off 9 sts. after Row 483.

ON CAM BOX SIDE, bind off 4 sts. after Row 482 (EVEN ROWS = SHOULDER SHAPING); 8 sts. after Rows 483 (ODD ROWS = NECK SHAPING); 4 sts. after Rows 484, 485, 486, 487, 488; 3 sts. after Row 489; 4 sts. after Row 490; 3 sts. after Row 491; 4 sts. after Row 492; 3 sts. after Row 493; 5 sts. after Rows 494, 496.

* ROWS 455 to 482: Knit even.

ON CAM BOX SIDE, bind off 4 sts. after Rows 396, 397; 2 sts. after Rows 398, 399, 400, 401, 402, 403, 404, 405; 1 st. after Rows 406, 407, 408, 409, 410, 411, 412, 413, then knit to Row 454, put 60 needles on the left side into holding position and complete the right half first.



ON EACH SIDE, increase 1 st. after Rows 310, 320, 330, 340, 350, 360, 370, then knit to Row 396. (For the Front Section knit to Row 376).

Continue to decrease 1 st. ON EACH SIDE after Rows 240, 250, 258. (Continue with color 1 after Row 260) 266, 274, 282, 290, then knit to Row 310.

ON EACH SIDE, decrease 1 st. after Rows 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230, then knit to Row 240, change to color 2 and work the Color Stripes as marked in the Diagram.

ROWS 0 to 70: Knit even.

Cast on 185 sts. with color 1 and work the Norwegian Design.

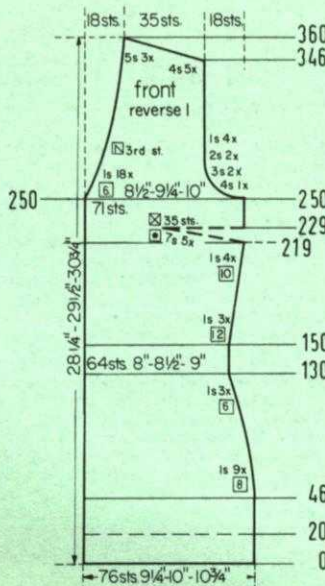

Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).


ON OPPOSITE SIDE OF CAM BOX (NECK SIDE), decrease 1 st. after Rows in (). ON CAM BOX SIDE, bind off 4 sts. after Row 250; (250), 3 sts. after Rows 252, 254; 2 sts. after Rows 256, (256), 258; 1 st. after Rows 260, 262, (262), 264, 266. The Armhole Shaping is now completed. Continue to decrease 1 st. on NECK SIDE after Rows 268, 274, 280, 286, 292, 298, 304, 310, 316, 322, 328, 334, 340, then again after Rows in (). For SHOULDER bind off 4 sts. after Rows 346, (346), 348, 350, 352, (352), 354; 5 sts. after Rows 356, 358, 360.

ON CAM BOX SIDE, increase 1 st. after Rows 150, 162, 174, 186, 196, 206, 216, then knit to Row 219 and work Short Rows for the Dart. ON OPPOSITE SIDE of CAM BOX put into holding position 7 needles after Rows 219, 221, 223, 225, 227. After Row 229 bring all needles back into working position, then knit to Row 250.

ON CAM BOX SIDE, decrease 1 st. after Rows 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 124, 130, then knit to Row 150.

ROWS 0 to 46: Knit even.

Cast on 76 sts. and work the Ribbed Pattern.

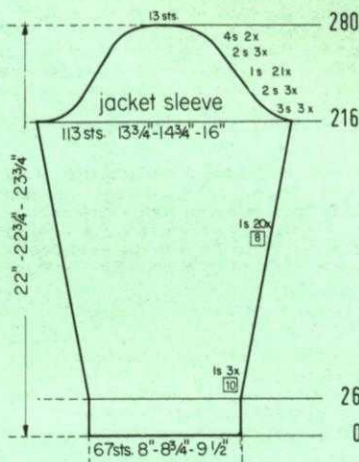


ON CAM BOX SIDE, bind off 3 sts. after Rows 216, 217, 218, 219, 220, 221; 2 sts. after Rows 222, 223, 224, 225, 226, 227. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268. ON CAM BOX SIDE, bind off 2 sts. after Rows 270, 271, 272, 273, 274, 275; 4 sts. after Rows 276, 277, 278, 279; 13 sts. after Row 280.

ON EACH SIDE, increase 1 st. after Rows 26, 36, 46, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 176, 184, 192, 200, 208, then knit to Row 216.

ROWS 0 to 26: Knit even, then transfer the appropriate ribber sts. to the main machine and work the ribbed pattern.

Cast on 67 sts. and work K1, P1, Ribbing.



Cast on 153 sts. with color 1 and work 12 rows K1, P1, Ribbing, then bind off all sts.

ON CAM BOX SIDE, bind off 3 sts. after Rows 56, 57, 58, 59, 60, 61; 2 sts. after Rows 62, 63, 64, 65, 66, 67, 68, 69, 70, 71. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102. ON CAM BOX SIDE, bind off 2 sts. after Rows 104, 105, 106, 107; 3 sts. after Rows 108, 109, 110, 111; 4 sts. after Rows 112, 113; 13 sts. after Row 114.

ON EACH SIDE, increase 1 st. after Rows 12, 18, 24, 30, 36, 42, 48, 52, then knit to Row 56.

ROWS 0 to 12: Knit even, then change to stockinette st.



Cast on 95 sts. with color 1 and work K1, P1, Ribbing.

DK 8123

SIZE:	10 (Bust 32"-33")	12 (Bust 34"-35")	16 (Bust 37"-38")
YARN:	Beatrice	Amore	Amore
50 gr. BALLS:	16	17	18
TENSION:	3 to 5	6 to 8	7 to 9
GAUGE:	2" Stk. 17 sts. 24 rows Pattern 17 sts. 30 rows	16 sts. 24 rows 16 sts. 29 rows	15 sts. 23 rows 15 sts. 29 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch, worn on the knit side. Holding Position with Eyelet Design Borders, worn on the purl side. Follow the Line Drawing for the Pattern Stitch. To turn the knitting after the borders are completed use your reversing bar or knit several rows with contrast waste yarn, then remove the knitting from the machine by knitting 1 row without yarn. Now turn the knitting around, having the knit side facing you. Place the garment sts. back onto the machine, remove the waste yarn and place the sts. under the sinkers. Turn the Row Counter to the proper row and continue knitting. DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle. Begin the Dart decreases by hanging the sts. together as marked in the Diagrams, then move the sts. together to fill the empty needles. The following decreases for the Darts lie directly above. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. While working the Design, increase the sleeve sts. by hanging the end st. from the row below onto the next empty needle.

FINISHING: Block all sections. SKIRT: Weave the sections together at sides, 1 st. in from each edge. Turn under 12 rows on lower edge and 14 rows on upper edge and hem to wrong side. Insert an elastic band into the upper hem. BLOUSE: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Turn under 12 rows on lower edge and 12 rows on sleeve edges and hem to wrong side. Sew 1 edge of neckband to inside and 1 edge to outside of neckline. Work 1 row of slip st. crochet around the back opening. Work 3 loops on 1 side and sew 3 buttons to other side of opening. Purchase a belt kit, then finish the belt. (See picture).

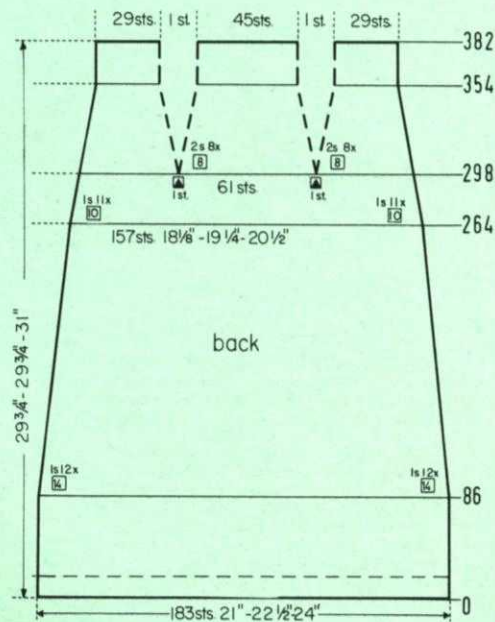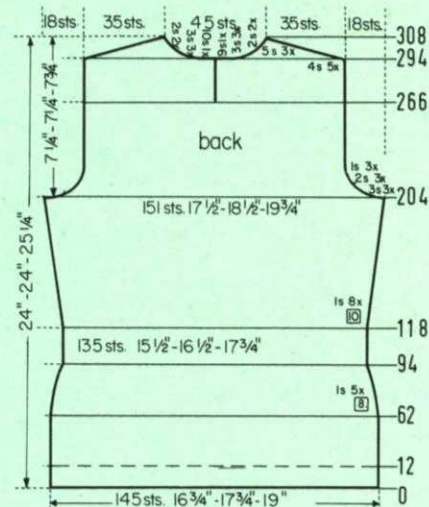

DK 8118

SIZE:	10 (Bust 32"-33")	12 (Bust 34"-35")
YARN:	Amore	Amore
50 gr. BALLS:	13	14
TENSION:	7 to 9	8 to 10
GAUGE:	2" Stk. 15 sts. 23 rows Pattern 15 sts. 30 rows	14 sts. 22 rows 14 sts. 29 rows

The instructions are the same for both sizes. PATTERN: SKIRT: Stockinette Stitch, worn on the knit side; BLOUSE: Holding Position Design, worn on the purl side. HOLDING POSITION DESIGN: Using Wheel No. 3, put the 4th, 8th, 12th etc. needles into holding position and knit 2 rows. Now push in the right Cam Control Button and the right Needle Retractor Button, then knit 1 row. Release the Cam Control Button and the Needle Retractor Button, then knit 1 row. Repeat these steps for Pattern. After shapings, work the Pattern as established. To increase, place the end st. from the row below onto the next empty needle. Skirt DECREASES: Hang the 4th st. onto the 3rd st., then move the end sts. inward to fill the empty needle. Begin the DARTS by hanging the sts. together as marked in the Diagrams, then move the sts. together to fill the empty needles. The following decreases for the Darts lie directly above.

FINISHING: Block all sections. SKIRT: Weave the front and back section together, 1 st. in from each edge. Turn under 18 rows on lower edge and 14 rows on upper edge and hem to wrong side. Insert an elastic band into upper hem. BLOUSE: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Sew the pockets in place. Join short ends of neckband, then sew the band to neckline. With center of the front band to center of the front section, sew 1 long edge of front band to the left side of center. Sew buttons to front band. (See picture).



Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 304 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 305, 307, 309, (ODD ROWS = NECK SHAPING); 2 sts. after Rows 311, 313; 1 st. after Row 315; 3 sts. after Row 316 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 317; 3 sts. after Row 318; 1 st. after Row 319; 3 sts. after Row 320; 1 st. after Row 321; 3 sts. after Row 322; 1 st. after Row 323; 3 sts. after Row 324; 1 st. after Row 325; 3 sts. after Rows 326, 328.


ON CAM BOX SIDE, bind off 3 sts. after Rows 214, 215, 216, 217; 2 sts. after Rows 218, 219, 220, 221, 222, 223; 1 st. after Rows 224, 225, 226, 227, then knit to Row 304, bind off the center 21 sts., put the needles on the left side into holding position and complete the right half first. (For the FRONT Section knit to Row 256).

ON EACH SIDE, increase 1 st. after Rows 76, 110, 144, 178, then knit to Row 214.

ROWS 17 to 76: Knit even.

ROWS 0 to 16: Knit even, then transfer the ribber sts. to the main machine and work the Holding Position Design.


Cast on 121 sts. and work K1, P1, Ribbing.



Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 256 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 257, 259; 2 sts. after Rows 261, 263, 265; 1 st. after Rows 267, 269, 271, 273, 275, 277, 281, 285, 289, 293, 297, 301. For SHOULDER bind off 3 sts. after Rows 316, 318, 320, 322, 324, 326, 328.

Work the front section the same as the back section to ROW 256, then bind off the center 11 sts., put the needles on the left side into holding position and complete the right half first.

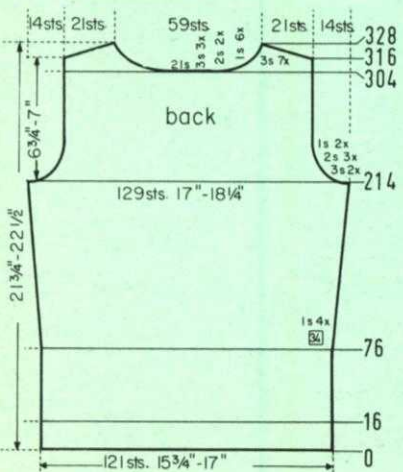

Move the Cam Box to the left side, turn the Row Counter back to 266 and complete the left half. Follow the instructions from*.

ON CAM BOX SIDE, bind off 4 sts. after Row 294 (EVEN ROWS = SHOULDER SHAPING); 9 sts. (10 sts. for the left half) after Row 295 (ODD ROWS = NECK SHAPING); 4 sts. after Row 296; 3 sts. after Row 297; 4 sts. after Row 298; 3 sts. after Row 299; 4 sts. after Row 300; 3 sts. after Row 301; 4 sts. after Row 302; 2 sts. after Row 303; 5 sts. after Row 304; 2 sts. after Row 305; 5 sts. after Rows 306, 308.

*ROWS 267 to 294: Knit even.


ON CAM BOX SIDE, bind off 3 sts. after Rows 204, 205, 206, 207, 208, 203; 2 sts. after Rows 210, 211, 212, 213, 214, 215; 1 st. after Rows 216, 217, 218, 219, 220, 221, then knit to Row 266, put 58 needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 118, 128, 138, 148, 158, 168, 178, 188, then knit to Row 204. (For the FRONT Section make the increases after Row 188, but do not knit).

ON EACH SIDE, decrease 1 st. after Rows 62, 70, 78, 86, 94, then knit to Row 118.

ROWS 0 to 61: Knit even, then turn the knitting around, turn the Row Counter to 62 and work stockinette st.

Cast on 145 sts. and work the Holding Position with Eyelets Design.

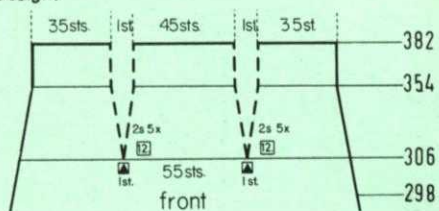

Decrease 2 sts. for EACH DART after Rows in (). Continue to decrease 1 st. ON EACH SIDE after Rows 304, (306), 314, (318), 324, (330), 334, (342), 344, 354, (354), then knit to Row 382 and bind off the remaining 117 sts.



Work the front section the same as the back section to ROW 298.

Decrease 2 sts. for EACH DART after Row 298, then again after Rows in (). Continue to decrease 1 st. ON EACH SIDE after Rows 304, (306), 314, (314), (322), 324, (330), 334, (338), 344, (346), 354, (354), then knit to Row 382 and bind off the remaining 105 sts.

ON EACH SIDE, decrease 1 st. after Rows 86, 100, 114, 128, 142, 156, 170, 184, 198, 212, 226, 240, 254, 264, 274, 284, 294, then knit to Row 298. (Knit the FRONT Section the same to ROW 298).

ROWS 0 to 85: Knit even, then turn the knitting around, turn the Row Counter to 86 and work stockinette st.

Cast on 183 sts. and work the Holding Position with Eyelets Design.

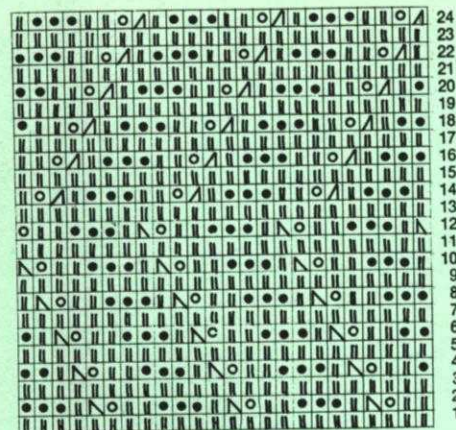


Cast on 121 sts. and work 14 rows stockinette st., then bind off all sts.

Move the Cam Box to the left side, turn the Row Counter back to 280 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 281, 283; 2 sts. after Rows 285, 287; 1 st. after Rows 289, 291, 293, 295, 297. For SHOULDER bind off 4 sts. after Rows 304, 306, 308, 310, 312; 5 sts. after Rows 314, 316, 318.

ON CAM BOX SIDE, bind off 3 sts. after Rows 214, 215, 216, 217, 218, 219; 2 sts. after Rows 220, 221, 222, 223, 224, 225; 1 st. after Rows 226, 227, 228, 229, 230, 231, then knit to Row 280, bind off the center 15 sts., put the needles on the left side into holding position and complete the right half first.

Work the front section the same as the back section to ROW 188, then work Short Rows for the Bust DARTS. ON OPPOSITE SIDE of CAM BOX put into holding position 7 needles after Rows 188, 189, 190, 191, 192, 193, 194, 195, 196, 197. ON OPPOSITE SIDE of CAM BOX bring all needles back into working position after Rows 198, 199, then knit to Row 214.

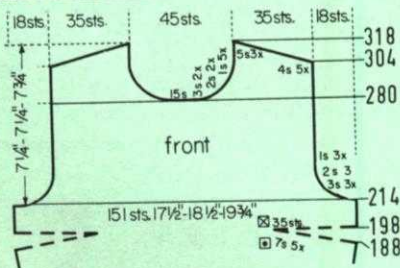


ON CAM BOX SIDE, bind off 4 sts. after Rows 84, 85; 3 sts. after Rows 86, 87, 88, 89; 2 sts. after Rows 90, 91, 92, 93, 94, 95, 96, 97. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134. ON CAM BOX SIDE, bind off 2 sts. after Rows 136, 137, 138, 139, 140, 141; 3 sts. after Rows 142, 143, 144, 145; 11 sts. after Row 146.

Continue to increase 1 st. ON EACH SIDE after Rows 66, 72, 76, 80, then knit to Row 84.


ON EACH SIDE, increase 1 st. after Rows 24, 30, 36, 42, 48, 54, 60, then knit to Row 61, turn the knitting around, turn the Row Counter to 62 and work stockinette st.

ROWS 0 to 24: Knit even.

Cast on 87 sts. and work the Holding Position with Eyelet Design.



Cast on 19 sts. and work 344 rows stockinette st., then bind off all sts.





Cast on 195 sts. and work 14 rows K1, P1, Ribbing, then bind off all sts.

ON CAM BOX SIDE, bind off 3 sts. after Rows 62, 63; 2 sts. after Rows 64, 65, 66, 67, 68, 69. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120. ON CAM BOX SIDE, bind off 2 sts. after Rows 122, 123; 3 sts. after Rows 124, 125, 126, 127; 11 sts. after Row 128.


ON EACH SIDE, increase 1 st. after Rows 14, 20, 26, 32, 38, 42, 46, 50, 54, 58, then knit to Row 62.

ROWS 0 to 14: Knit even, then transfer the ribber sts. to the main machine and work the Holding Position Design.


Cast on 77 sts. and work K1, P1, Ribbing.



Cast on 163 sts. and work 14 rows K1, P1, Ribbing, then bind off all sts.




Cast on 31 sts. and work 48 rows the Holding Position Design, then transfer every other st. to the ribber and work 14 rows K1, P1, Ribbing. After Row 62 bind off all sts.

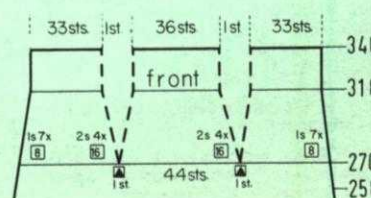

Continue to decrease 1 st. ON EACH SIDE after Rows 260, 270, (270), 278, 286, (286), 294, 302, (302), 310, 318, (318), then knit to Row 346 and bind off the remaining 104 sts.

Work the front section the same as the back section to ROW 258, then decrease 2 sts. for EACH DART after Rows in ().

Continued on next page


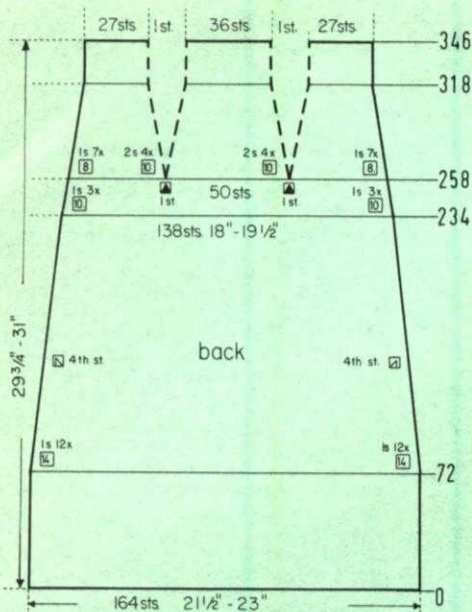


Decrease 2 sts. for EACH DART after Row 258, then again after Rows in (). Continue to decrease 1 st. ON EACH SIDE after Rows 260, (268) 270, 278, (278), 286, (288), 294, (298), 302, (308), 310, 318, (318), then knit to Row 346 and bind off the remaining 92 sts.


ON EACH SIDE, decrease 1 st. after Rows 72, 86, 100, 114, 128, 142, 156, 170, 184, 198, 212, 226, 240, 250, then knit to Row 258. (Knit the FRONT Section the same to ROW 258).

ROWS 0 to 72: Knit even.

Cast on 164 sts. and work stockinette st.

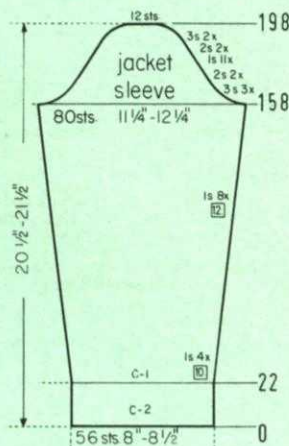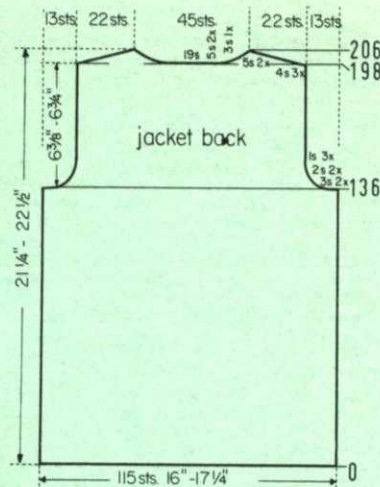

Cast on 17 sts. with color 2 and work stockinette st. Make buttonholes after Rows 28, 50, 72, 94, 116 over the 3rd-6th and 13th-16th sts. counting from the left side. After Row 446 bind off all sts.




KK 5392

SIZE:	10 (Chest 28"-29")	12 (Chest 30"-31")
YARN:	Flamingo Dralon	Flamingo Dralon
50 gr. BALLS:	Jacket 6 Color 1 2 Color 2 Pullover 3 Color 1 3 Color 2 3 Color 3	6 Color 1 2 Color 2 3 Color 1 3 Color 2 3 Color 3
TENSION:	8 to 9	9 to 10
GAUGE:	2" 14 sts. 19 rows	13 sts. 18 rows



The instructions are the same for both sizes. PATTERN: Pullover: Stockinette Stitch with repeated Color Stripes as marked in the Diagrams. EDGES: K1, P1, Ribbing. Jacket: Stockinette Stitch worn on the purl side. EDGES and BAND: Stockinette Stitch worn on the knit side. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. DECREASES: Hang the 3rd st. onto the 2nd needle, then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections. JACKET: Join back and front sections at sides and shoulders. Sew the sleeves together and set in. Turn under 11 rows on lower edge and hem to wrong side. Turn over 11 rows on sleeve edges and upper edges of pockets and hem to right side. Sew the pockets in place. Sew 1 edge of the band to inside and 1 edge to outside of front edges and around neckline. Finish the buttonholes, sew on buttons. PULLOVER: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Join the short ends of collar, then sew 1 edge of the collar to inside and 1 edge to outside of neckline.



Cast on 125 sts. with color 1, work K1, P1, Ribbing and the repeated Color Stripes as marked in the Diagram. After Row 58 bind off all sts.

Move the Cam Box to the left side, turn the Row Counter back to 182 and complete the left half. Follow the instructions from*.


*ON CAM BOX SIDE, bind off 4 sts. after Row 182 (EVEN ROWS = SHOULDER SHAPING); 5 sts. after Row 183 (ODD ROWS = NECK SHAPING); 4 sts. after Row 184; 5 sts. after Row 185; 4 sts. after Row 186; 3 sts. after Row 187; 5 sts. after Rows 188, 190.

ON CAM BOX SIDE, bind off 3 sts. after Rows 128, 129; 2 sts. after Rows 130, 131, 132, 133; 1 st. after Rows 134, 135, 136, 137, 138, 139, 140, 141, then knit to Row 182, bind off the center 17 sts., put the needles on the left side into holding position and complete the right half first. (For the Front Section knit to Row 164).

ROWS 25 to 128: Knit even.

ROWS 0 to 24: Knit even, then change to stockinette st.

Cast on 109 sts. with color 1, work K1, P1, Ribbing and the repeated Color Stripes as marked in the Diagram.

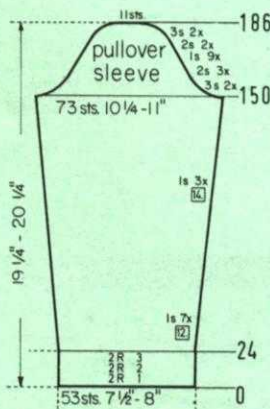

ON CAM BOX SIDE, bind off 3 sts. after Rows 150, 151, 152, 153; 2 sts. after Rows 154, 155, 156, 157, 158, 159. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 160, 162, 164, 166, 168, 170, 172, 174, 176. ON CAM BOX SIDE, bind off 2 sts. after Rows 178, 179, 180, 181; 3 sts. after Rows 182, 183, 184, 185; 11 sts. after Row 186.

ON EACH SIDE, increase 1 st. after Rows 24, 36, 48, 60, 72, 84, 96, 108, 122, 136, then knit to Row 150.



ROWS 0 to 24: Knit even, then change to stockinette st.

Cast on 53 sts. with color 1, work K1, P1, Ribbing and the repeated Color Stripes as marked in the Diagram.

Move the Cam Box to the left side, turn the Row Counter back to 164 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 165, 167; 2 sts. after Rows 169, 171, 173; 1 st. after Rows 175, 177, 179. For SHOULDER bind off 4 sts. after Rows 182, 184, 186; 5 sts. after Rows 188, 190.

Work the front section the same as the back section to ROW 164, then bind off the center 13 sts., put the needles on the left side into holding position and complete the right half first.

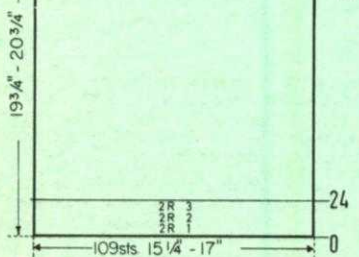


Move the Cam Box to the left side, turn the Row Counter back to 198 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Row 198 (EVEN ROWS = SHOULDER SHAPING); 5 sts. after Row 199 (ODD ROWS = NECK SHAPING); 4 sts. after Row 200; 5 sts. after Row 201; 4 sts. after Row 202; 3 sts. after Row 203; 5 sts. after Rows 204, 206.

ON CAM BOX SIDE, bind off 3 sts. after Rows 136, 137, 138, 139; 2 sts. after Rows 140, 141, 142, 143; 1 st. after Rows 144, 145, 146, 147, 148, 149, then knit to Row 198, bind off the center 19 sts., put the needles on the left side into holding position and complete the right half first.

ROWS 0 to 136: Knit even.

Cast on 115 sts. with color 1 and work stockinette st.

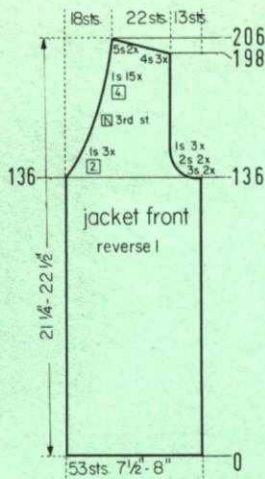


Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).


ON OPPOSITE SIDE of CAM BOX (NECK SIDE) decrease 1 st. after Rows in (). ON CAM BOX SIDE (ARMHOLE SIDE) bind off 3 sts. after Rows 136, (136), 138; (138). 2 sts. after Rows 140, (140), 142; (142), 1 st. after Rows 144, 146, (146), 148. The Armhole Shaping is now completed. Continue to decrease 1 st. on NECK SIDE after Rows 150, 154, 158, 162, 166, 170, 174, 178, 182, 186, 190, 194, then 1 more time after Row in (). For SHOULDER bind off 4 sts. after Rows 198, (198), 200, 202; 5 sts. after Rows 204, 206.

ROWS 0 to 136: Knit even.

Cast on 53 sts. with color 1 and work stockinette st.



Cast on 34 sts. with color 1 and work stockinette st. After Row 32 change to color 2, then knit to Row 54 and bind off all sts.



Cast on 25 sts. with color 1 and work stockinette st. After Row 26 change to color 2, then knit to Row 48 and bind off all sts.

MK 5391

ON CAM BOX SIDE, bind off 3 sts. after Rows 158, 159, 160, 161, 162, 163; 2 sts. after Rows 164, 165, 166, 167. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188. ON CAM BOX SIDE, bind off 2 sts. after Rows 190, 191, 192, 193; 3 sts. after Rows 194, 195, 196, 197; 12 sts. after Row 198.

ON EACH SIDE, increase 1 st. after Rows 22, 32, 42, 52, 62, 74, 86, 98, 110, 122, 134, 146, then knit to Row 158.


ROWS 0 to 22: Knit even, then change to color 1.

Cast on 56 sts. with color 2 and work stockinette st.

SIZE:	6 (Chest 24"-25")	8 (Chest 26"-27")	10 (Chest 28"-29")
YARN:	Regia	Allegro Dralon	Allegro Dralon
50 gr. BALLS:			
Jacket:	5	5	6
Pullover:	3	3	4
Skirt:	3 Color 1 2 Color 2 1 Color 3	3 Color 1 2 Color 2 1 Color 3	4 Color 1 3 Color 2 1 Color 3
TENSION:	4 to 6	6 to 8	7 to 9
GAUGE:	2" Stk. 16 sts. 23 rows Pattern: 17 sts. 20 rows	15 sts. 21 rows 16 sts. 18 rows	14 sts. 20 rows 15 sts. 17 rows

The instructions are the same for all sizes. PATTERN: Jacket and Pullover: Stockinette Stitch. EDGES: K1, P1, Ribbing. SKIRT: Norwegian Design according to the Line Drawing, or use JAC 40 and Pattern No. 463. In the instructions each row in the Norwegian Design is counted as 1 row, but several movements of the Cam Box are needed to complete 1 row. SKIRT DECREASES: Hang the 1st st. onto the 2nd st. PULLOVER DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle. JACKET SLEEVE INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle.

FINISHING: Block all sections. SKIRT: Join the front sections to the back section at sides. Turn under 10 sts. on front edges, 10 rows on upper edge and 16 rows on lower edge and hem to wrong side. Insert an elastic band into upper hem and sew to front edges. Over-lap the front edges and sew snaps in place. JACKET: Join back and front sections at sides and shoulders. Sew the sleeves together and set in. Turn under 12 sts. at front edges and hem to wrong side. Sew 1 edge of collar to inside and 1 edge to outside of neckline. Finish the buttonholes, sew on buttons. PULLOVER: Join front and back section at sides. Sew the sleeves together, then weave the sleeves to front and back section, 1 st. in from each edge. Sew the neckband to neckline. Work 1 row of slip st. crochet around the back opening. Work 3 loops on 1 side and sew 3 buttons to other side of opening.



ON EACH SIDE, decrease 1 st. after Rows 32, 38, 44, 50, 56, 62, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108 AND after Row 108 change to color 1 and work stockinette st. to Row 128, then bind off all 106 sts.

ROWS 0 to 32: Knit even.

140 sts. with color 1 and work the Norwegian Design.



Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).

ON OPPOSITE SIDE of CAM BOX decrease 1 st. after Rows in (). ON CAM BOX SIDE, decrease 1 st. after Rows 32, (32), 38, (42), 44, 50, (52), 56, (60), 62, 68, (68), 72, 76, (76), 80, 84, (84), 88, 92, (92), 96, 100, (100), 104, 108, (108), AND after Row 108 change to color 1 and work stockinette st. to Row 118, then bind off 19 sts. ON OPPOSITE SIDE of CAM BOX (use a separate length of yarn). Knit over the remaining 79 sts. to Row 128, then bind off all sts.

ROWS 15 to 32: Knit even, over 125 sts.

ROWS 0 to 14: Knit even, then cast on 19 sts. ON OPPOSITE SIDE of CAM BOX. (Use a separate length of yarn).

Cast on 106 sts. with color 1 and work the Norwegian Design.

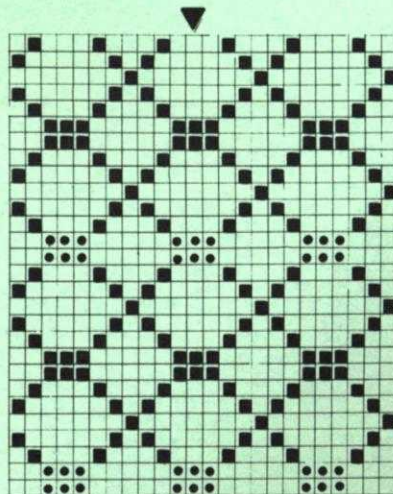

Color 2
Color 3
Color 1



BE SURE TO NOTIFY US IMMEDIATELY OF ANY CHANGE OF ADDRESS. THE POST OFFICE WILL NOT FORWARD YOUR MAGAZINE TO YOU.

(Continued on next page)

Move the Cam Box to the left side, turn the Row Counter back to 180 and complete the left half. Follow the instructions from*.



*ON CAM BOX SIDE, bind off 3 sts. after Row 180 (EVEN ROWS = SHOULDER SHAPING), 181 (ODD ROWS = NECK SHAPING); 4 sts. after Row 182; 3 sts. after Row 183; 4 sts. after Row 184; 2 sts. after Row 185; 4 sts. after Row 186; 2 sts. after Row 187; 4 sts. after Row 188, 190, 192.

ON CAM BOX SIDE, bind off 3 sts. after Rows 112, 113, 114, 115; 2 sts. after Rows 116, 117, 118, 119; 1 st. after Rows 120, 121, 122, 123, 124, 125, 126, 127, then knit to Row 180, bind off the center 16 sts., put the needles on the left side into holding position and complete the right half first.

ROWS 21 to 112: Knit even.

ROWS 0 to 20: Knit even, then change to stockinette st.

Cast on 118 sts. and work K1, P1, Ribbing.

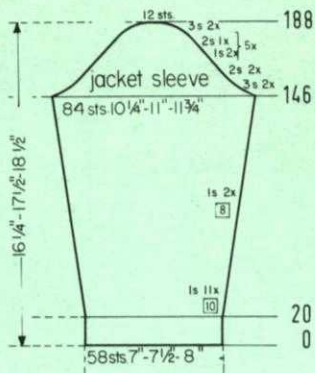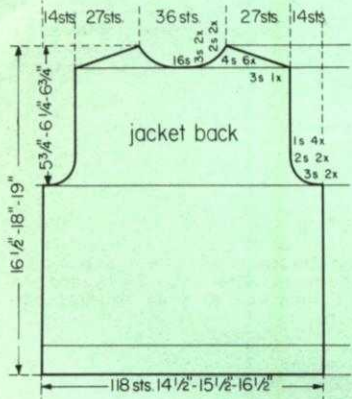

Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).



ON CAM BOX SIDE, bind off 24 sts. after Row 163; 3 sts. after Row 165; 2 sts. after Rows 167, 169, 171; 1 st. after Rows 173, 175, 177. For SHOULDER bind off 3 sts. after Row 180; 4 sts. after Rows 182, 184, 186, 188, 190, 192.

ON CAM BOX SIDE, bind off 3 sts. after Rows 112, 114; 2 sts. after Rows 116, 118; 1 st. after Rows 120, 122, 124, 126. Make buttonholes after Row 131 over the same sts. as before, then knit to Row 163.

ROWS 21 to 112: Make buttonholes after Rows 51, 91 over the same sts. as before, then knit to Row 112.

ROWS 0 to 20: Knit even and make buttonholes after Row 10 over the 3rd-7th and 18th-22nd sts. counting from the left side. After Row 20 change to stockinette st.

Cast on 75 sts. and work K1, P1, Ribbing.

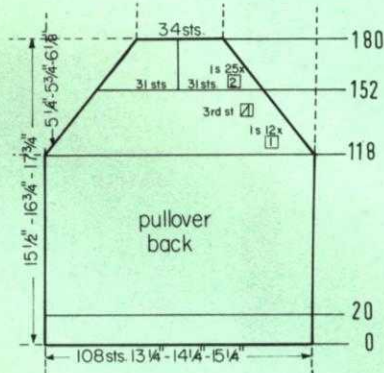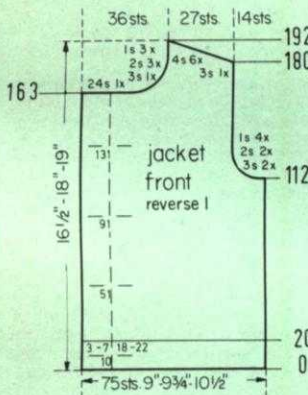


Work the second sleeve with reverse shaping, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).

ON EACH SIDE, decrease 1 st. after Rows 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, then knit to Row 90, work Short Rows and decrease 1 st. ON CAM BOX SIDE after Rows in (). ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 90, (90), 92, (92). After Row 94 bring all needles back into working position then bind off the remaining 15 sts.

ROWS 21 to 32: Knit even.

ROWS 0 to 20: Knit even, then change to stockinette st.

Cast on 75 sts. and work K1, P1, Ribbing.




Move the Cam Box to the left side, turn the Row Counter back to 160 and complete the left half. Follow the instructions from*.


*ON CAM BOX SIDE, decrease 1 st. after Row 160 (EVEN ROWS = RAGLAN SHAPING); 3 sts. after Row 161 (ODD ROWS = NECK SHAPING); 1 st. after Row 162; 3 sts. after Row 163; 1 st. after Row 164; 2 sts. after Row 165; 1 st. after Row 166; 2 sts. after Row 167; 1 st. after Rows 168, 169, 170, 171, 172, 174. After Row 176 hang the remaining 3 sts. together, (the 2 outside sts. onto the center st.) then bind off.

ON EACH SIDE, decrease 1 st. after Rows 152, 154, 156, 158, then knit to Row 160, bind off the center 8 sts., put the needles on the left side into holding position and complete the right half first.

Work the front section the same as the back section to Row 152.



Cast on 129 sts. and work K1, P1, Ribbing. Make buttonholes after Rows 10 and 32 over the 7th-11th sts. counting from the right side. After Row 42 bind off all sts.



Cast on 111 sts. and work 10 rows K1, P1, Ribbing, then bind off all sts.



ON CAM BOX SIDE, bind off 3 sts. after Rows 146, 147, 148, 149; 2 sts. after Rows 150, 151, 152, 153; 1 st. after Rows 154, 155, 156, 157; 2 sts. after Rows 158, 159; 1 st. after Rows 160, 161, 162, 163; 2 sts. after Rows 164, 165; 1 st. after Rows 166, 167, 168, 169; 2 sts. after Rows 170, 171; 1 st. after Rows 172, 173, 174, 175; 2 sts. after Rows 176, 177; 1 st. after Rows 178, 179, 180, 181; 2 sts. after Rows 182, 183; 3 sts. after Rows 184, 185, 186, 187; 12 sts. after Row 188.

ON EACH SIDE, increase 1 st. after Rows 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 138, then knit to Row 146.

ROWS 0 to 20: Knit even, then change to stockinette st.

Cast on 58 sts. and work K1, P1, Ribbing.

Move the Cam Box to the left side, turn the Row Counter back to 152 and complete the left half. Follow the instructions from*.


*ON CAM BOX SIDE, continue to decrease 1 st. after Rows 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178. After Row 180 bind off the remaining 17 sts.

ON EACH SIDE, decrease 1 st. after Rows 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, then knit to Row 152, put 31 needles on the left side into holding position and complete the right half first. (For the FRONT Section knit to Row 152, but do not divide the sts.)

ROWS 21 to 118: Knit even.

ROWS 0 to 20: Knit even, then change to stockinette st.

Cast on 108 sts. and work K1, P1, Ribbing.

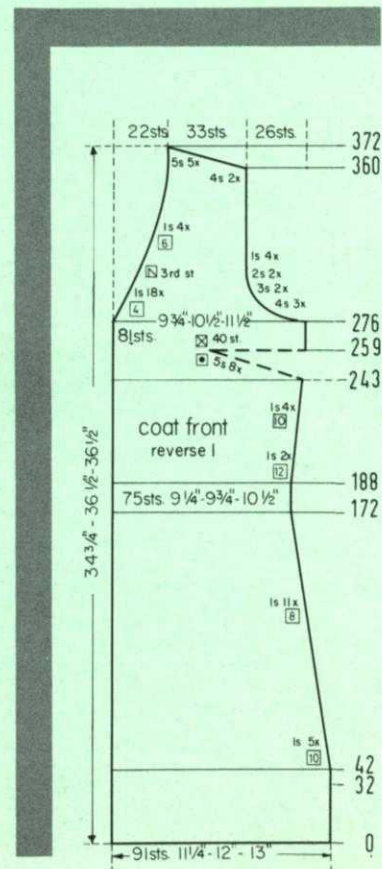


DK 8127



SIZE:	16½ (Bust 38"-39")	18½ (Bust 41"-42")	22½ (Bust 44"-45")
YARN:	Crocus Crepe	Melodie	Dolly Dralon
50 gr. BALLS:	Dress 14 Coat 14 Color 1 2 Color 2	15 15 Color 1 2 Color 2	15 15 Color 1 2 Color 2
TENSION:	6 to 8	6 to 8	8 to 10
GAUGE:	2" 16 sts. 21 rows	15 sts. 20 rows	14 sts. 20 rows
All Sizes:	21" Neck Type Zipper		

The instructions are the same for all sizes. PATTERN: Stockinette Stitch with Eyelet Chevrons on the front and back section of the dress. Follow the Line Drawing for the Eyelet Design. Dress Sleeve EDGES and Dress NECKBAND: K1, P1, Ribbing. DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. To form the hems, hang the cast-on sts. back onto the machine behind the latches, then knit the following row with 1 or 2 tension settings higher. If you prefer to sew the hems, omit forming the hems on the machine.

FINISHING: Block all sections. DRESS: Join front and back section at sides and shoulders. Sew the sleeves together and set in. Sew the neckband to neckline. Work 1 row of single crochet around the back opening, then sew in the zipper. COAT: Join the back and front sections at sides and shoulders. Sew the sleeves together and set in. Sew 1 edge of the binding to inside and 1 edge to outside of the front edges and around the neckline.

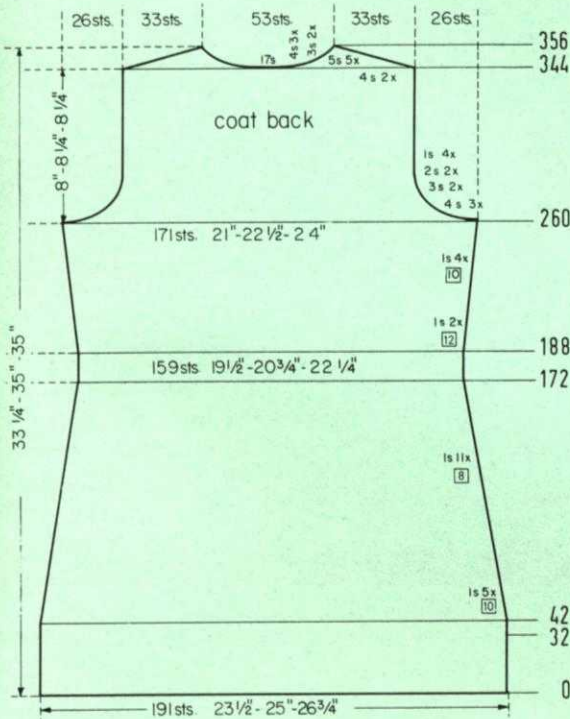

Move the Cam Box to the left side, turn the Row Counter back to 344 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Rows 344 (EVEN ROWS = SHOULDER SHAPING); 345 (ODD ROWS = NECK SHAPING), 346, 347; 5 sts. after Row 348; 4 sts. after Row 349; 5 sts. after Row 350; 3 sts. after Row 351; 5 sts. after Row 352; 3 sts. after Row 353; 5 sts. after Rows 354, 356.

ON CAM BOX SIDE, bind off 4 sts. after Rows 260, 261, 262, 263, 264, 265; 3 sts. after Rows 266, 267, 268, 269; 2 sts. after Rows 270, 271, 272, 273; 1 st. after Rows 274, 275, 276, 277, 278, 279, 280, 281, then knit to Row 344, bind off the center 17 sts., put the needles on the left side into holding position and complete the right half first.


ON EACH SIDE, increase 1 st. after Rows 188, 200, 212, 222, 232, 242, then knit to Row 260.

ON EACH SIDE, decrease 1 st. after Rows 42, 52, 62, 72, 82, 92, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, then knit to Row 188.

ROWS 33 to 42: Knit even.

ROWS 0 to 32: Knit even, then form the hem.

Cast on 191 sts. with color 1 and work stockinette st.



Cast on 18 sts. with color 2 and work 790 rows stockinette st., then bind off all sts.

Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0).

ON OPPOSITE SIDE of CAM BOX (NECK SIDE) decrease 1 st. after Rows in (). ON CAM BOX SIDE, bind off 4 sts. after Rows 276, (276), 278, 280; (280), 3 sts. after Rows 282, 284; (284), 2 sts. after Rows 286, 288; (288), 1 st. after Rows 290, 292, (292), 294, 296; (296). The Armhole Shaping is now completed. Continue to decrease 1 st. on NECK SIDE after Rows 300, 304, 308, 312, 316, 320, 324, 328, 332, 336, 340, 344, 348, 354, then again after Rows in (). For SHOULDER bind off 4 sts. after Rows 360, (360), 362; 5 sts. after Rows 364, 366, (366), 368, 370, 372.


ON CAM BOX SIDE, increase 1 st. after Rows 188, 200, 212, 222, 232, 242, then knit to Row 243 and work Short Rows for the Dart. ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 243, 245, 247, 249, 251, 253, 255, 257. After Row 259 bring all needles back into working position, then knit to Row 276.

ON CAM BOX SIDE, decrease 1 st. after Rows 42, 52, 62, 72, 82, 92, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, then knit to Row 188.

ROWS 33 to 42: Knit even.

ROWS 0 to 32: Knit even, then form the hem.

Cast on 91 sts. with color 1 and work stockinette st.

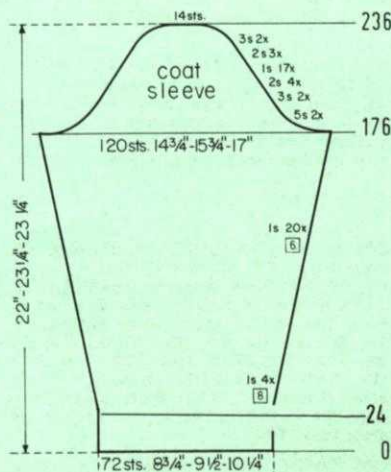

ON CAM BOX SIDE, bind off 5 sts. after Rows 176, 177, 178, 179; 3 sts. after Rows 180, 181, 182, 183; 2 sts. after Rows 184, 185, 186, 187, 188, 189, 190, 191. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224. ON CAM BOX SIDE, bind off 2 sts. after Rows 226, 227, 228, 229, 230, 231; 3 sts. after Rows 232, 233, 234, 235; 14 sts. after Row 236.

ON EACH SIDE, increase 1 st. after Rows 24, 32, 40, 48, 56, 62, 68, 74, 80, 86, 92, 98, 104, 110, 116, 122, 128, 134, 140, 146, 152, 158, 164, 170, then knit to Row 176.

ROWS 0 to 24: Knit even, then form the hem and change to color 1.

Cast on 72 sts. with color 2 and work stockinette st.

Continued on pages 22 & 23

Move the Cam Box to the left side, turn the Row Counter back to 220 and complete the left half. Follow the instructions from*.

ON CAM BOX SIDE, bind off 4 sts. after Row 420 (EVEN ROWS = SHOULDER SHAPING); 8 sts. (7 sts. for the left half) after Row 421 (ODD ROWS = NECK SHAPING); 5 sts. after Row 422; 4 sts. after Row 423; 5 sts. after Row 424; 4 sts. after Row 425; 5 sts. after Row 426; 3 sts. after Row 427; 5 sts. after Row 428; 3 sts. after Row 429; 5 sts. after Row 430; 3 sts. after Row 431; 5 sts. after Row 432.

ON CAM BOX SIDE, bind off 4 sts. after Rows 340, 342; 3 sts. after Rows 344, 346; 2 sts. after Rows 348, 350; 1 st. after Rows 352, 354, 356, 358, 360, 362, then knit to Row 420.

ON CAM BOX SIDE, increase 1 st. after Rows 272, 280, 288, 296, 304, 312, 318, 324, then knit to Row 340.
Decrease 1 st. ON CAM BOX SIDE after Rows 224, 230, 236, 242, 248, 252, 256, then knit to Row 272.



* ROWS 221 to 224: Knit even.

ON EACH SIDE, decrease 1 st. after Rows 56, 70, 84, 98, then knit to Row 104 and begin the Eyelet Design. Continue to decrease 1 st. ON EACH SIDE after Rows 112, 126, 140, 154, 168, then knit to Row 180 and begin the second Eyelet Chevron. Continue to decrease 1 st. ON EACH SIDE after Rows 182, 188, 194, 200, 206, 212, 218, then knit to Row 220, put 81 sts. on the left side into holding position (or on a stitch holder) and complete the right half first. (For the Front Section knit to ROW 218 but do not make decreases.)


ROWS 33 to 56: Knit even.

ROWS 0 to 32: Knit even, then form the hem.

Cast on 195 sts. and work stockinette st.

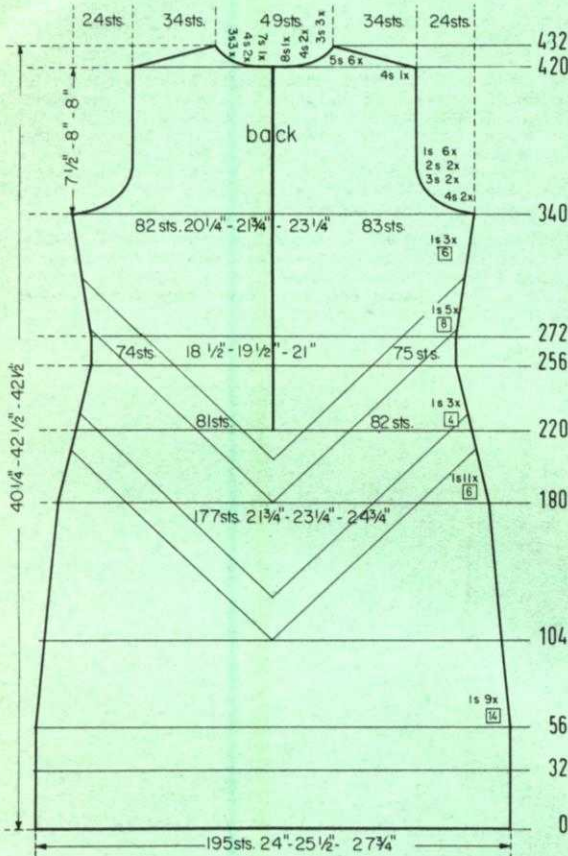

Cast on 143 sts. and work 12 rows K1, P1, Ribbing, then bind off all sts.

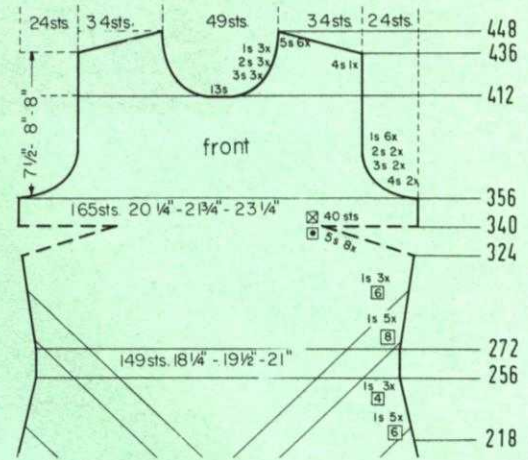


DK 8125

SIZE:	10 (Bust 32")	12 (Bust 34")	14 (Bust 36")
YARN:	Beatrice	Crocus Crepe	Amore
50 gr. BALLS:	15 Color 1 1 Color 2 1 Color 3	19 Color 1 1 Color 2 1 Color 3	16 Color 1 1 Color 2 1 Color 3
TENSION:	3 to 5	5 to 7	7 to 9
GAUGE:	2" 17 sts. 24 rows	16 sts. 23 rows	15 sts. 23 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch with Color Stripes on the Sleeve Edges and on the Belt. DECREASES: Hang the 3rd st. onto the 2nd st., then move the end sts. inward to fill the empty needle. FRONT and NECKLINE SHAPING: Hang the 14th st. onto the 13th st., then move the end sts. inward to fill the empty needle. Begin the DART decreases by hanging the sts. together as marked in the Diagrams, then move the sts. together to fill the empty needle. The following Dart decreases, then increases lie directly above. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle.

FINISHING: Block all sections. Join the back and front sections at sides and shoulders. Weave the facing sts. together, then sew the facing to back neckline. Turn under 18 rows on lower edge and hem to wrong side. Sew the sleeves together and set in. Turn under 12 sts. on front edges and around neckline and hem to wrong side. Weave the binding to the fold line of neckline, then fold in half and sew to wrong side. Finish the buttonholes. Over-lap the front sections, then sew buttons and snaps in place. (See picture). Join the belt sections at center back. Purchase a belt kit and follow the instructions included.




ON CAM BOX SIDE, bind off 4 sts. after Rows 62, 63; 3 sts. after Rows 64, 65, 66, 67; 2 sts. after Rows 68, 69, 70, 71. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112. ON CAM BOX SIDE, bind off 2 sts. after Rows 114, 115; 3 sts. after Rows 116, 117, 118, 119, 120, 121; 12 sts. after Row 122.

ON EACH SIDE, increase 1 st. after Rows 20, 26, 32, 38, 44, 40, 46, then knit to Row 62.

ROWS 0 to 20: Work 8 rows with color 1; 4 rows with color 2; 8 rows with color 1. Change to stockinette st. after Row 20 and continue working with color 1.

Cast on 90 sts. with color 1 and work K1, P1, Ribbing.

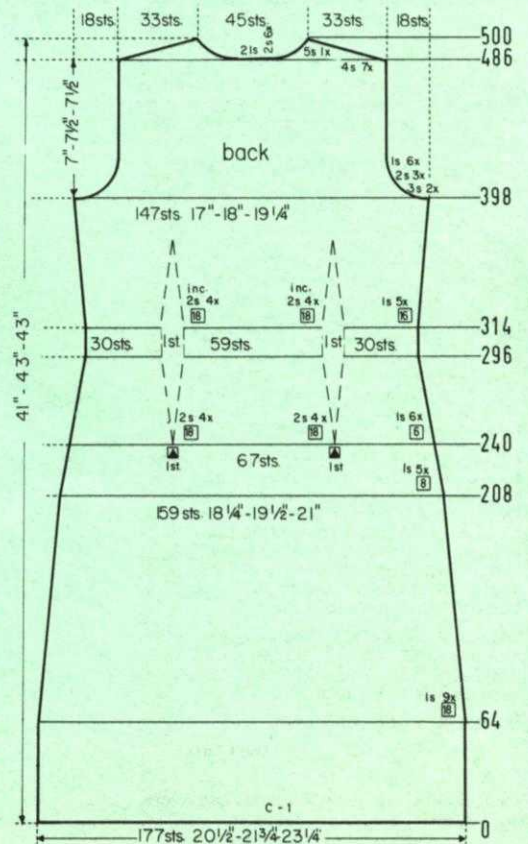

Move the Cam Box to the left side, turn the Row Counter back to 412 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Rows 413, 415, 417; 2 sts. after Rows 419, 421, 423; 1 st. after Rows 425, 427, 429. For SHOULDER bind off 4 sts. after Row 436; 5 sts. after Rows 438, 440, 442, 444, 446, 448.

ON CAM BOX SIDE, bind off 4 sts. after Rows 356, 357, 358, 359; 3 sts. after Rows 360, 361, 362, 363; 2 sts. after Rows 364, 365, 366, 367; 1 st. after Rows 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, then knit to Row 412, bind off the center 13 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 272, 280, 288, 296, 304, 312, 318, 324, but do not knit after the last increases. Work Short Rows for the Darts. ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339. ON OPPOSITE SIDE of CAM BOX bring all needles back into working position after Rows 340, 341, then knit to Row 356.

ON EACH SIDE, decrease 1 st. after Rows 218, 224, 230, 236, 242, 248, 252, 256, then knit to Row 272.


Work the front section the same as the back section to ROW 218.

ON CAM BOX SIDE, bind off 5 sts. after Rows 44, 45, 46, 47; 4 sts. after Rows 48, 49; 3 sts. after Rows 50, 51, 52, 53; 2 sts. after Rows 54, 55. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90. ON CAM BOX SIDE, bind off 2 sts. after Rows 92, 93; 3 sts. after Rows 94, 95, 96, 97, 98, 99; 15 sts. after Row 100.


ON EACH SIDE, increase 1 st. after Rows 12, 16, 20, 24, 28, 32, 36, 40, then knit to Row 44.

ROWS 0 to 12: Knit even, then change to stockinette st.

Cast on 101 sts. and work K1, P1, Ribbing.

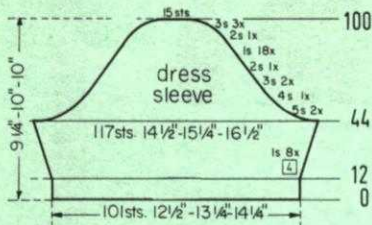

Continue in Chevron



Cast on 150 sts. with color 2 and work stockinette st. Work 10 rows with color 2; 2 rows with color 3; 4 rows with color 2; 2 rows with color 3 and 10 rows with color 2. After Row 28 bind off all sts. Work the second belt section the same.

Move the Cam Box to the left side, turn the Row Counter back to 486 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Row 486 (EVEN ROWS = SHOULDER SHAPING); 2 sts. after Row 487 (ODD ROWS = NECK SHAPING); 4 sts. after Row 488; 2 sts. after Row 489; 4 sts. after Row 490; 2 sts. after Row 491; 4 sts. after Row 492; 2 sts. after Row 493; 4 sts. after Row 494; 2 sts. after Row 495; 4 sts. after Row 496; 2 sts. after Row 497; 4 sts. after Row 498; 5 sts. after Row 500.


ON CAM BOX SIDE, bind off 3 sts. after Rows 398, 399, 400, 401; 2 sts. after Rows 402, 403, 404, 405, 406, 407; 1 st. after Rows 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, then knit to Row 486, bind off the center 21 sts., put the needles on the left side into holding position and complete the right half first.

Increase 2 sts. for EACH DART after Rows in (). ON EACH SIDE, increase 1 st. after Rows 314, (314), 330, (332), 346, (350), 362, (368), 378, then knit to Row 398.

Decrease 2 sts. for EACH DART after Rows in (). ON EACH SIDE, decrease 1 st. after Rows 64, 82, 100, 118, 136, 154, 172, 190, 208, 226, 234, 242, (242), 250, 258, (260), 266, 272, 278, (278), 284, 290, 296, (296), then knit to Row 314.

ROWS 0 to 64: Knit even.

Cast on 177 sts. with color 1 and work stockinette st.

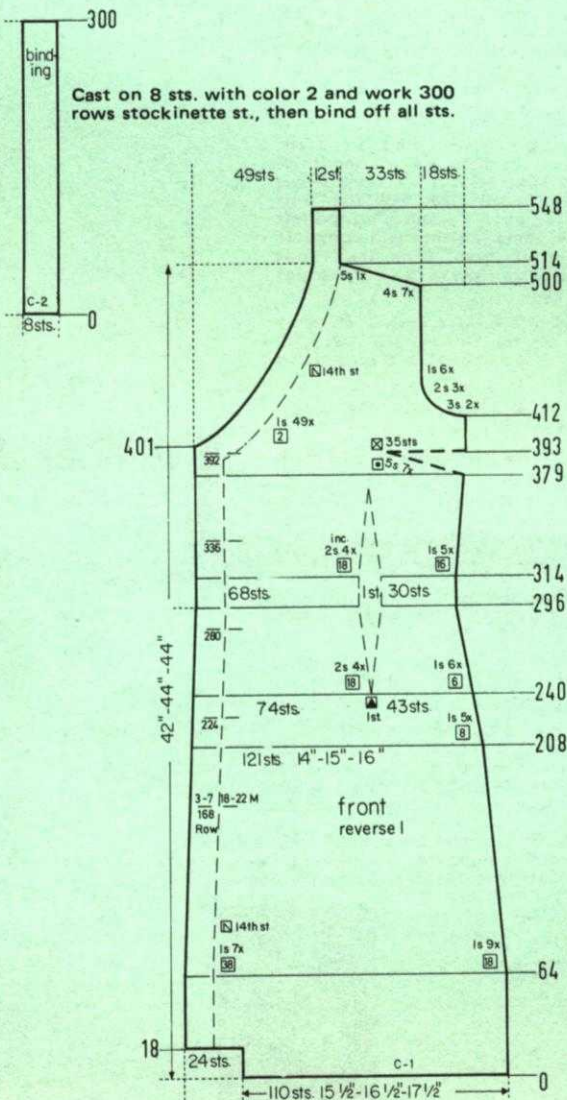

Work the second front section with reverse shapings, casting on from right to left. (Cam Box will be on the LEFT side at Row 0). Omit the buttonholes.

ON CAM BOX SIDE, (NECK SIDE) decrease 1 st. after Rows 401, 403, 405, 407, 409, 411, then again after Rows in (). ON CAM BOX SIDE, (ARMHOLE SIDE) bind off 3 sts. after Rows 412, (413), 414; (415), 2 sts. after Rows 416, (417), 418, (419), 420; (421), 1 st. after Rows 422, (423), 424, (425), 426, (427), 428, (429), 430, (413), 432. The Armhole Shaping is now completed. Continue to decrease 1 st. ON NECK SIDE after Rows 433, 435, 437, 439, 441, 443, 445, 447, 449, 451, 453, 455, 457, 459, 461, 463, 465, 467, 469, 471, 473, 475, 477, 479, 481, 483, 485, 487, 489, 491, 493, 495, 497. For SHOULDER bind off 4 sts. after Rows 500, 502, 504, 506, 508, 510, 512; 5 sts. after Row 514. Knit over the remaining 12 sts. (FACING) to Row 548, then put the sts. onto a stitch holder.

Continue to make buttonholes after Rows indicated and increase 2 sts. for the DART after Rows indicated. ON CAM BOX SIDE, increase 1 st. after Rows 314, (Dart 314), 330, (Dart 332), (Buttonholes 336), 346, (Dart 350), 362, (Dart 368), 378, then knit to Row 379 and work Short Rows for the Bust Dart. ON OPPOSITE SIDE of CAM BOX put into holding position 5 needles after Rows 379, 381, 383, 385, 387, 389, 391, (Buttonholes 392). After Row 393 bring all needles back into working position, then knit to Row 401.

Make buttonholes over the 3rd-7th and 18th-22nd sts. counting from the left side after Rows indicated. Decrease 2 sts. for the DART after Rows indicated. ON OPPOSITE SIDE of CAM BOX decrease 1 st. after Rows in (). ON CAM BOX SIDE, decrease 1 st. after Rows 64, (64), 82, 100, (102), 118, 136, (140), 154, (Buttonholes 168), 172, (178), 190, 208, (216), (Buttonholes 224), 226, 234, 242, (Dart 242), 250, (254), 258, (Dart 260), 266, 272, 278, (Dart 278), (Buttonholes 280), 284, 290, (292), 296, (Dart 296), then knit to Row 314.

ROWS 19 to 64: Knit even.

ROWS 0 to 18: Knit even, then cast on 24 sts. ON OPPOSITE SIDE of CAM BOX. (Use a separate length of yarn).

Cast on 110 sts. with color 1 and work stockinette st.

42-44
41
38-40
37
34-36
33
30-32
29
26-28
25
22-24
21
18-20
17
14-16
13
10-12
9
6-8
5
2-4
1



MK 5389

SIZE:	2 (Chest 21"-22")	4 (Chest 23"-24")
YARN:	Amore	Amore
50 gr. BALLS:	4 Color 1	5 Color 1
Both Sizes:	A Small Amount of Color 2	
TENSION:	6 to 8	7 to 9
GAUGE:	2" 17 sts. 24 rows	16 sts. 23 rows



The instructions are the same for both sizes. PATTERN: Stockinette Stitch and Cable Design according to the Line Drawing. DECREASES: Hang the end st. onto the next occupied needle. EDGES: K1, P1, Ribbing with Color Stripes.

FINISHING: Block all sections. Join front and back section at sides and shoulders. Sew the sleeves together and set in. Turn under 24 rows on lower edge and hem to wrong side. Sew the neckband to neckline. Work 1 row of single crochet around the back opening, then sew in a zipper.



Cast on 103 sts. with color 2 and work K1, P1, Ribbing. Work 2 rows with color 2; 6 rows with color 1; 2 rows with color 2. After Row 10 bind off all sts.

On the front and back section begin crossing the sts. for the Cable Design after Row 48; on the sleeves begin crossing the sts. after Row 12. Cross the sts. as follows: Hold 3 single transfer tools in your hands. Pick up the 4th, 5th and 6th sts. Place the 4th st. behind the 5th st. onto the 6th needle and the 6th st. behind the 5th st. onto the 4th needle. Hang the 5th st. back onto the 5th needle. Cross the 12th with the 14th, the 20th with the 22nd and all following sts. to be crossed in the same manner. Knit 4 rows, then repeat.

Move the Cam Box to the left side, turn the Row Counter back to 172 and complete the left half. Follow the instructions from*.

ON CAM BOX SIDE, bind off 4 sts. after Row 210 (EVEN ROWS = SHOULDER SHAPING); 10 sts. (9 sts. for the left half) after Row 211 (ODD ROWS = NECK SHAPING); 4 sts. after Row 212; 2 sts. after Row 213; 4 sts. after Row 214; 2 sts. after Row 215; 4 sts. after Row 216; 2 sts. after Row 217; 4 sts. after Row 218; 2 sts. after Row 219; 4 sts. after Row 220.


*ROWS 173 to 210: Knit even.

ON CAM BOX SIDE, bind off 3 sts. after Rows 158, 159; 2 sts. after Rows 160, 161, 162, 163; 1 st. after Rows 164, 165, 166, 167, 168, 169, then knit to Row 172, put 41 needles on the left side into holding position and complete the right half first. (For the Front Section knit to Row 172, but do not divide the sts.)

ON EACH SIDE, decrease 1 st. after Rows 48, 58, 68, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, then knit to Row 158.

ROWS 0 to 48: Knit even, then begin the Cable Design.

Cast on 129 sts. with color 1 and work stockinette st.


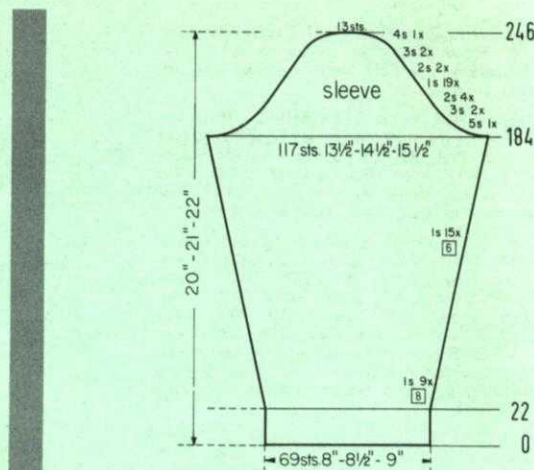


Move the Cam Box to the left side, turn the Row Counter back to 196 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 2 sts. after Rows 197, 199, 201, (ODD ROWS = NECK SHAPING); 1 st. after Rows 203, 205, 207, 209; 4 sts. after Row 210 (EVEN ROWS = SHOULDER SHAPING); 1 st. after Row 211; 4 sts. after Rows 212, 214, 216, 218, 220.

ROWS 173 to 196: Knit even, then bind off the center 13 sts., put the needles on the left side into holding position and complete the right half first.

Work the front section the same as the back section to ROW 172.

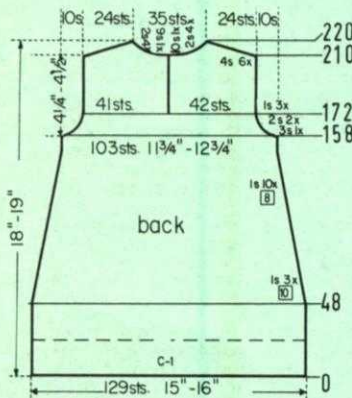


ON CAM BOX SIDE, bind off 3 sts. after Rows 20, 21; 2 sts. after Rows 22, 23, 24, 25. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50. ON CAM BOX SIDE, bind off 2 sts. after Rows 52, 53, 54, 55, 56, 57; 3 sts. after Rows 58, 59; 10 sts. after Row 60.

ROWS 11 to 20: Knit even.

Work 2 rows with color 2; 6 rows with color 1; 2 rows with color 2, then change to stockinette st. and with color 1 begin the Cable Design.

Cast on 68 sts. with color 2 and work K1, P1, Ribbing.




DP 8128

SIZE:	14 (Bust 35"-36")	16 (Bust 38"-39")	18 (Bust 40"-41")
YARN:	Beatrice	Crocus Crepe	Regia
50 gr. BALLS:	9	12	9
TENSION:	3 to 5	5 to 7	5 to 7
GAUGE:	2" 17 sts. 24 rows	16 sts. 23 rows	15 sts. 22 rows

The instructions are the same for all sizes. PATTERN: Stockinette Stitch and a Holding Position Design with Cables on the front section according to the Line Drawing. EDGES: K1, P1, Ribbing. INCREASES: Move the 2 end sts. 1 needle outward, then place the 3rd st. from the row below onto the empty needle. NECKLINE DECREASES: Hang the 20th st. on NECK SIDE onto the 19th st., then move the end sts. inward to fill the empty needle.

FINISHING: Block all sections. Join front and back section at sides and shoulders. Sew the sleeves together and set in. Weave the open sts. of the facing together, then sew the facing to back neckline. Turn under 9 sts. at front edges and around neckline and hem to wrong side. Finish the buttonholes, sew on buttons.

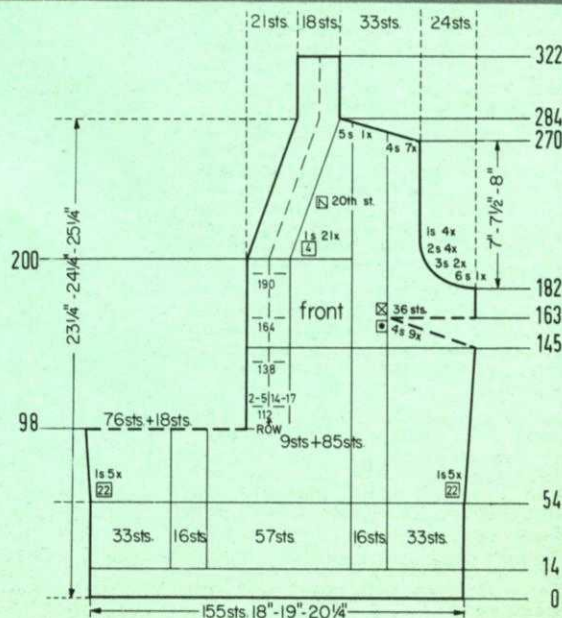

ON CAM BOX SIDE, bind off 5 sts. after Rows 184 185; 3 sts. after Rows 186, 187, 188, 189; 2 sts. after Rows 190, 191, 192, 193, 194, 195, 196, 197. ON EACH SIDE, hang the 1st st. onto the 2nd st. after Rows 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234. ON CAM BOX SIDE, bind off 2 sts. after Rows 236, 237, 238, 239; 3 sts. after Rows 240, 241, 242, 243; 4 sts. after Rows 244, 245; 13 sts. after Row 246.

ON EACH SIDE, increase 1 st. after Rows 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 100, 106, 112, 118, 124, 130, 136, 142, 148, 154, 160, 166, 172, 178, then knit to Row 184.

ROWS 0 to 22: Knit even, then change to stockinette st.

Cast on 69 sts. and work K1, P1, Ribbing.

Hang the 76 sts. from the stitch holder back onto the machine. On the RIGHT side of these sts. cast on 18 sts. using a separate length of yarn. With the Cam Box on the LEFT side and Row Counter at 98 complete the left half. Follow the instructions from*. Omit the buttonholes.

ON NECK SIDE, decrease 1 st. after Rows 204, 208, 212, 216, 220, 224, 228, 232, 236, 240, 244, 248, 252, 256, 260, 264, 268, then again after Rows in (). For SHOULDER bind off 4 sts. after Rows 270, 272, (272), 274, 276, (276), 278, 280, (280), 282; 5 sts. after Row 284. Over the remaining 18 sts. (FACING) knit to Row 284, then put these sts. onto a stitch holder.

Make buttonholes after Row in (). ON CAM BOX SIDE, bind off 6 sts. after Row 182; 3 sts. after Rows 184, 186; 2 sts. after Rows 188, 190, (190), 192, 194; 1 st. after Rows 196, then knit to ROW 198 and begin working the Holding Position Design according to PATTERN 1. ON OPPOSITE SIDE of CAM BOX decrease 1 st. after Row in (). Continue to decrease 1 st. ON CAM BOX SIDE after Rows 198, 200, (200), 202.

Make buttonholes over the 2nd-5th and 14th-17th sts. counting from the left side after Row 112, then again after Rows in (). Continue to increase 1 st. ON CAM BOX SIDE after Rows 120, (138), 142, then knit to Row 145 and knit Short Rows for the DART. ON OPPOSITE SIDE of CAM BOX put into holding position 4 needles after Rows 145, 147, 149, 151, 153, 155, 157, 159, 161. After Row 163 bring all needles back into working position, make buttonholes after Row 164 AND begin the Cable Design according to PATTERN 2 after Row 164. Knit to Row 182.


*ROWS 99 to 112: Knit even.

ON EACH SIDE, increase 1 st. after Rows 54, 76, 98, but do not knit after the last increases. On the left side, put 76 sts. onto a stitch holder. On the left side of the 85 sts. left on the machine cast on 9 sts. (Use a separate length of yarn) and complete the right half first.

ROWS 15 to 54: Knit even.

ROWS 0 to 14: Knit even, then change to stockinette st., hang the appropriate sts. onto the neighboring needles and work the Holding Position Design according to PATTERN 1 over the sts. marked on the Diagram.

Cast on 155 sts. and work K1, P1, Ribbing.

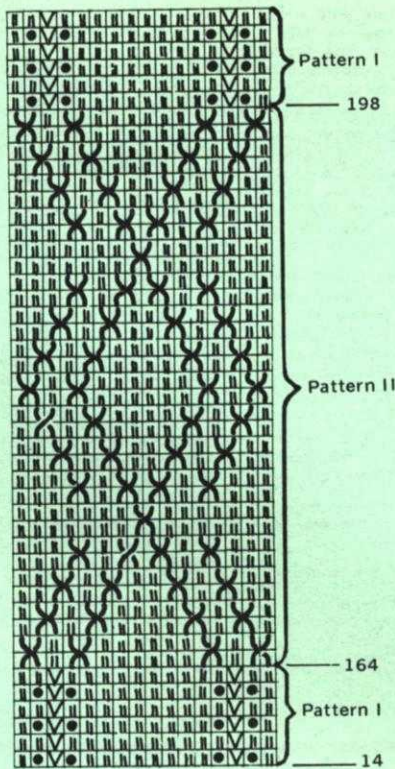

Each Pattern Stripe reaches over the 16 sts. marked on the Diagram. Begin the Pattern Stripes after Row 14. After having transferred the ribber sts. to the main machine hang the 3rd and 14th sts. of each Pattern Stripe onto the neighboring needles and leave the empty needles in the non-working position. Push in the right retractor button. (It will bring the needles in holding position automatically back into the working position). *Put the 2nd and 4th and the 13th and 15th needles of each Pattern Stripe into holding position, then knit 2 rows. Repeat from * for the Holding Position Design. (PATTERN 1) After Row 164 release the retractor button, bring the empty needles into working position and work PATTERN 2, a Cable Design. Using 2 single transfer tools, place the 1st st. onto one tool and the 2nd st. onto the other tool. Now hang the 1st st. onto the 2nd needle and the 2nd st. onto the 1st needle. Cross the 4th with the 5th st. the 12th with the 13th and the 15th with the 16th sts. in the same manner. Knit 2 rows. Now cross the 2nd and 3rd, the 5th and 6th, the 11th and 12th and the 14th and 15th sts., then knit 2 rows. Follow the Line Drawing for the following crossing of the sts. After Row 198 repeat PATTERN 1. (Remember to push in the right retractor button and to put the empty needles into the non-working position after having the appropriate sts. transferred to the neighboring needles.)

Move the Cam Box to the left side, turn the Row Counter back to 252 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 4 sts. after Row 252 (EVEN ROWS = SHOULDER SHAPING); 3 sts. after Row 253 (ODD ROWS = NECK SHAPING); 4 sts. after Row 254; 3 sts. after Row 255; 4 sts. after Row 256; 3 sts. after Row 257; 4 sts. after Row 258; 2 sts. after Row 259; 4 sts. after Row 260; 2 sts. after Row 261; 4 sts. after Row 262; 2 sts. after Row 263; 4 sts. after Row 264; 5 sts. after Row 266.


ON CAM BOX SIDE, bind off 6 sts. after Rows 164, 165; 3 sts. after Rows 166, 167, 168, 169; 2 sts. after Rows 170, 171, 172, 173, 174, 175, 176, 177; 1 st. after Rows 178, 179, 180, 181, 182, 183, 184, 185, then knit to Row 252, bind off the center 21 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, increase 1 st. after Rows 54, 76, 98, 120, 142, then knit to Row 164.

ROWS 17 to 54: Knit even.

ROWS 0 to 14: Knit even, then change to stockinette st.

Cast on 155 sts. and work K1, P1, Ribbing.

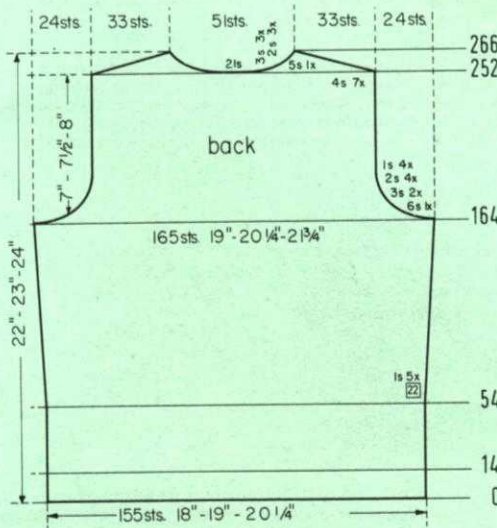



MK 5390

SIZE:	4 (Chest 23")	6 (Chest 24"-25")	8 (Chest 26"-27")
YARN:	Beatrice	Allegro Dralon	Allegro Dralon
50 gr. BALLS:	2 Color 1 1 Color 2 1 Color 3 1 Color 4 1 Color 5	2 Color 1 1 Color 2 1 Color 3 1 Color 4 1 Color 5	3 Color 1 1 Color 2 1 Color 3 1 Color 4 1 Color 5
TENSION:	Stk. 5 to 7 Pattern 6 to 8	6 to 8 7 to 9	7 to 9 8 to 10
GAUGE:	2" Stk. 16 sts. 22 rows Pattern 14 sts. 31 rows	15 sts. 21 rows 13 sts. 30 rows	14 sts. 20 rows 12 sts. 29 rows

The instructions are the same for all sizes. PATTERN: Holding Position Design according to the Line Drawing, using Wheel No. 6. Work the repeated Color Stripes as marked in the Diagram of the Back Section. The purl side is the right side. EDGES: Stockinette Stitch, worn on the knit side. DECREASES: Hang the end st. onto the next occupied needle. INCREASES: Place the end st. from the row below onto the next empty needle.

FINISHING: Block all sections. Join front and back section at sides. Sew 1 1/2" of each shoulder together, then work 1 row of single crochet around the open shoulder edges. Turn under 2" at lower edge and hem to wrong side. Sew the sleeves together and set in. Turn over 8 rows on sleeve edges and hem to right side. Sew 1 edge of front neckband to inside and 1 edge to outside of front neckline. Over-lapping 3/4" on each end of the back neckband, sew the back neckband to back neckline in the same manner. Sew the long edges of each shoulder strip together, then fasten the strips to shoulders with buttons. Close each shoulder with 3 snaps.



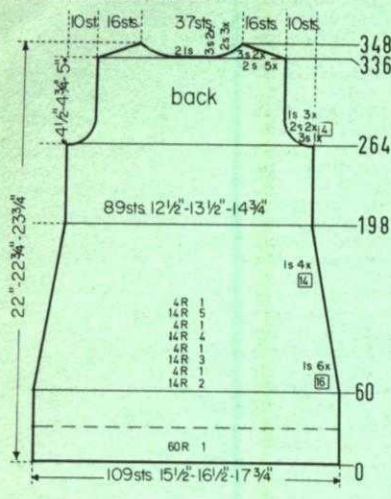

Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 336 and complete the left half. Follow the instructions from*.




*ON CAM BOX SIDE, bind off 2 sts. after Row 336 (EVEN ROWS = SHOULDER SHAPING); 3 sts. after Row 337 (ODD ROWS = NECK SHAPING); 2 sts. after Row 338; 3 sts. after Row 339; 2 sts. after Rows 340, 341, 342, 343, 344, 345; 3 sts. after Row 346, 348.

ON CAM BOX SIDE, bind off 3 sts. after Rows 264, 265; 2 sts. after Rows 268, 269, 272, 273; 1 st. after Rows 276, 277, 280, 281, 284, 285, then knit to Row 336, bind off the center 21 sts., put the needles on the left side into holding position and complete the right half first.

ON EACH SIDE, decrease 1 st. after Rows 60, 76, 92, 108, 124, 140, 156, 170, 184, 198, then knit to Row 264.

ROWS 0 to 60: Knit even, then begin the repeated Color Stripes as marked in the Diagram.

Cast on 109 sts. with color 1 and work the Holding Position Design.



Bring the needles on the left side into working position, knit 1 row in PATTERN to the left side, turn the Row Counter back to 318 and complete the left half. Follow the instructions from*.

*ON CAM BOX SIDE, bind off 3 sts. after Row 319; 2 sts. after Rows 321, 323; 1 st. after Rows 325, 327, 329, 331. For SHOULDER bind off 2 sts. after Rows 336, 338, 340, 342, 344; 3 sts. after Rows 346, 348.

Work the front section the same as the back section to ROW 318, then bind off the center 15 sts., put the needles on the left side into holding position and complete the right half first.

ON CAM BOX SIDE, bind off 3 sts. after Rows 52, 53, 56, 57; 2 sts. after Rows 60, 61, 64, 65, 68, 69; 1 st. after Rows 72, 73, 76, 77, 80, 81, 84, 85; 2 sts. after Rows 88, 89, 92, 93, 96, 97; 3 sts. after Rows 100, 101; 9 sts. after Row 104.

ON EACH SIDE, increase 1 st. after Rows 16, 28, 40, then knit to Row 52.

ROWS 0 to 16: Knit even, then begin the Holding Position Design and work the repeated Color Stripes as marked in the Diagram of the back section.

Cast on 54 sts. with color 1 and work stockinette st.

Cast on 57 sts. with color 1 and work 16 rows stockinette st., then bind off all sts.

KG 1949 Humpty

MATERIAL: 2-50 gr. balls Red, 1 ball each of Pink, Blue, Yellow KNITTING Flamingo Dralon. (If you order 3 balls of Red and 1 each of the other colors you will have enough yarn for two toys). **TENSION:** 6 to 8. **GAUGE:** 14 sts., 19 Rows 2". **PATTERN:** Stockinette Stitch with Color Stripes of 2 Rows Blue, 2 Rows Yellow, 2 Rows Red. Dacron or Polyester filling (do not use foam chips).

FINISHING: Weave all the sts. together that are held on contrast waste yarn and remove the waste yarn. Weave body seams leaving an opening for stuffing, then stuff and close opening. Weave leg and arm seams then stuff and close top openings. Weave back seam of Hat. Cut oval shaped eyes from black felt and blind stitch onto face. Embroider mouth. Sew arms in place, then sew legs in place. . . (See Picture). Sew Hat to head and make pom pom out of scraps of color and sew to tip.

BODY and FACE: With Red, cast on 90 sts. Knit 1 row to the left side. Put 45 needles on the right side into holding position and work short rows over the 45 needles on the left. ON SAME SIDE as CAM BOX, put 2 needles into holding position beginning next 17 rows (do not wrap yarn). (11 needles remain in work). Wrap the yarn around the inside needle this one time, bring all the needles on the right into working position and knit 1 row. Knit even to Row 50, then begin the color stripes. *2 rows Blue, 2 rows Yellow, 2 rows Red and REPEAT from * ending with 2 rows Blue. (Row 76). Change to Pink yarn and knit to Row 94. Put 45 needles on the LEFT side into holding position and work short rows over the 45 needles on the right side. ON SAME SIDE AS CAM BOX, put *1 needle into holding position beginning next 2 rows, then 2 needles beginning next 2 rows and REPEAT from * till 13 remain in work (Row 116). Wrap the yarn this one time and bring back into working position *1 needle OPPOSITE CAM BOX beginning next 2 rows, 2 needles beginning next 2 rows and REPEAT from * till all are in work (Row 138). Knit 1 row to the left side over all the needles then remove work onto contrast waste yarn.

LEGS: With Red, cast on 22 sts. Knit even to Row 66. Change to Blue and knit 10 rows even then put 11 needles on the left side into holding position and work short rows over the 11 needles on the right side as you did before. *Put 1 needle same side as Cam Box into holding position beginning next 8 rows (4 x on each side). Wrap the yarn this one time and bring back into working position, 1 needle OPPOSITE CAM BOX beginning each row till all are in work*. Knit 4 rows even, then REPEAT the short rows from * to *. After Row 112, bring all the needles into working position and remove onto contrast waste yarn.



Knit the second leg section with reverse shaping, casting on from right to left and working the foot section on the left side. (Cam Box will be on the left at Row 0).

ARMS: With Blue, cast on 22 sts. and work color stripes *2 rows Blue, 2 rows Yellow, 2 rows Red and REPEAT from * ending with 2 rows Blue (Row 56). Change to Pink and knit even to Row 64. Put 11 needles on the LEFT side into holding position and work short rows over the 11 needles on the right as you did before. Put 1 needle same side as Cam Box into holding position beginning next 6 rows. Wrap the yarn this one time, then bring back into working position 1 needle OPPOSITE CAM BOX beginning next 6 rows. After Row 76, bring all the needles into working position then remove onto contrast waste yarn. Work the second arm section with reverse shaping casting on from right to left and work the short rows on the LEFT side.

HAT: With Blue, cast on 73 sts. Knit 10 rows, then hang hem. Work color stripes - 2 rows Red, 2 rows Yellow, 2 rows Blue to Row 30. Change to Red and knit 2 rows. ON EACH SIDE, decrease 1 st. every other row to Row 44, then ON EACH SIDE, decrease 1 st. EVERY ROW to Row 74. Bind off 3 sts.

KG 1950 DICKEY

MATERIAL: 3 - 50 gr. balls KNITTING Subita Crepe 2 x 3. **TENSION:** 4 to 6. **GAUGE:** 17 sts., 23 rows 2".

BACK: Cast on 131 sts.

ROWS 1-16: Work even, then hang the cast on sts. back onto the machine behind the latches to form the hem. (Knit the next row 2 tension settings higher).

ROWS 17-162: Work even.

ROWS 163-174: SHOULDER SHAPING: Work short rows. Put 5 needles opposite Cam Box into holding position beginning next 12 rows. After Row 174, knit about 10 rows with contrast waste yarn over the center 71 sts., then remove these sts. from the machine. Move the Cam Box to the right side, bring the right side shoulder needles back into working position and knit 1 row with tension 10 over these needles, then crochet these sts. off. Crochet the left shoulder sts. off in the same manner.

FRONT: The front is worked the same as the back to Row 140.

ROWS 141-174: NECK and SHOULDER SHAPING: Work short rows. Put all the needles to the left of the 0 needle into holding position (close these needle latches for identification) and complete the right half first. After Row 140, then on every other row on neck side, put 7 needles 1 x, 4 needles 1 x, 3 needles 1 x 2 needles 8 x and 1 needle 6 x into holding position, and AT THE SAME TIME, after Row 163, then on every other row, SHAPE SHOULDER by putting 5 needles 5 x into holding position. After Row 173, put the last 5 shoulder needles into holding position, move the Cam Box to the right side, bring the shoulder needles into working position and knit 1 row with tension 10 over these needles, then crochet these sts. off. Move the Cam Box to the left side, bring all the sts. to the left of the 0 needle back into working position, turn the Row Counter back to 140 and complete the left half. Follow the instructions from Rows 141 to 174 but the first time put only 6 needles into holding position. After the left side shoulder sts. are bound off, knit several rows with a contrast waste yarn over the center 71 sts., then remove the sts. from the machine.



KG 1953 FROG

MATERIAL: 1 50 gr. ball Yellow, 1 ball Green, about 2 yds. red for mouth. Frog Eyes; small white beans for stuffing (or plastic granules.) **PATTERN:** Stockinette Stitch. **TENSION:** 3 to 5. **GAUGE:** 16 sts. 23 rows = 2". You can make the increases and decreases on the edges.



UNDERBODY

ON THE LEFT SIDE OF 0 needle, bring 18 needles into working position. Cast on over these needles. *ON OPPOSITE SIDE OF CAM BOX, put 5 needles into holding position at Row 0 and after Row 1. ON OPPOSITE SIDE OF CAM BOX, bring back into working position, 2 needles after Rows 2, 3, 4, 5; 1 needle after Rows 6, 7.*

**DECREASE 1 st. OPPOSITE CAM BOX after Rows in () and INCREASE 1 st. after Rows 9 (9), 13, 17 (17), 21, 25 (25), 29, 33 (33), 37, 41 (41), 45. Knit to Row 46. (23 sts.)*. Leave a long end of yarn and break off. Put these needles into holding position.

Beginning with the 0 needle, cast on 18 sts. to the right. Put the Counter at 0. REPEAT the instructions from * to * and from ** to **. Do not break yarn. Put these needles into holding position and move the Cam Box to the left side. Bring the center 10 needles into working position and with long end of yarn, cast on over these needles then put them into holding position. Bring the 23 needles on the right side into working position and with end of yarn, knit 1 row to the right side. Return the main ball of yarn to the Yarn Container and Feed Finger. Bring all the needles into working position, turn the Row Counter back to 46 (56 sts.).

ON CAM BOX SIDE, INCREASE 1 st. after Rows 48, 49, 52, 53, 54, 55. (62 sts.)

ON EACH SIDE, DECREASE 1 st. after Row 58 and again every other row 10 x more. (40 sts.). Knit even to Row 84.

ON CAM BOX SIDE, INCREASE 1 st. at the beginning of next 32 rows (16 x on each side). (72 sts.). Knit to Row 118.

ON EACH SIDE, hang the 19th sts. onto the 18th needle, put the center 34 needles and the 18 needles on the left side into holding position. *Knit even to Row 124. ON CAM BOX SIDE, DECREASE 1 st. after Rows 124, 130. Knit to Row 136, then knit short rows. ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position after Row 136, 2 needles after Row 137, 1 needle after Row 138, 2 needles after Row 139. ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position after Rows 140, 141. Bind off the crochet method.*

Move the Cam Box to the left side, bring the 18 needles on the left into working position, turn the Row Counter back to 118 and REPEAT the instructions from * to *.

Bring the remaining 34 needles into working position, turn the Row Counter back to 118. ON EACH SIDE, decrease 1 st. after Rows 120, 124, 128, 132. Knit to Row 136, then knit short rows.

ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position after Row 136 and after EVERY ROW to Row 152 (8x on each side). ON OPPOSITE SIDE OF CAM BOX, bring all the needles into working position after Rows 152, 153, then bind off LOOSELY the crochet method.

UPPER BODY - Make 2 (1 with reverse shaping)

RIGHT SECTION

Cast on 19 sts. Follow the Under Body Instructions from * to * and from ** to ** (24 sts.) This completes one leg section - do not break yarn. Cast on 6 sts.

ON CAM BOX SIDE, INCREASE 1 st. after Rows 48, 49, 53, 54, 55. ON CAM BOX SIDE, INCREASE 1 st. after Rows in () and ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows 58, 60 (60), 62, 64, 66 (66), 68, 70, 72 (72), 74, 76, 78 (78), (84). (29 sts.).

ON CAM BOX SIDE, INCREASE 1 st. after Rows 85, 87, 89, 91, 93, 95, 97, 99, 100, 101, 103, 105, 107.

ON CAM BOX SIDE, INCREASE 1 st. after Rows in () and DECREASE 1 st. after Rows 108 (109), (111), (113), 114 (115). Knit to Row 119. (45 sts.).

Counting from the LEFT SIDE, (right for 2nd section), hang the 21st st. onto the 20th needle. Put all the needles on the right (left for 2nd section) into holding position and work the left side (right for second section). Knit even to Row 125. Turn the Row Counter to 124. ON CAM BOX SIDE, decrease 1 st. after Rows 124, 130, knit to Row 136 then knit short rows. ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position after Row 136, 2 needles after Row 137, 1 needle after Row 138, 2 needles after Row 139. ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position after Rows 140, 141. Bind off the remaining 18 sts. the crochet method (loosely).

Bring the remaining 24 needles into working position. Attach yarn at the LEFT (right for second section) side and knit 1 row to the right (left for second section). Turn the Row Counter to 120.

ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows in (). ON CAM BOX SIDE, DECREASE 1 st. after Rows 120 (120) (124), 126, (128), 132 (132).

ON CAM BOX SIDE, continue to decrease after Rows in () and ON OPPOSITE SIDE OF CAM BOX work short rows. Put 1 needle into holding position after Rows 136, 138 (138), 140, 142, 144 (144), 146, 148, 150. After Row 151, bring all the needles into working position, knit 1 row then bind off the crochet method (loosely).

Make the second upper section with reverse shaping, casting on from LEFT to RIGHT. Cam box will be on the LEFT side at Row 0.

FINISHING: You may sew the pieces together on the sewing machine, or use a back stitch if you do not have a machine. With right sides together, sew the center seam of upper body sections. With right sides together, sew upper body to under body leaving the space between lower legs open for stuffing. Turn to the right side. Insert Frog eyes (see picture). Fill body with white beans (not too full) then close opening. With red yarn, single crochet across the seam at mouth for approximately 3 1/2".



FINISHING: Block the sections - lower edges 15", side edges 13", shoulders 3 1/2". Sew the right shoulders together, then hang the neckline sts. back onto the machine. Transfer every other sts. to the Ribber, having 2 sts. on one end on the main machine (one extra stitch may have to be picked up). Knit 70 rows with ribber tension 5, then bind off all sts. the crochet method for ribbing. Join the left side shoulders. If the Collar is to be worn turned to the inside, weave the Collar seam together from the right side, 1 st. in from each edge. If the Collar is to be worn turned to the outside, weave a little less than half from the right side and the remainder from the wrong side. Turn under 5 sts. around side edges. Give final pressing.



MATERIAL: 2 balls red, 1 ball white, 1 ball green KNITKING Flamingo Dralon. (If you order 2 more balls for a basic color, you will have enough of the contrasting colors to knit another sock). **TENSION:** 7 to 9. **GAUGE:** 14 sts. 19 rows = 2". **PATTERN:** Stockinette St. and JAC 40 and Pattern No. 5. Put the Pattern Card into the JAC 40 UPSIDE DOWN and use only the 18 rows of the tree section . . . or you can use any design you wish for the Cuff providing it does not exceed 42 rows. If you want to put a design on the leg section, center it on each side such as in the Snowflake Design which is Jac Pattern No. 27A with all holes covered except the Snowflake (use scotch tape). Mark needle 20 on each side of 0 and use this to place the red center guide of the Jac 40. Begin the design 6 to 10 rows down after hanging the hem for cuff.

FINISHING: Weave the leg seam 1 st. in from each edge, being sure to catch the open stitch on each side at the heel end. Weave the open sts. of the heel to the leg section. Make a cord over 3 needles with tension 3 and knit 100 rows. (KNITKING machine owners, make cord by pushing the right Cam Control Button back). Fold cord in half and sew to the inside at top of stocking.

by picking up each cast on st. and place them onto the needles behind the latches. Knit the next row with Tension 10, then turn the tension back to 8 and knit to Row 152.

ON EACH SIDE, decrease 1 st. after Rows 152, 160, 168, 176, 182, 188, 194, 200, 206. Knit to Row 228 then ON EACH SIDE remove 16 sts. onto a stitch holder. Knit even to Row 238 then decrease 1 st. ON EACH SIDE. (30


sts.). Knit even to Row 286 then work Short Rows.

Change to white yarn, ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position 11 x on each side (8 remain in work). ON OPPOSITE SIDE OF CAM BOX, bring back into working position 1 needle 11 x on each side (Row 330). Change to red yarn and knit even to Row 388. REPEAT the instructions from * to *. After Row 432, remove the sts. onto a stitch holder.

KG 1951 CHRISTMAS SOCK

Cast on 82 sts. with red. Knit to Row 42, then begin the color stripes and Pattern.

Knit 4 rows white, 2 rows red, 4 rows white, 2 rows red, 18 rows Tree pattern (be sure to put the pattern card into the JAC 40 from the end opposite arrows). Knit 2 rows red, 4 rows white, 2 rows red, 4 rows white. After Row 84 hang the hem



KG 1954 BABY FROG

MATERIAL: 1 50 gr. ball Yellow, 1 Green KNITTING Allegro Dralon (will make 2). Small amount of Red for mouth. Small white beans for stuffing — or plastic pellets. Small Frog eyes. **PATTERN:** Stockinette Stitch. **TENSION:** 3 to 5. **GAUGE:** 16 sts. 23 Rows = 2". Make increases and decreases on the edges.

UNDER BODY

With Yellow, cast on 12 sts. *ON OPPOSITE SIDE OF CAM BOX, put 4 needles into holding position at Row 0 and after Row 1. ON OPPOSITE SIDE OF CAM BOX, bring back into working position, 2 needles after Rows 2, 3, 4, 5. ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows in () and ON CAM BOX SIDE, INCREASE 1 st. after Rows 7 (7), 9, 11 (11), 13, 15 (15), 17, 19 (19), 21. Knit to Row 24*. Put these needles into holding position. To the left of these needles, leave 4 empty needles and cast on 12 sts. from right to left. Cam Box will be on the left side at Row 0. Follow the instructions from * to *. Knit 1 row to the right and cast on 8 sts. Put all the needles on the left into holding position and bring the 16 needles on the right into working position and knit 1 row to the right. Turn the Row Counter to 24. (40 sts.).


ON CAM BOX SIDE, INCREASE 1 st. after Rows 28, 29, 32, 33. ON EACH SIDE DECREASE 1 st. after Rows 36, 38, 40, 42, 44, 46, 48. Knit to Row 50.

ON CAM BOX SIDE, INCREASE 1 st. after Rows 52 and 53 and again on EVERY ROW 20 x more on each side. (52 sts.) After Row 74, ON EACH SIDE, hang the 13th st. onto the 12th needle. Leave the 12 sts. on the right in working position and put all the needles on the left into holding position. *Knit even to Row 80. ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position after Rows 80, 81, 82, 83, 84, 85. ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position after Rows 86, 87. After Row 88, bind off all sts.* Move the Cam Box to the left side, bring the first 12 needles into working position, turn the Row Counter to 74 and REPEAT the instructions from * to *.

Bring the remaining 26 needles into working position, turn the Row Counter to 74. ON EACH SIDE, DECREASE 1 st. after Rows 76, 78, 80, 82, 83, 84, 85. Knit to Row 88, then work short rows. ON OPPOSITE SIDE OF CAM BOX, put 2 needles into holding position after

Rows 88, 89, 90, 91. ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position after Rows 92, 93. After Row 94, bind off all sts.

UPPER BODY — Make 2 (1 with reverse shaping). With Green, cast on 14 sts. and REPEAT the instructions for Under Body leg from * to Row 32. Cast on 5 sts. ON CAM BOX SIDE, INCREASE 1 st. after Rows 25, 28, 29, 32. ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows in (), and ON CAM BOX SIDE, INCREASE 1 st. after Rows 33, 37 (37), (39), 41 (41), (43), 45 (45), (47), 49 (49). ON CAM BOX SIDE, INCREASE 1 st. after Rows 52, 53, 54, 56, 58. ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows in () and INCREASE 1 st. after Rows 60 (60), 62, 64 (64), 66, 68 (68), 70, 72 (72). After Row 74, hang the 15th st. onto the 14th needle (counting from the right - left for second section), put the 17 needles on the left (right) into holding position and work the leg. Knit even to Row 80. ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding



position after Rows 80, 81, 82, 83, 84, 85. ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position after Rows 86, 87. After Row 88, bind off all sts.

Bring the remaining 17 sts. into working position. Turn the Row Counter back to 74. ON OPPOSITE SIDE OF CAM BOX, DECREASE 1 st. after Rows 76, 77, 79, 80, 81, 83, 84, 85, 86. ON OPPOSITE SIDE OF CAM BOX, put 1 needle into holding position after Rows 87, 89, 91. After Row 93, bring all the needles back into working position and knit 1 row, then bind off the remaining 7 sts.

Work the second section with reverse shaping, casting on from right to left. Cam Box will be on the left side at Row 0.

FINISHING: Finish in the same manner as larger Frog.

KG 1952 HOLIDAY SLIPPERS

SIZE: Small, with medium and large in (). **MATERIAL:** 1 50 gr. ball for small; 3 50 gr. balls for two pair of medium or large, KNITTING Dunja and 1 50 gr. ball Flamingo Dralon in a contrast color for lining each pair. 4 small bells. **PATTERN:** Stockinette st. **TENSION** 5 to 7 for Dunja; 4 to 6 for Flamingo Dralon. **GAUGE:** 11 sts., 14 rows = 2" using Dunja. USE EVERY OTHER NEEDLE for both yarns. When transferring the specified sts., KNITTING machine owners, bring the needles into holding position and release all sts. from under the sinkers, then transfer the sts.

With Dunja, cast on 27 (29-31) sts. OVER EVERY OTHER NEEDLE. Work short rows. Put 10 needles OPPOSITE CAM BOX into holding position at Row 0 and after Row 1. Be sure to wrap the yarn around the inside needle in holding position. ON OPPOSITE SIDE OF CAM BOX, bring back into working position, 2 needles at a time till all are in work (wrap the yarn each time). Counting from the RIGHT, hang the sts. from needles 2, 4, 6, 8, 10, 12 (also 14 for medium and large sizes) onto the adjacent needle to the LEFT. Counting from the LEFT, hang the sts. from needles 2, 4, 6, 8, 10, 12 (also 14 for medium and large sizes) onto the adjacent needle to the RIGHT. There should be 6 holes on each side of the center needle for small size; 7 holes on each side of center for medium and large sizes (the medium size will have 3 sts. on the center needle). Leave empty needles in work and knit 2 rows.

Work self wrap short rows: ON SAME SIDE AS CAM BOX, put 1 needle into holding position beginning each row until 7 remain in work. Wrap the yarn around the inside needle in holding position this one time only.

ON OPPOSITE SIDE OF CAM BOX, bring 2 needles back into working position, knit across, then return 1 needle to HOLDING POSITION (the needle right next to those in holding). REPEAT from ** - always bringing 2 needles opposite Cam Box back into work, knit across, then put 1 needle back into holding position each time until all needles are in working position.*

Knit 16 to 18 rows for small (20 to 22 rows for medium - 24 to 26 rows for large).

REPEAT the SHORT ROWS from * to * and from ** to ***. Knit 2 rows. Change to Flamingo yarn and turn the tension down 1 number lower. Knit 2 rows.

REPEAT the SHORT ROWS from * to * and from ** to ***. Knit 16 to 18 rows for small (20 to 22 rows for medium - 24 to 26 rows for large).



REPEAT the SHORT ROWS from * to * and from ** to ***. Knit 2 rows. Eyelet across the same way as you did before, leave empty needles in work and put 2 needles OPPOSITE SIDE OF CAM BOX into holding position before knitting the next 10 rows and be sure to wrap the yarn around the inside needle in holding position each time. There will be 10 needles on each side in holding position.



ON OPPOSITE SIDE OF CAM BOX, bring all the needles back into working position before knitting the next 2 rows. Hang the cast on sts. onto the machine behind the latches. There will be 2 sts. on each needle. Turn your tension to 8 and knit 1 row with Dunja yarn, then holding this yarn, use it to crochet the sts. off one at a time - loosely.

CORD FOR TIES. (Every needle). Pick up 2 sts. close to the hole on side of slipper. Set your machine for knitting a cord (KNITTING Machine owners, push back the Right Cam Control Button) and with tension 3, knit 102 rows. Bind off. Make cord on other side and on second slipper.

FINISHING: Pull and stretch into shape, tucking the lining inside. With right side facing you and beginning at the LEFT of toe (as it faces you), use a No. 1 crochet hook and Dunja Yarn, slip stitch crochet around slipper catching loops of lining with outside edge to close the sides of slipper. DO NOT PULL SIDES TIGHTLY. When you reach the heel, slip stitch into the whole OUTSIDE stitch only (not the lining) and pull up rather tight along the heel. Continue around to the beginning of toe, end off. Run the cord through the eyelets to meet at center and pull up tightly then tie in bow. Sew small bells to ends of ties.



MK 5391 — For school or play . . . a three piece outfit that is very easy to knit . . . and easy to care for when knitted with KNITKING Regia for a Size 6 and Allegro Dralon for Sizes 8 and 10. Follow the Chart for the Norwegian Design on the Skirt . . . or use your Jac 40 and Pattern No. 463.

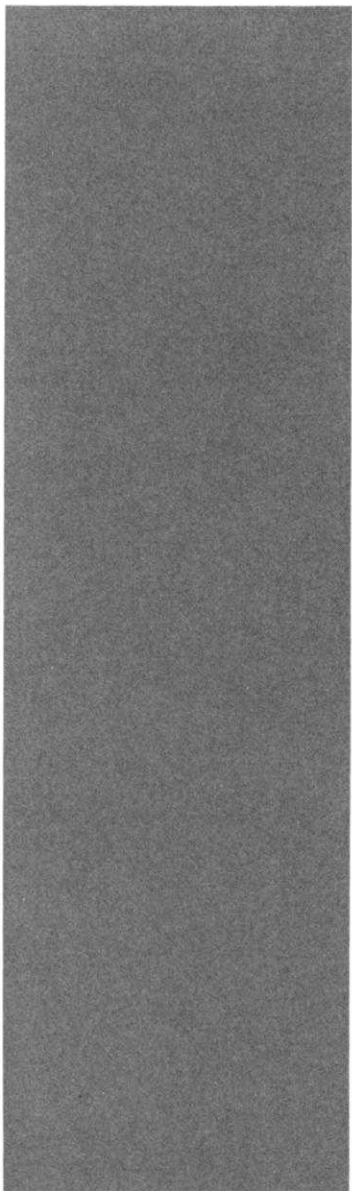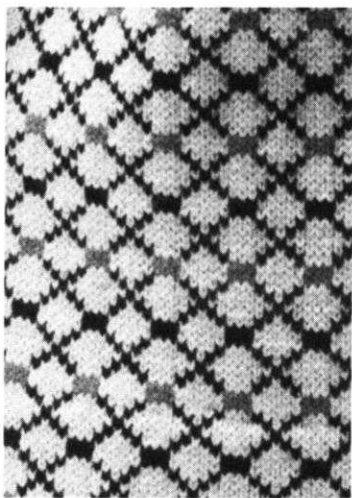

The complete Ensemble

DK 8127 — The perfect holiday ensemble for our Half size friends . . . A gorgeous dress with a Chevron Eyelet Design on the front and back, has its own matching three quarter length coat banded in a contrasting color. You can wear the coat over a skirt or a pantsuit as well. Size 16½ is knitted with KNIT-KING Crocus Crepe; Size 18½, Melodie; Size 22½, Dolly Dralon Crepe.



MK 5389 — She's making her own bubbles and having fun too . . . dressed in a bright holiday dress. Stockinette stitch with a Cable Design. The bands are ribbed. Size 2 and Size 4 . . . both knitted with Knitking Amore.

DK 8125 — Slip into a pretty double breasted Coat Dress knitted in stockinette stitch with bands of contrast color. Size 10 is knitted with KNITKING Beatrice; Size 12 with Crocus Crepe; Size 14, Amore.








KG 1950 — A Man or Woman can wear this for a layered look. Tuck the Dickey into the neckline of any open neck garment. Knit it with KNITKING Subita Crepe 2 x 3.



KG 1952 — Holiday Slippers are made with short rows over every other needle using two weights of yarn . . . They're knitted in one continuous piece - just change the yarn for the lining and knit on and on . . . Fun to knit, and a perfect gift. Use KNITKING Dunja and Flamingo Dralon. Trim them with little bells or any novelty.



KG 1953 and KG 1954 — Fat and sassy, Mrs. Hopalong and her baby take small amounts of Allegro Dralon. Fill them with beans or rice for a doorstop and bean bag (they'll stay in any position) . . . or fill them with dacron filler for stuffed toys.

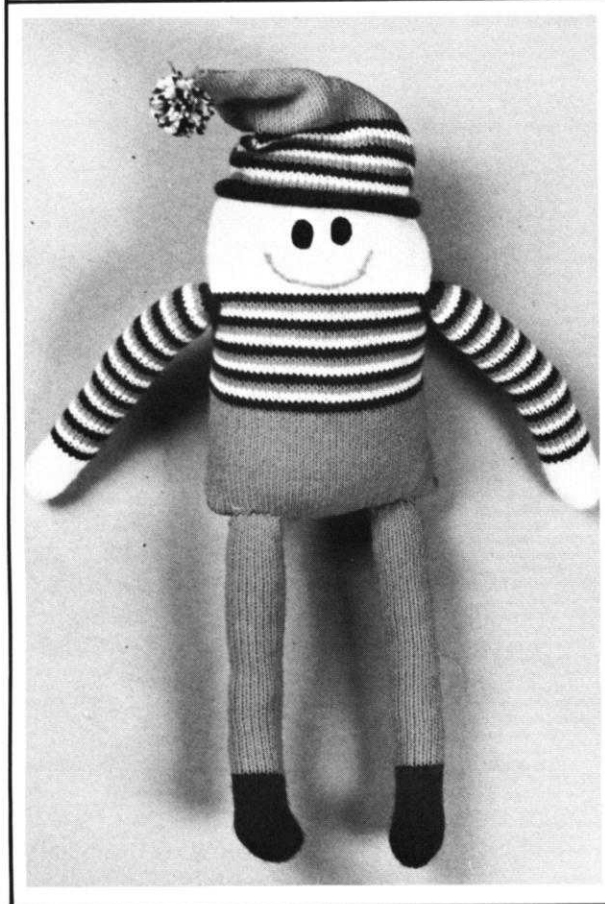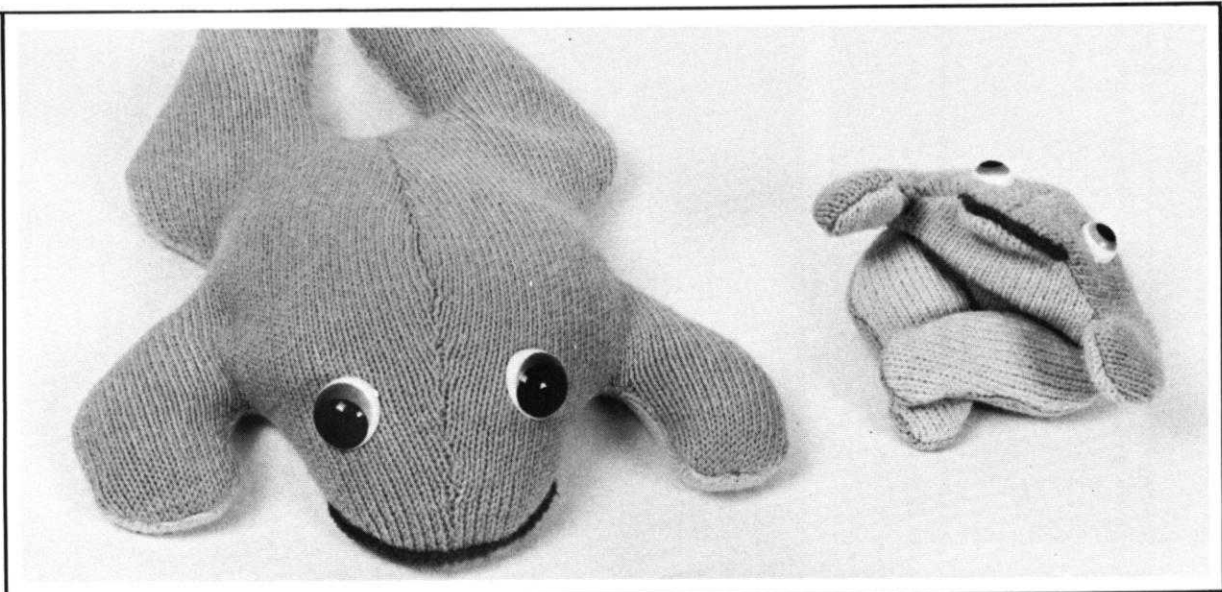

KG 1949 — This Humpty can take any fall without breaking . . . a cuddly toy to be loved by all children. Knit him with KNITKING Flamingo Dralon.

KG 1951 — "And the Stockings were hung by the chimney with care . . ." Plenty of room for stuffing all the goodies you can think of . . . Easy to knit with Flamingo Dralon, these stockings can be trimmed any way you wish and there is room for embroidering the name of your favorite child (or adult).



Slim and Trim

DP 8128 — A very flattering Pullover has a Holding Position Design and a Cable Design on each side of the front section. Flattering to any figure, you will want several of these. All bands are ribbed. Size 14, KNITKING Beatrice; Size 16, Crocus Crepe; Size 18, Regia.

MK 5390 — She's "forever blowing bubbles" and it's more fun if she's wearing her brand new dress knitted in bright colors and a Holding Position Design. The purl side is the right side. Size 4 is knitted with KNITKING Beatrice; Size 6 and Size 8 are knitted with beautiful machine washable Allegro Dralon.





What you need is
a new "baby" in
the house...

... the amazing

baby lock

**For the
first time
a cut, sew
and overlock
machine at a price every
housewife can afford!**



($\frac{1}{4}$ the cost of a commercial machine)

BABY LOCK IS TOUGH

It can stand the punishment of professional tailors, dressmakers, drapery shops, etc. This makes it ideal for use in the home or even the motor home.

BABY LOCK HANDLES ALL FABRICS

It's the modern sewing machine that's just perfect for all materials from fine lingerie, georgettes and voiles to polyester, double knits and heavy suiting materials.

NEW MODEL EA605 IS 3 MACHINES IN 1

It overlocks, it sews a stretch stitch (ideal for the new stretch fabrics) and it cuts your material all at the same time. Or you can do any one or two of the operations separately. It carries 4 threads on 2 needles and 2 loopers without bobbins or rewinding of threads.

SMALL IN SIZE, BIG IN PERFORMANCE

Baby Lock is compact, weighs only 24 pounds. Yet it can do anything a commercial machine can do at a fraction of the price. It's the easiest, least expensive way to make clothes for the entire family.

Please send FREE information including **low** cost of the amazing "baby lock."

to Knitking Corporation

1128 S. Crenshaw Blvd., Dept. 874
Los Angeles, Calif. 90019

KNITTING NEWS

November/December, 1972

OUR READERS WRITE

"I am never satisfied with how stockinette stitch bands look when I sew them onto the neckline of my garments... How can I make them look professional?".....

Our KNITTING experts tell us this is the way they do it....

In order to neatly sew a stockinette stitch band to a neckline or armhole, it is essential that the neckline (or armhole) of your garment has been shaped with short rows. To shape the armholes (or neckline), put the needles holding the stitches to be bound off into holding position after the Rows indicated... (when binding off - the stitches are bound off ON CAM BOX SIDE, but when working short rows, needles ON OPPOSITE SIDE of CAM BOX are put into holding position). After all the armhole stitches (or neckline stitches) are in holding position, take a separate strand of your garment yarn, lay it over the open latches of the needles in holding position, push them gently back into working position, then with the strand of yarn, knit them BY HAND loosely. Now you can bind them off using the crochet method and BE SURE to maintain the same tension on the crochet bind-off as on the garment section. You must use a separate strand of yarn for EACH ARM-HOLE but when you are shaping the neckline, wait until both sides have been knitted and ALL of the neck stitches are in holding position, then use the separate strand of yarn to bind them all off at one time.

When you are knitting the stockinette stitch neck-band (or armband for a sleeveless garment) cast on the specified number of stitches and BE SURE TO MARK THE CENTER STITCH with a bit of yarn. Now as you knit, you should turn the Tension Dial DOWN as you work toward the center, then turn it UP again for the second half. For instance, if the band is 16 rows, each half will be 8 rows. If you are knitting with Tension 5, after casting on, knit 2 rows tension 5; 2 rows tension 4; 8 rows tension 3; 2 rows tension 4; 2 rows tension 5. You can use this tension change trick for knitting ANY neck or armhole band that will be doubled over - including any ribbed band. Bind off the crochet method neatly, being sure to maintain the same tension on the crochet bind-off as on the knitted piece. Of course if your pattern for the armhole band says to increase, then decrease on each end, be sure to do it.

Pull up the cast-on edge (see Practical Knitting Hints Book, page 40). Weave the short ends of the band together. With the right side of the band to the wrong side of the garment, pin the cast on edge of the band evenly to the neckline, being certain to match the center front and place the seam at the center back (for the armholes, place the seam at the underarm and center marking at the shoulders). Using a loose overcast stitch, sew the band to the neckline by inserting the needle into the cast-on stitches of the band, then into the bound-off stitches of the garment neckline (or armhole). Do not pull the yarn too firmly as the stitches should be elastic. When

you have completed this, fold the band over to the outside and pin it in place (you will note that it falls right into the proper place) covering the over-cast edge. The yarn you use may have to be split to obtain a thin strand to sew with. Use a sharp needle and back stitch the band in place by going into the center of each bound-off stitch of the band.

Our "New Look" KNITTING MAGAZINE was certainly well received by our readers and we thank those who wrote such nice letters telling us how pleased they were with it... Many readers made comments on the Renewal Questionnaire that we send out and we think you will enjoy reading a cross section of them.....

Mrs. Byron W. Tuley, Kirkwood, Missouri: "I mailed my subscription card without enclosing this questionnaire. I just wanted to tell you that the September/October issue of KNITTING was just wonderful - I want to make everything, so I found it just to my liking."

Mrs. Delma Welch, Edmond, Washington: "Don't make it any better!! I have difficulty in finding the time to knit all the garments I like for myself and family shown in the magazine now!"

Mrs. Murray Sutton, Jr., Livingston, Montana: "Keep it coming! I show my KNITTING MAGAZINE to other machine knitters but I never loan it - I tempt them, then give them your address."

Fay J. Steed, Massillon, Ohio: I recommend KNITTING MAGAZINE to all my students. We have classes in all phases of machine knitting. We appreciate the small projects as well as all the regular patterns."

Mrs. Althea Wallington, Pensacola, Florida: "Just keep up your standard. It is the best I have found even tho I do not own a KNITTING. It is the life saver of machine knitters. I recommend it highly."

Mrs. D. D. Monroe, Sterling, Colorado: "Just keep it coming. I couldn't get along without it."

KNITTING CABLES or EYELET DESIGNS

Any time you knit a pattern where stitches have to be crossed, or eyelets made over the same set of needles continuously (such as DP 8128, MK 5389, DP 8114 in this issue), mark the Needle Rail of your machine where the Cables or Eyelets will go. You can use a bright crayon or a china marking pencil and it is only necessary to mark the CENTER STITCH of each group in your pattern. Each time you make the Cable or Eyelet, RELEASE the STITCHES (over which you make the design) from under the Sinkers. This will make it easy for you to cross or move the appropriate stitches.

HINT...HINT...

Do you turn down the idea of knitting a garment that looks difficult for you to make...? Try knitting a SMALL SECTION FIRST - such as the sleeve... or the front section of a jacket...etc. You will gain the needed confidence and work up tremendous enthusiasm to go on to complete what you THOUGHT was difficult.

USED MACHINES OF OTHER BRANDS

We take hundreds of machines in trade on KNITTING machines. Many of them are in brand new condition.. some have never had a garment made on them... We offer them for resale twice a year and have a good selection for you to choose from now... All machines listed are sold on a cash with order basis and sent out freight collect... The prices are so low, they are almost silly... They are sold on "first come, first served" basis. We have several of each brand and if any that you order are sold out when your order arrives, we will return your money to you... You can also use your BankAmericard or Master Charge Card and if you send a personal check for any substantial amount, you will receive your machines much faster if you have the check certified.

KNITTING SALE OF TRADED MACHINES

Single Bed		Condition	Sale Price	
Brothers 550	Sells for \$79.50	Excellent	\$ 30.00	
531		Very good	30.00	
Lacemaker - Model 585	Sells for \$239.00	Very good	85.00	
Empisal (Sears) Model 250	- sells for \$179.50	Excellent	50.00	
The Empisal 250 has a wider needle spacing than standard Japanese machines and is more suitable for heavier yarns.				
Empisal 100		Excellent	35.00	
Empisal Knitmaster Model 305 & Ribber		Like new	175.00	
Sells for \$329.00. This is the same machine as the Studio 305				
Genie 1800 & Ribber	Sells for \$199.00	Like new	125.00	
Genie 1500	Sells for \$99.50	Like new	50.00	
Genie - Jiffy		Like new	20.00	
The Genie is perfect as a Christmas Gift for a youngster and you cannot buy a toy machine at this price.				
Speed-O-Knit	Gold color with automatic Lock	Sold for \$269.50	Excellent	45.00
Studio 301	with Ribber	Good	95.00	
Studio 303		Very good	65.00	
Studio 106		Like new	50.00	

Double Bed

Although double bed knitting machines have never been popular in the U.S.A., they have some features that make them useful for certain knitting functions.... They do knit tubular and they usually do excellent ribbing... Knitters sometimes buy used double bed machines from us for these two functions alone... You can pay much higher prices than ours for a ribbing attachment that you have to adapt to your own machine... You can do your ribbing on a double bed knitter and transfer it to your single bed machine and still have the use of the double bed machine for other purposes.

Duomatic	Sold for \$419.50	Very good	125.00
Swiftomatic	Sold for \$329.00 to \$399.00	Like new	125.00
Swiftomatic	Used	Excellent	75.00
Swiss Magic	Sold for \$399.00	Excellent	75.00
Orion 360	Sold for \$329.00	Excellent	75.00
Orion 440	Sold for \$469.00	Like new	150.00
Because of its wide needle bed, and extra needles, the 440 is the most popular in the Orion range.			
Three Star	360 needles	Excellent	60.00
The Three Star double bed is made for fine yarns. Its needles are closer together than other machines. A good machine for skinny rib garments in light weight yarns.			

All prices F.O.B. Los Angeles.



A sincere wish for
Happiness and Peace
this Holiday Season and throughout
the New Year.



NOTES TO KNIT BY . . .

STITCH AND ROW GAUGE

KNIT A SAMPLE SWATCH . . . before you begin to knit any garment . . . for this is the MOST IMPORTANT STEP toward the correct size and the proper fit of any garment you wish to make. You MUST use the SAME YARN for your sample swatch that you will use to knit your garment and your sample swatch must be knitted large enough and using several different tension numbers on your machine. When you have done this, then you can determine the number of stitches and the number of rows in a two-inch measure. KNITTING MAGAZINE PATTERNS give you 3 tensions to try and one of them should give you the correct stitch and row gauge if you are using the yarn we recommend or a similar weight yarn. Here is the way to make your sample swatch.

Cast on over a sufficient number of needles to produce a swatch at least 4 inches wide. (If the pattern calls for 16 stitches to 2", then 16 x 2 = 32 stitches to cast on). Now knit 4 inches of rows at the first suggested tension number. (If the pattern calls for 22 rows to 2", 22 x 2 = 44 rows to knit). Knit 2 rows using a contrast color, change to the next higher tension and with garment yarn knit another 4", knit 2 rows with contrast color, change to the 3rd higher tension and knit another 4" and then bind off.




Roll the swatch into a cylinder over its length and pull on both ends, unroll it and stretch it diagonally by pulling on the four corners. Allow the swatch to rest and settle (preferably overnight) and then using a stitch gauge or a ruler, count the number of stitches over a 2" width, then the number of rows over a 2" length in EACH of the 3 tensions. Select the tension number that produces the stitches and rows called for in the pattern. If none of them are correct, you are most likely using the wrong weight of yarn.




READING OF CHARTS


You will notice the instructions start at the bottom of the Chart and work UP. Follow the charts exactly as written and providing your sample stitch and row gauge is correct, your garment will come out the right size. Please remember that the section of garment as it is knitted on the machine, faces the same way as the Charts are in this magazine. Where two front pieces are needed, (or any other part of a garment that needs two sections) only one section is normally shown and the second section is usually made with reverse shaping. Set in sleeves are usually identical, but raglan sleeves have to be knitted with reverse shaping for the second sleeve.


READING OF SYMBOLS

To simplify Pattern Knitting, we use Symbols in the Line Drawings and the Chart Diagrams. In the Line Drawings the symbols are shown and are to be read as you look at them while knitting a garment. For instance, if

a Purl stitch faces you, the Purl stitch Symbol  is shown; if a knit stitch faces you (as when using the Ribber) then this Symbol  is shown. The Symbol  at the top of the Line Drawing is the center of the garment section and you use this as a guide for setting up the needles.

The following Symbols    are used for Eyelet Designs in the Line Drawings and also for Full Fashion shaping on the Charts. The Line Drawings have row numbers on the right side. Missing Row numbers are always knitted straight or plain.

In Holding Position Designs  selected needles are pushed into holding position for the stated number of rows. The numbers of rows appear at the right of the Line Drawings; Example: 1-4 means knit Rows 1 to 4; 5 to 7 means knit Rows 5 to 7, etc. This same Symbol is also shown on the Charts and is used for putting needles into holding position for Short Rows. The

Symbol  on the Charts is used to put needles back into working position when knitting Short Rows.

A number in a box stands for the number of rows to be knitted between shapings. Make shaping first, then knit the necessary number of rows. If for instance it reads:

1 st. 8 x



1 st. 10 x



As you will be reading the instructions from the bottom up, here is the way you will follow them: . . . Decrease or increase (depending on the direction of the garment outline) 1 st. at the row where the shaping begins, then knit 8 rows, make the next decrease, then knit 8 rows, until you have decreased (or increased) 1 st. 10 x and you have knitted 8 rows after each decrease (or increase) (1 st. 10 x +8 rows 10 x). Now begin the first decrease (or increase) for the shaping (which has to be made 8 x) in every 6th row. Decrease (or increase) 1 st. first, then knit 6 rows until you have decreased 1 st. 6 x and after each decrease (or increase) have knitted 6 rows (1 st. 8 x + 6 rows 8 x).

Where shapings are given without a boxed number as on most armholes, necklines, etc., make the shapings on every second row (on each side of course).

(See below for more Pattern Stitch Symbols.)

PATTERN STITCH SYMBOLS



= knit stitch



= purl stitch



= empty needle (leave in working position)



= needle not used (in the out of work position)



= needle in the holding position



= Needles back into working position.



= 2 stitches on 1 needle — either transferred from the right side or the left side, then put the needle into holding position



= needle holding 2 stitches. Stitch has been transferred from the LEFT



= needle holding 2 stitches. Stitch has been transferred from the RIGHT



= 3 stitches on 1 needle. The 1st and 3rd stitch in a group of 3 needles has been hung on the 2nd or center needle.



= Center of Garment Section.



= Number of rows to be knitted between shapings.

The diagrams (Line Drawings) for pattern work are followed just as they are shown and are to be read as you look at them while knitting the garment.

open darts



closed darts



