


Knits for Joy

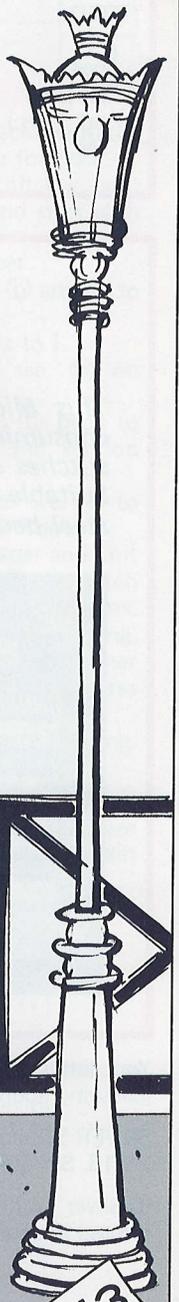


VOL. 143

SYMBOLS/ABBREVIATIONS

- S.D. — Stitch Dial (The figure in circle indicates
Stitch Dial number.)
pos. — position
st. (sts.) — stitch or stitches
nd. (nds.) — needle or needles
sec. — section

Mid-gauge Garter Bar Set GB6

This Mid-gauge Garter Bar Set speeds up time-consuming stitch work such as transferring multiple stitches or purling a complete row. Suitable for use with all 6.5mm pitch (4 gauge) steel bed and plastic knitters.

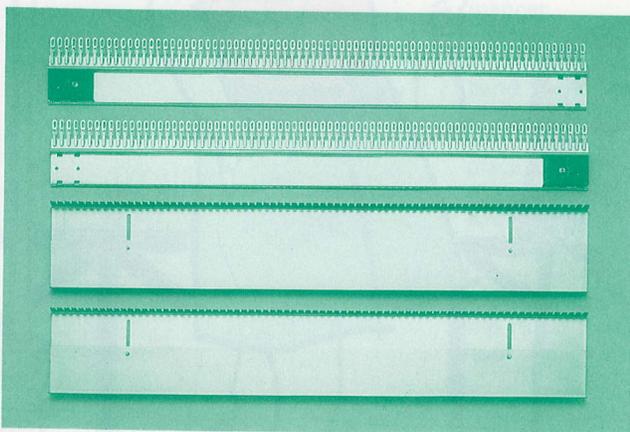


Your letters to "Knits for Joy" are always welcomed at the following address:—

SILVER SEIKO LTD.
28-15, Shinjuku 1-chome, Shinjuku-ku, Tokyo, 160 Japan

©Silver Knitting Institute, Tokyo, Japan
Printed in Japan 94.9.4M(53)

Pattern Chart for Tuck Stitch

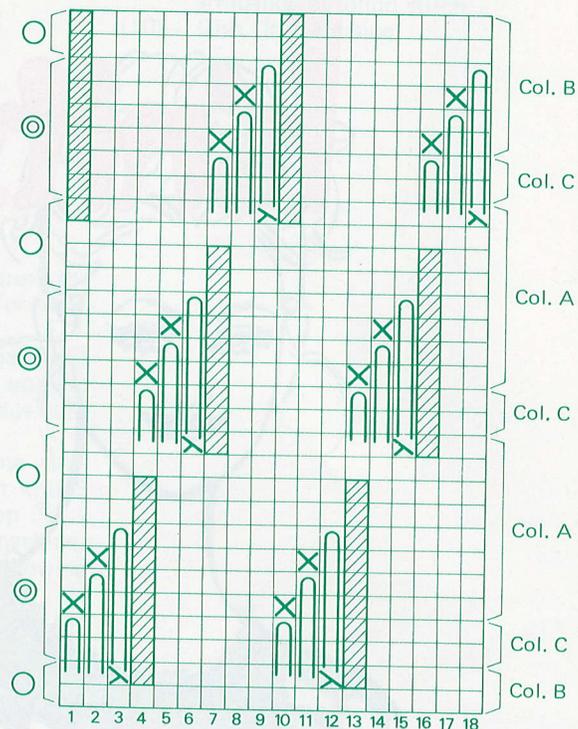

- nd. in B pos.
- ▨ nd. in A pos.
- ⊗ Push the nd. back to C pos.
- ∩ nd. in D pos.
- ↘ Transfer the st. to adjacent nd. on left
- Russel Levers to II
- ⊙ Russel Levers to I

LADY'S SLEEVELESS TOP

Finished measurements Size: cm.

	A	B	C
Bust	96	100	104
Length	53	55	57

Materials/others:

Medium type ribbon

Col. A (blue).....200 – 250grs.

Col. B (white)..... 50 – 80grs.

2 strands of light yarn

Col. C (yellow)..... 30 – 40grs.

6.5mm. pitch machine (LK150 or SK860) with Knit Contour

Tension Gauges(on LK150):

Ⓐ 22 sts. by 38 rows over a swatch of Tuck Stitch with S.D. at ⑤

Ⓑ 22 sts. over a swatch of K1.P1. Rib with S.D. at ③ and Garter Stitch with S.D. at ③.5 (for armband and welt)


Ⓒ 19 sts. over a swatch of K1.P1. Rib with S.D. at ③ and Garter Stitch with S.D. at ③.5 (for neckband)

To knit

Knit side is worn as right side.

Knit back and front in Tuck Stitch and neckband, armbands and welts in K1.P1. Rib and Garter Stitch, following the patterns given on pages 4 – 5 and instructions below. The instructions are on the LK 150.

Back

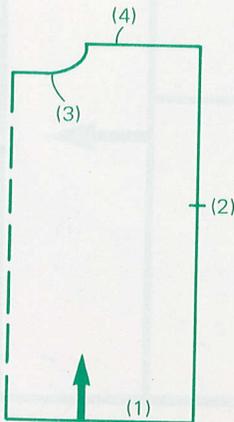


- (1)– Set Row Number and Stitch Scale on the tension gauge Ⓐ
- Set Pattern Paper for back and lock at the starting line.
- Cast on the required number of sts. for back and knit several rows with waste yarn.
- Knit 1 row with a ravel cord.
- Release Pattern Paper and knit 2 rows in Stockinet with S.D. at ⑤ using Col. A.
- Set the Carriage as follows.
 - Side Levers (both) ▲
 - Russel Levers (both) I
 - Stitch Dial..... ⑤
- Hang Claw Weights on both edges.

N.B. It is recommended to hang more weights evenly across the knitting or hold the knitting downward by hand while knitting.
- Knit back in Tuck Stitch following the Pattern Chart on page 1.
 - ①– Transfer every 9th st. to the adjacent nd. on left and push the empty nds. back to A pos.
 - ②– Push the nds. marked with Π to D pos. and set both Russel Levers to I.
 - ③– Knit 2 rows with Col. C.
 - ④– Knit 4 rows with Col. A, pushing the nds. marked with x back to C pos.
 - ⑤– Set both Russel Levers to II and knit 2 rows with Col. A.
 - ⑥– Pick up 8 crossing yarns in front of the nds. in A pos. and place them onto their corresponding empty nds.
 - ⑦– Knit 2 rows with Col. A.
 - ⑧– Repeat the steps ① – ⑦ following the pattern chart.
- (2)– Knit up to the armhole and put yarn marks on both sides.
- (3)– Shape neckline by partial knitting by decreasing sts. following the contour line.

N.B. Set both Russel Levers to I while working partial knitting.
- (4)– Remove the sts. for neckline and each shoulder respectively on waste knitting.


Front

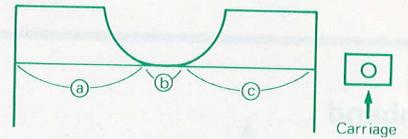

- (1)–(2) Knit up to front neckline in the same manner as done for back.
- (3)– From the neckline knit the right and left separately and start with the Carriage side.
 - Lock the Pattern Paper.
 - Push the nds. for sec. (b) and (c) to D pos.
 - Set both Russel Levers to I.
 - Remove the sts. for sec. (a) on waste knitting.
 - Push the nds. for sec. (b) back to C pos. and remove the sts. on waste knitting.
 - Push back the nds. for sec. (c) to B pos. with a Transfer Tool.
 - Release the Pattern Paper and knit up to shoulder in Tuck Stitch shaping neckline by decreasing sts.
- (4)– Remove the sts. on waste knitting.
- (5)– Knit sec. (a) in the same manner as done for sec. (c) but reverse shaping.
 - Remove the sts. on waste knitting.


To make up

- (1)– Pin out each piece to correct size and shape and press with a steam iron.
- (2)– Knit welts in the following manner.

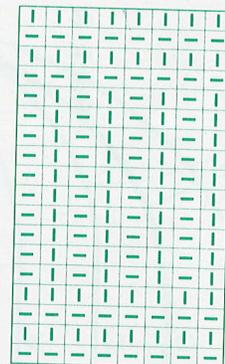

— knit stitch
 | purl stitch


- ①— Push the same number of nds. as the number of sts. on the first row of back or front to B pos.
- ②— With the wrong side of back or front facing you, pick up and place the sts. on the first row of main knitting onto the nds. in B pos.
- ③— S.D. **3.5**, knit 2 rows in Stockinet with Col. A and reform the sts. on the second row with a Tappet Tool as shown below to have Garter Stitches.

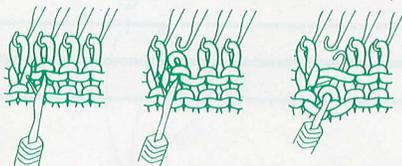

Insert the Tappet Tool into the stitch below the stitch on the needle.

Remove the stitches from the needle.

Catch the bar in the hook of Tappet Tool.

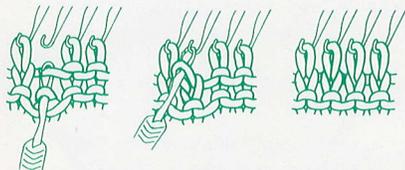


Pull through the stitch below.

Replace the reformed stitch on the needle.

Repeat all along the row.

- (4)— Knit neckband in the following manner.



- On the tension gauge **C** push the required number of nds. for neckband to B pos.
 - With the wrong side of back and front facing you, pick up and place the sts. along neckedge onto the nds. in B pos.
 - Knit neckband in the same manner as done for welt but knit 5 rows for K1.P1. Rib in step ⑤.
- (5)— Join left shoulder on the machine.
 - (6)— Knit armband in the following manner.
 - On the tension gauge **B** push the required number of nds. for armband to B pos.
 - With the wrong side of back and front facing you, pick up and place the sts. along armhole onto the nds. in B pos.
 - Knit armband in the same manner as done for welt.
 - (7)— Close the sts. on the last row of welts, neckband and armbands by slip stitch and chain with a crochet hook using Col. A as shown below.




- (8)— Join side seams by blind stitch.
- (9)— Join both ends of neckband and armbands by blind stitch.
- (10)— Give final pressing.


HINT GB6 (Garter Bar for 6.5mm. pitch machines) is very helpful to work Garter Stitches.

- ④— Repeat step ③ once more.
 - ⑤— S.D. **3**, knit 10 rows in Stockinet and reform the sts. on alternate nds. with a Tappet Tool for K1.P1. Rib.
 - ⑥— S.D. **3.5**, repeat step ③ twice.
 - ⑦— Remove the sts. on waste knitting.
- (3)— Join right shoulder on the machine.



●..... slip stitch
○..... chain

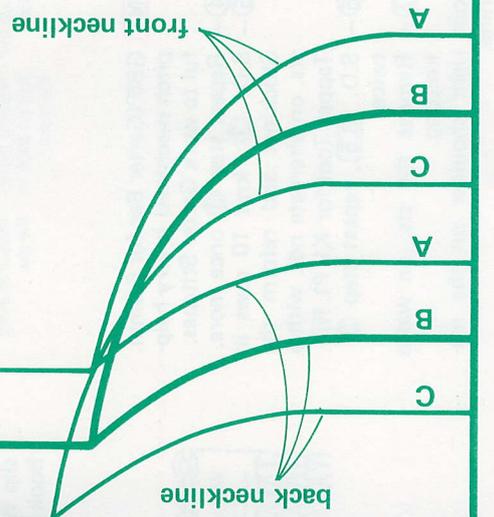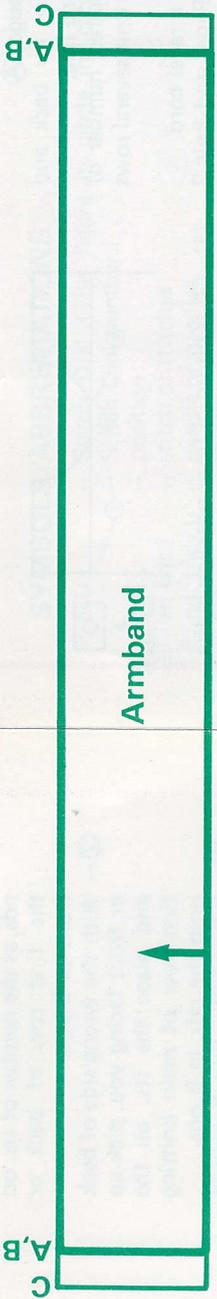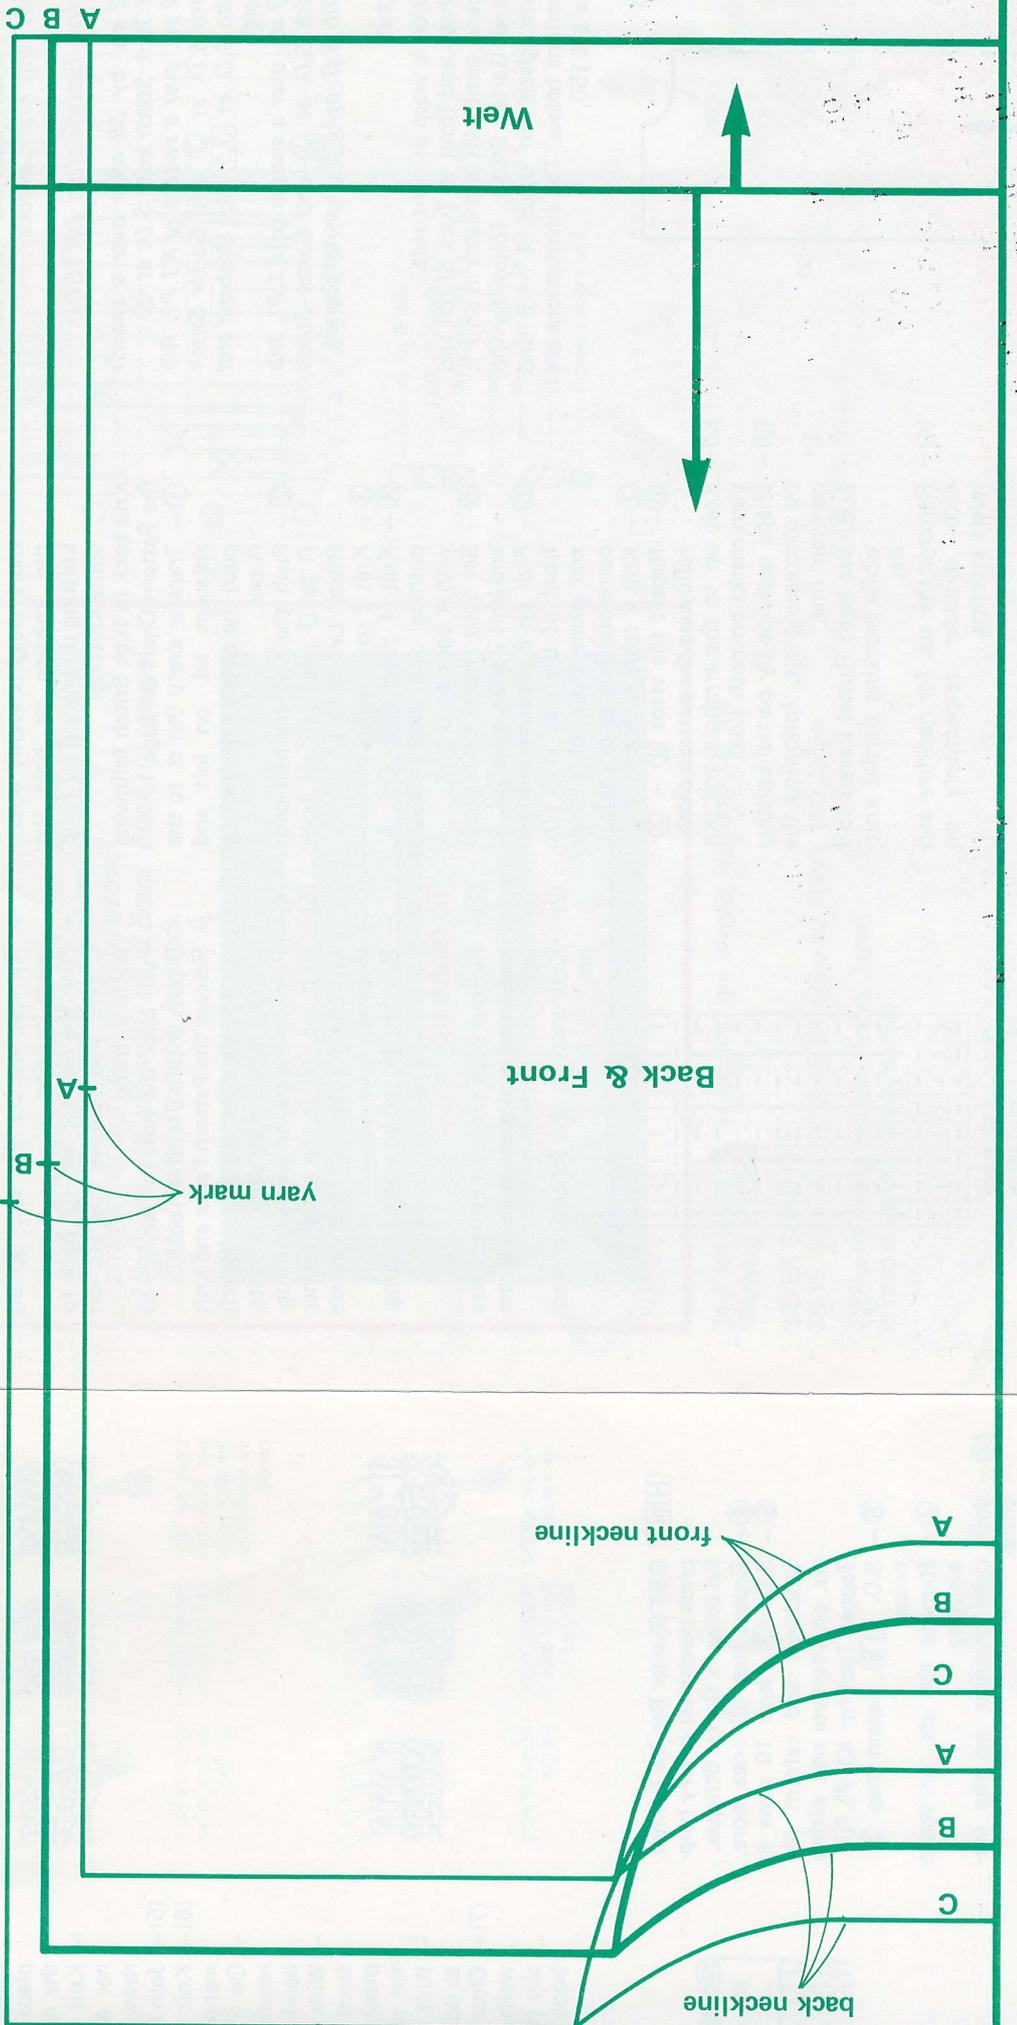

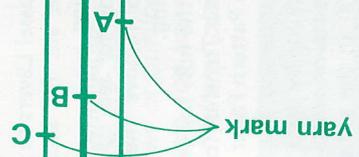

Back & Front

