


INSTRUCTIONS ON USE FOR THE BULKY KNIT

ACCESSORIES

Garter Bar - 3 pcs.]
Bar Connector - 2 pcs.] - 1 set

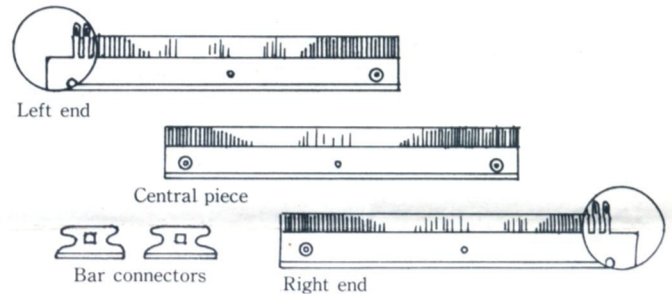

GARTER STITCHES

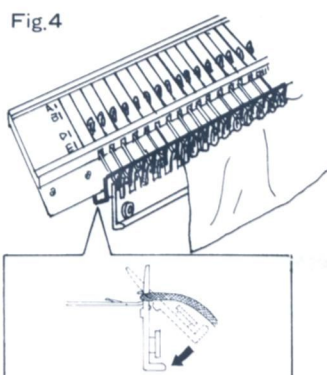





Fig. 1

Fig. 2

Fig. 3

Fig. 4

fabric

fabric

fabric

fabric

fabric

fabric



PARTIAL GARTER STITCH (PARTIAL KNITTING)

You would want to knit Garter Stitch while doing Partial Knitting. The problem here is how to handle the yarn end which is in the middle of the row as in the case of Partial Knitting. Please follow the instructions below :

1. Raise the yarn end above the machine needles before placing your Garter Bar on the needles and transfer all stitches to the Garter Bar.
2. Turn over the Garter Bar and bring the yarn end toward you. Transfer the stitches to the knitting needles.




To make use of this Partial Garter Stitch, you are able to knit Garter Stitch in one portion of the fabric and Stockinette Stitch in another portion.


The mark - - - - indicates purl stitch, i.e. the knitting as knitted by the machine.

The mark — indicates the knitting that is made when it is turned over by using the Garter Bar.


1. Knit one row and make Partial Knitting up to the A point that starts the Garter Stitches in the second row.
2. Turn the fabric over using the Garter Bar and knit the rest of the second row.
3. Turn the fabric over again with the Garter Bar and operate the Carriage without knitting for one row. Then make Partial Knitting up to point A.
4. Repeat the above procedure.

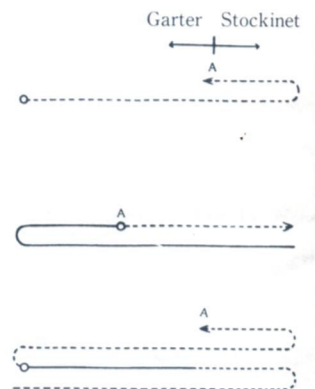

E OF THE GARTER BAR TTER MODEL SK-120

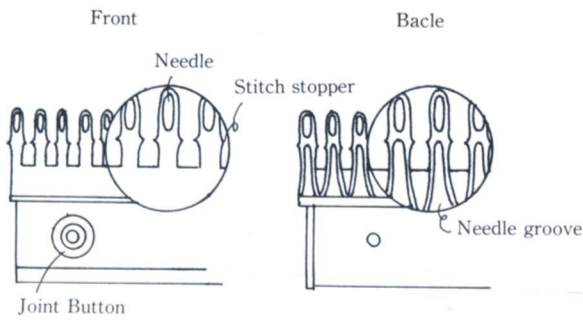

Joint the Bars with using Bar Connector as shown below.

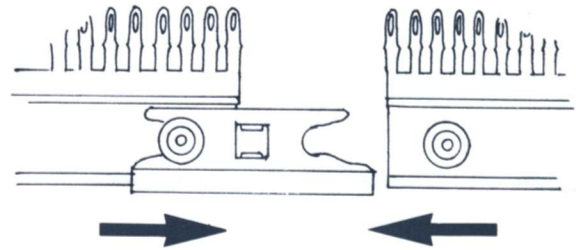

LACE PATTERN (OPEN PATTERN)

1. Push those needles for making the Lace Pattern to E position. (Fig. 1)




Fig. 1

2. Push the rest of the needles forward but as far as the stitches will not go over the latches. (Fig. 2)




Fig. 2

3. Push the needles in E position back and align all needles. (Be careful not to close the latches of the needles.)




Fig. 3

4. Place the eyes of the Garter Bar needles onto the hooks of the machine needles and pull them all the way to E position. Gently pull the fabric forward. (The stitches in the pattern positions are transferred to the Garter Bar. Fig. 3)




Fig. 4

5. Remove the Garter Bar while opening the needle latches. Transfer the stitches to the neighbouring needles. (Fig. 4)




Fig. 5

6. Tilt the Garter Bar so that the stitches will slide down and stitches will pile up in a single movement. (Fig. 5)



CABLE STITCHES

1. Using the same method as for Lace Pattern, transfer a group of 4 stitches from the machine needles to the Garter Bar. (Fig. 1)

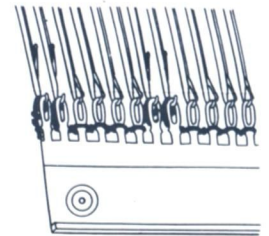


Fig. 1

2. Move the Garter Bar to the left, over the space of two needles. (Fig. 2)




Fig. 2

3. Push back the right two stitches of the 4 stitch group to the machine needles. (Fig. 3)




Fig. 3

4. Move the Bar to the right over the space of four needles and push back the other two needles.




Fig. 4

