



VOL. 123

## SYMBOLS ABBRIVIATIONS

SD — Stitch Dial (The figure in circle indicates Stitch Dial number.)

sec. — section  
 pos. — position  
 st. (sts.) — stitch or stitches  
 Nd. (Nds.) — needle or needles

It's so much fun, you'll be in stitches

## MODEL LK140

The first thing you'll notice about the LK140 is how incredibly easy it is to use. You can start knitting straight away and you'll soon be able to make knitwear with all sorts of interesting patterns.

Another feature of the LK140 is that it's extremely lightweight and compact making it easy to store and carry. But don't be deceived by its size — it can handle a wide range of yarns from medium to very thick and the roller-capped latch needles ensure extremely smooth and quiet operation.



Your letters to "Knits for Joy" are always welcomed at the following address:—

S.S.C.  
 P.O. Box 5095, Tokyo International  
 Tokyo, 100-31, Japan

© Silver Knitting Institute, Tokyo, Japan  
 Printed in Japan 88.4.3.5M(32)

## ROUND YOKE PULLOVER & PLEATED SKIRT

Finished measurements size: cm.

	A	B	C
Bust	96	100	104
Sleeve Length	53	54	55
Top length	54	55	56
Waist	60	64	70
Skirt length	67	69	71

### Materials/others:

Medium weight yarn (70% alpaca 30% silk)

beige pullover ..... 210grs.  
 skirt ..... 180grs.  
 green pullover ..... 10grs.  
 skirt ..... 40grs.  
 white pullover ..... 15grs.  
 skirt ..... 45grs.

Elastic band (2.5cm wide, 60 ~ 70cm long)

Waste yarn ..... reasonable amount

Machine ..... Mod. LK140

### Tension Gauge:

15 sts. by 18 rows over the swatch of Stockinet with S.D. ②.


28 sts. by 40 rows over the swatch of K2.P2. Rib. with S.D. R .

## ROUND YOKE PULLOVER

### To knit

Knit back, front, yoke and sleeves following the patterns given on pages 5~7 and instructions below.

(back)

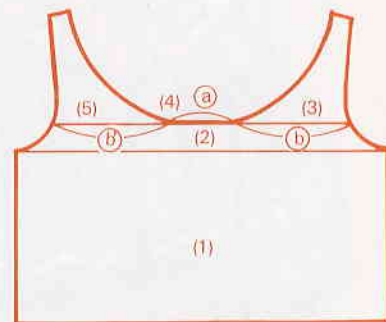



- Set the Pattern Paper for back and lock at starting line.
- Set each part as follows.  
Side Levers ..... ▲  
Russel Levers ..... II  
S.D. .... ②


- (1) — Arrange required number of Nds. in B pos. cast on with waste yarn.  
— Knit 1 row with Ravel Cord.  
— Release Pattern Paper, S.D. ②. knit up to beginning of armhole.
- (2) — Shape armhole at both sides by decreasing sts. following the contour line.
- (3) — If the Carriage is on the right side:  
— Push the Nds. for sec. ⑥ and ③ to D pos.  
— Set the both Russel Levers to I.  
— Knit up to shoulder point decreasing sts. to shape yoke line.  
N.B. If the Carriage is on the right side at shoulder point, knit 1 more row.  
— Slope shoulder by partial knitting while shaping yoke line by decreasing sts.  
— Remove the sec. ⑥ on waste knitting and push back the empty Nds. to A pos.
- (4) — Push back the Nds. for sec. ③ to C pos. and remove the sec. ③ on waste knitting and push back the empty Nds. to A pos.
- (5) — Place the Carriage on the right side.  
— Push the Nds. for sec. ⑥ to C pos.  
— Work in the same manner as for (3) but reverse shapings.

**(Front)**

- Wrok in the same manner as for back.

**(Sleeve)**

- both alike —

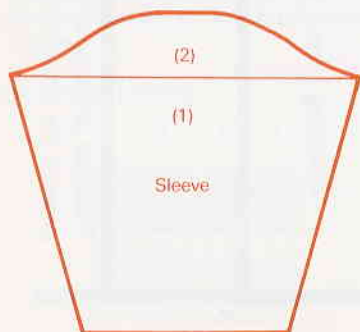

- (1) — Set the Pattern Paper for sleeve.  
— Arrange the required number of Nds. and cast on with waste yarn.  
— S.D. ②, knit following contour line in Stockinet by increasing single st. to beginning of sleeve head.
- (2) — Shape sleeve head following contour line by decreasing sts.  
— Put yarn mark at the centre and cast off sts. by a Tappet Tool.

**(Welt)**

- Arrange required number of Nds. for welt to B pos.
- With wrong side of back or front facing you, pick up sts. from back or front lower edge evenly, and place them onto the Nds. in B pos.
- S.D. R, knit the required number of rows for welt in Stockinet work in stripe pattern following the chart.
- Reform the sts. for K2.P2. Rib by using a Tappet Tool.
- Knit several rows with waste yarn and remove the knitting from the machine.

**(Cuff)**

- Work in the same manner as for welt.


**(Yoke)**

- Push the required number of Nds. for back yoke to B pos. Cast on and knit several rows with waste yarn.
- S.D. R, knit back yoke in Stockinet work in stripe pattern following the chart.
- Reform the sts. for K2.P2. Rib. by using a Tappet Tool.
- Knit several rows with waste yarn and remove from the machine.
- Knit front yoke work in the same manner as for back.


**(Trimming)**

- Arrange the required number of Nds. for back trimming to B pos.
- Cast on and knit several rows with waste yarn.
- S.D. R, knit back trimming in Stockinet work in stripe pattern following the chart.
- Knit several rows with waste yarn and remove from the machine.




**(Cuff & Welt)**



**(Trimming)**



**(Yoke)**



**How to make up**

- Block each pieces to size curving yokes and press with steam iron.

**(Join yoke)**


- Arrange the same number of Nds. for yoke to B pos.
- Pick up sts. from front top edge with right side facing you, place them onto the Nds. in B pos. evenly.
- Unravel the waste knitting.
- Push the Nds. to D pos. and bring the sts. of the fabric behind the latches.
- With wrong side facing you, pick up sts. from the first row of yoke and place them onto the Nds.
- Push the Nds. towards B pos. the rear sts. will slip off of the Nds. and inter-loop with the front sts.
- Knit 1 row with S.D. ⑦, using white yarn.
- Cast off sts. by using a Tappet Tool.
- Join back yoke as done for front.

**(Join trimming)**


- Push the same number of Nds. for trimming to B pos.
- Pick up sts. from the last row of yoke with right side facing you, push the Nds. to D pos. and bring the sts. of the fabric behind the latches.
- Pick up sts. from the last row of trimming with wrong side facing you, and place them onto the Nds.
- Push the Nds. toward B pos. the rear sts. will slip off of the Nds. and interloop with the front sts.
- Pick up sts. from first row of trimming and place them onto the Nds.
- Knit 1 row with S.D. ⑦, using white yarn.
- Cast off the sts. by using a Tappet Tool.

**(Join shoulder)**

- Arrange required number of Nds. in D pos.
- Holding one side of front & back of shoulder sts. with right side facing each other, place them on the machine.
- Push back the rear sts. behind the latches, then push back the Nds. to B pos., the rear sts. will be interlooped with front sts.
- Cast off with back stitch method using a Tapestry Needle.
- Close the open edge of welt & sleeves. (illustrated below)
- Join side and underarm seams by blind sts. Join side of yoke seams by blind sts.
- Set in sleeves.
- Give a final press.

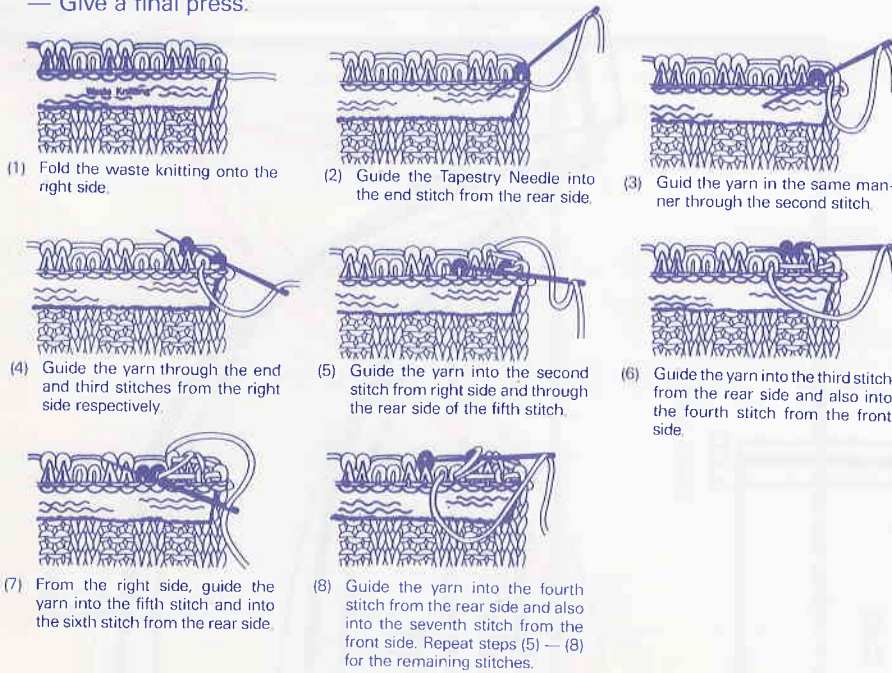


The illustration below shows how the yarn is guided into the stitches.



**PLEATED SKIRT**

**To knit**

Knit 4 pieces in the same manner following the instructions below

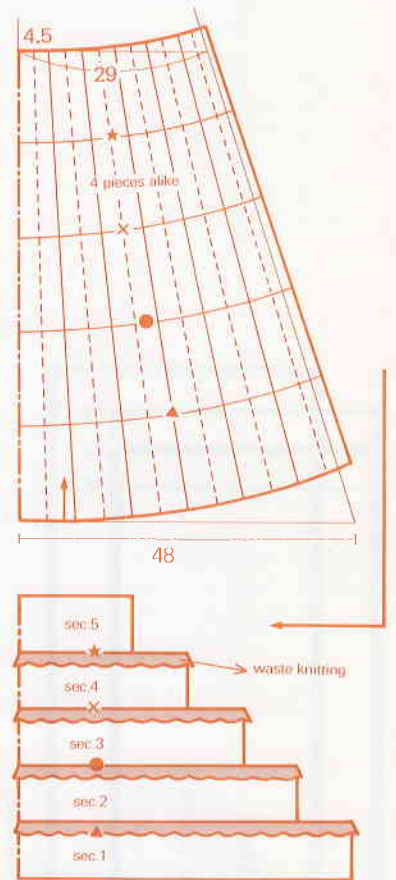


**(Knit sec.1)**

— Arrange 121 Nds. as shown below.



- Cast on with waste yarn.
- Knit in Stockinet work in stripe pattern following the chart.
- Knit up to line ▲ without shaping.
- Remove with waste yarn. (Knit each sec.38 rows)

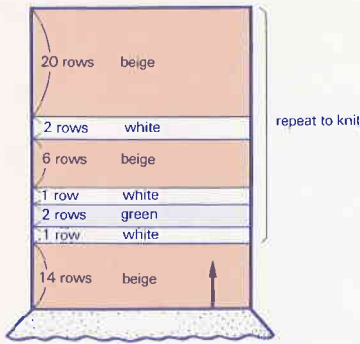


(Knit sec.2)

— Arrange 109 Nds. as shown.



— With wrong side facing you pick sts. from last row decreasing 12 sts. as shown on below.

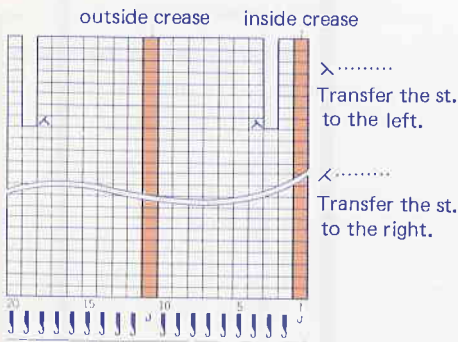


- Unravel waste knitting.
- Knit sec. 2 in Stockinet work in stripe pattern following the chart.
- Remove with waste yarn.

Sec. 3, 4, 5 work in the same manner as for sec. 2.

- Knit another 3 pieces in the same way.
- Give light press stretching pleats lengthwise.

(Knit outside crease)



- Arrange every other Nds. to B pos.
- Pick up every third sts. with right side facing you, and place them onto the Nds. in B pos.
- Push all Nds. to B pos.
- Knit 1 row with S.D. ⑤, using white yarn.
- Cast off by a Tappet Tool.

(Waist band)

- Join centre seams of back & front on the machine.
- Arrange 84 Nds. for waist band to B pos.
- Hold the waist edge with wrong side facing you.
- Fill the Nds. with sts. from last row of main yarn by decreasing sts.
- Unravel waste knitting and push the Nds. from B pos. to D pos.
- S.D. ②, knit 22 rows in Stockinet with beige yarn.
- Pick up sinker loops on the first row of waist band and place them onto the corresponding Nds.
- S.D. ⑦, knit 1 row.
- Cast off sts. by using a Tappet Tool.
- Knit another waist band for back skirt in the same manner.

### How to make up

- Join side seams on the machine.
- Leaving an opening for elastic.
- Close the lower edge.



(Wrong side facing you, fold the waste knitting onto the knit side, insert the Crochet Hook into the end st. and wind the yarn around the Hook. pull out the Crochet Hook.

Insert the Crochet Hook into the second st. and wind the yarn in the same manner and pull it out with 2 loops on the Hook. Repeat the above manner.)

- Insert the elastic band through the waist band and join both ends together.
- Close the opening.
- Sew in yarn ends.
- Hold up pleats and give a final press.



